



WIRELESS G ACCESS POINT

MULTIPLE OPERATION MODES

Can be flexibly configured to operate as an Access Point, Wireless Client, or Repeater



TOTAL SECURITY

Includes a complete set of security features including WEP encryption and WPA/WPA2 to protect your network from outside intruders



EASY CONFIGURATION

Setup Wizard and Wi-Fi Protected Setup™ (WPS) for automatic configuration/security setup and easy addition of new devices



CONNECT HOME USERS TO A WIRELESS NETWORK

Create a wireless network for your home with the DAP-1150 Wireless G Access Point. Connect this 802.11g access point to a broadband modem and wirelessly share your Internet connection to enjoy surfing the web, checking e-mail, and chatting with family and friends online.

PROTECT WIRELESS NETWORK AND DATA

The DAP-1150 provides 64/128-bit WEP encryption and WPA/WPA2 security to protect your network and wireless data. In addition, it also provides MAC address filtering and a disable SSID Broadcast function to limit outsiders' access to your wireless network.

FLEXIBLY CONFIGURE YOUR AP FOR DIFFERENT APPLICATIONS

The DAP-1150 can be configured to operate as an access point to act as a central hub for wireless users, as a wireless client to provide a wireless connection for wired devices such as a game console, or as a repeater to extend wireless coverage to cover wireless dead spots in your home or office. The DAP-1150's versatility allows it to cover a wide range of applications.


EASY TO INSTALL AND USE

With D-Link Setup Wizard, you can set up your wireless network in minutes. It configures your DAP-1150, making it easy to add new wireless devices to your network, and helps you create a simple wireless network for your home. A mode select switch on the back of the device allows you to change between the different operation modes quickly and conveniently. In addition, the DAP-1150 is Wi-Fi Protected Setup™ (WPS) certified, making it even easier to configure your wireless network and enable wireless security.

ACCESS POINT MODE



WIRELESS CLIENT MODE

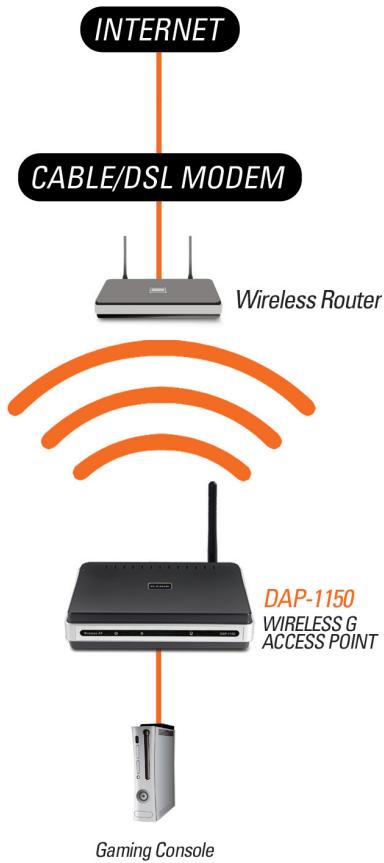

REPEATER MODE



The DAP-1150 can act as a central connection point for wireless PCs

Connect an Ethernet-enabled gaming console to the Internet by using the DAP-1150 as a wireless interface

Extend the wireless coverage of your wireless router with the DAP-1150


WHAT THIS PRODUCT DOES

Share your broadband Internet connection with multiple computers in your home by simply connecting wireless computers and devices to this Wireless G Access Point. You can now create your own personal wireless home network to share your Internet connection, play online games and make Internet phone calls wirelessly.

VERSATILE FUNCTIONS

The DAP-1150 offers you three modes of operation: Access Point Mode, Wireless Client Mode, and Repeater Mode. This allows you to flexibly configure it for use for different wireless applications. In addition, this AP gives you an Ethernet port to connect to an Internet router to share your Internet connection, or to a game console give it a wireless connection to the Internet.

YOUR NETWORK SETUP

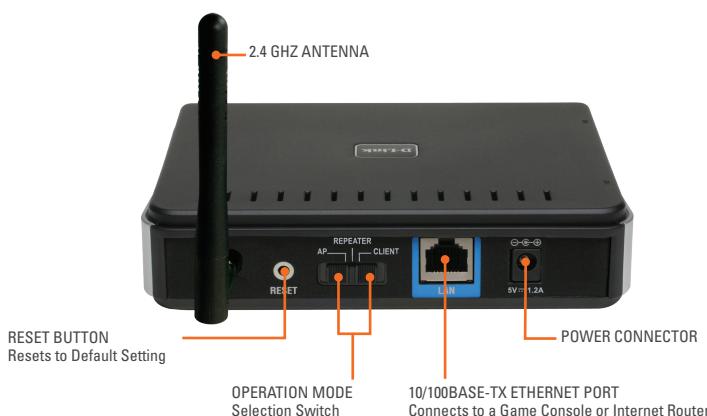

TECHNICAL SPECIFICATIONS

NETWORK STANDARDS

- 802.11g wireless LAN
- 802.11b wireless LAN
- 802.3/802.3u 10BASE-T/100BASE-TX Ethernet
- ANSI/IEEE 802.3 NWay auto-negotiation

DEVICE INTERFACES

- 802.11g wireless LAN
- 10/100BASE-TX Ethernet LAN port

OPERATING FREQUENCY

- 2.4 to 2.4835 GHz

OPERATING CHANNELS

- FCC: 11
- ETSI: 13

RADIO & MODULATION SCHEMES

- DQPSK, DBPSK, CCK, OFDM

OPERATION MODES

- Access Point
- Wireless Client
- Wireless Repeater

ANTENNA

- 2 dBi Gain detachable omni-directional antenna with RP-SMA connector

TRANSMIT OUTPUT POWER

- 16 dBm (typical)

RECEIVE SENSITIVITY

- For 802.11b, at 8% PER:
 - 11 Mbps: -80 dBm
 - 5.5 Mbps: -84 dBm
 - 2 Mbps: -87 dBm
 - 1 Mbps: -88 dBm
- For 802.11g, at 10% PER:
 - 54 Mbps: -65 dBm
 - 48 Mbps: -66 dBm
 - 36 Mbps: -70 dBm
 - 24 Mbps: -74 dBm
 - 18 Mbps: -77 dBm
 - 12 Mbps: -79 dBm
 - 9 Mbps: -81 dBm
 - 6 Mbps: -82 dBm

SECURITY

- 64/128-bit WEP data encryption
- WPA-PSK, WPA2-PSK
- WPA-EAP, WPA2-EAP
- TKIP, AES
- MAC address filtering
- SSID broadcast disable function

QUALITY OF SERVICE (QOS)

- Wi-Fi Multimedia (WMM)

DEVICE MANAGEMENT

- Web-based management through Internet Explorer v.6 or later, Netscape Navigator v.6 or later or other Java-enabled browser
- WPS Support on AP, Repeater and Wireless Client modes

DIAGNOSTIC LEDS

- Power
- WLAN
- LAN

POWER INPUT

- 5 VDC, 1.2 A
- External power adapter

DIMENSIONS (L x W x H)

- 147.5 x 113 x 31.5 mm
(5.81 x 4.45 x 1.24 inches)

WEIGHT

- 220 grams (0.485 lb)

OPERATING TEMPERATURE

- 0 to 55 °C (32 to 131 °F)

STORAGE TEMPERATURE

- -10 to 70 °C (14 to 158 °F)

OPERATING HUMIDITY

- 10% to 90% non-condensing

STORAGE HUMIDITY

- 5% to 95% non-condensing

CERTIFICATION

- FCC Class B
- CE
- C-Tick
- Wi-Fi

54 Mbps maximum wireless signal rate derived from IEEE standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, may lower actual throughput rate. Environmental factors will adversely affect wireless signal range, maximum throughput based on 802.11g devices.



ACN 052 202 838

D-Link Corporation

No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan

Specifications are subject to change without notice.

D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.

All other trademarks belong to their respective owners.

©2010 D-Link Corporation. All rights reserved.

Release 04 (April 2010)