

AC1350 **High Power Wireless Dual Band Router**

Higher Power, Greater Coverage, Faster Streaming





450Mbps + 867Mbps Dual Band Wi-Fi




Highlights


Superior Coverage


An array of high-powered features provides wireless coverage for areas of up to 10,000 square feet.

Wall-Breaking Wi-Fi

The supercharged wireless signal cuts through walls and other physical barriers, eliminating dead zones for a worry-free Wi-Fi network.

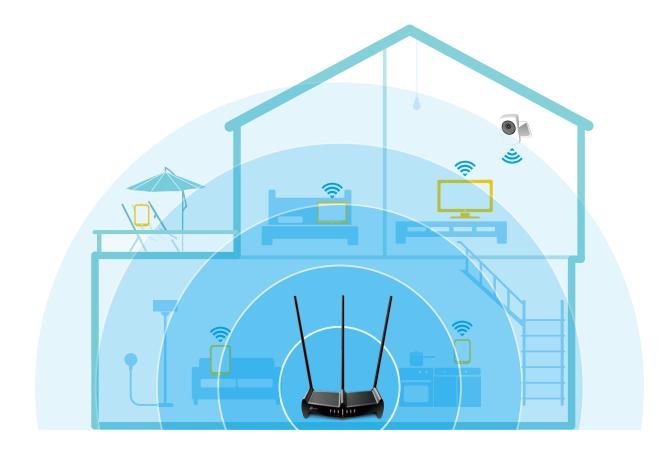

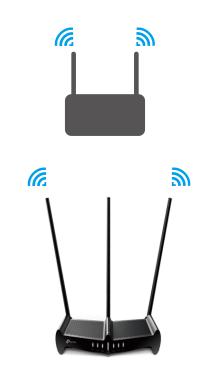

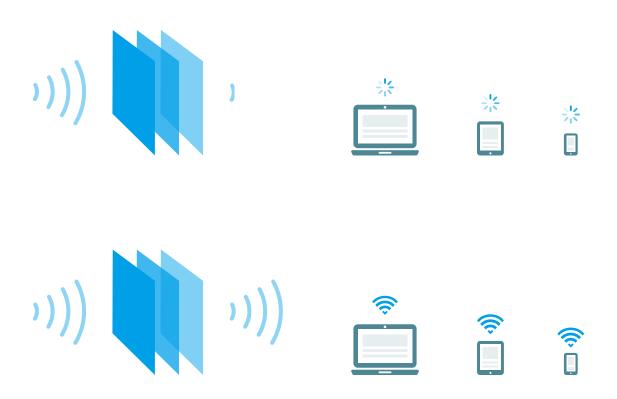


Highlights

High-Gain Stability


Three 9dBi antennas make stable connections for reliable Wi-Fi to all your devices.

Tap into Multi-Mode

The RE Button lets you effortlessly switch between router and extender modes. Access point mode is also available from the web utility or Tether app.

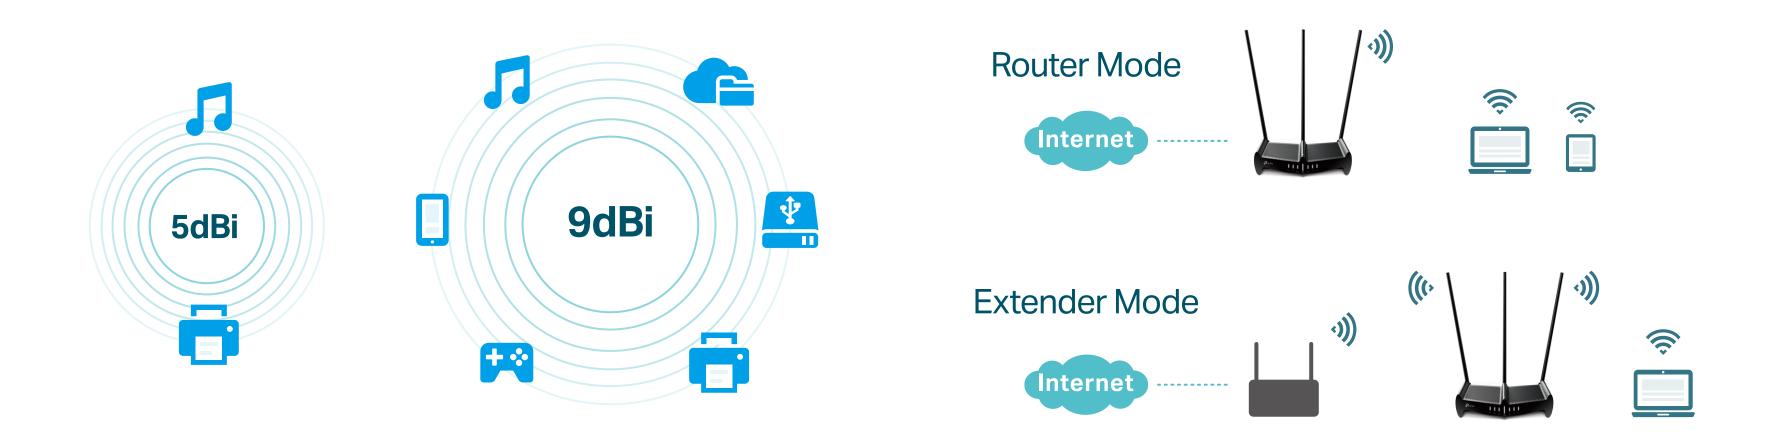

Features

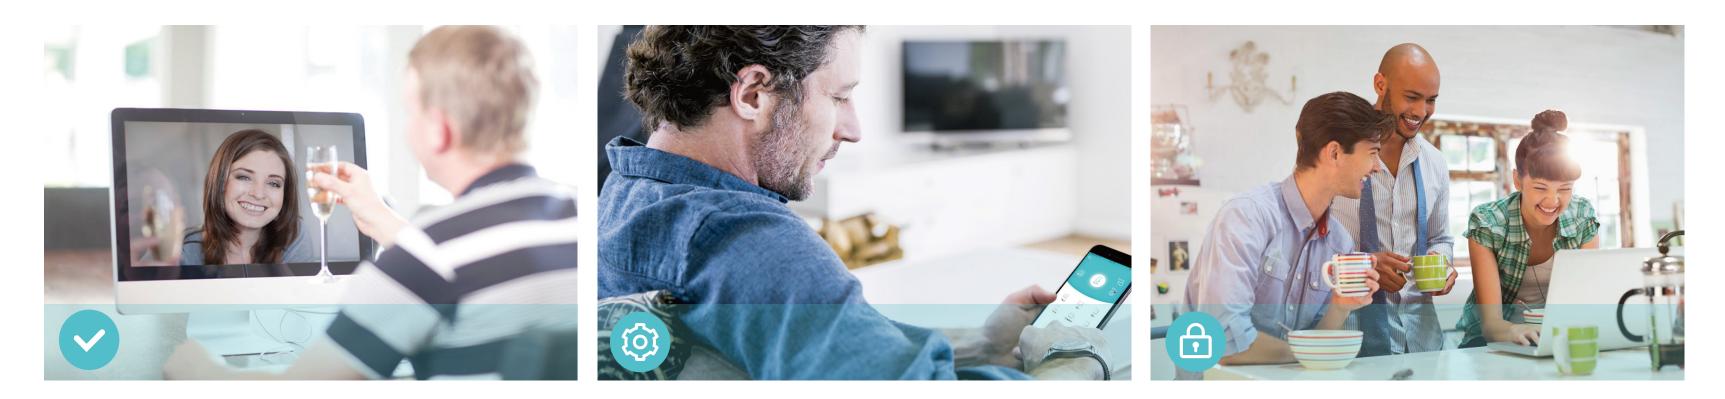

Reliability

- Ultimate Wireless Speed Combined wireless speeds up to 450Mbps over 2.4GHz and 867Mbps over 5GHz
- Support 802.11ac Provides a data transfer rate 3 times faster than 802.11n for each stream
- Easy Bandwidth Management– QoS allocates necessary speed of each connected device to ensure quality of multimedia streaming

Ease of Use

- Intuitive Web UI Ensures quick and simple Installation without hassle
 Guest Network – Keeps your main network secure by creating a separate network for friends and visitors
- Fast Encryption One-touch WPA wireless security encryption
 Access Control Establishes a whitelist or blacklist to allow or restrict certain devices to access the internet
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android and iOS device


Security

- Parental Controls Restricts internet access time and contents for children devices
- Encryptions for Secure Network WPA-PSK and WPA2-PSK encryptions provide active protection against security threats

Specifications

Hardware

- Ethernet Ports: 4 10/100Mbps LAN Ports, 1 10/100Mbps WAN Port
- · Buttons: Power On/Off Button, Wi-Fi On/Off Button, Reset Button, WPS Button, RE Button
- Antennas: Three 9dBi Detachable Antennas
- External Power Supply: 12V/1.5A
- Dimensions (W x D x H): $9.0 \times 7.5 \times 1.9$ in. ($228 \times 190 \times 48$ mm)

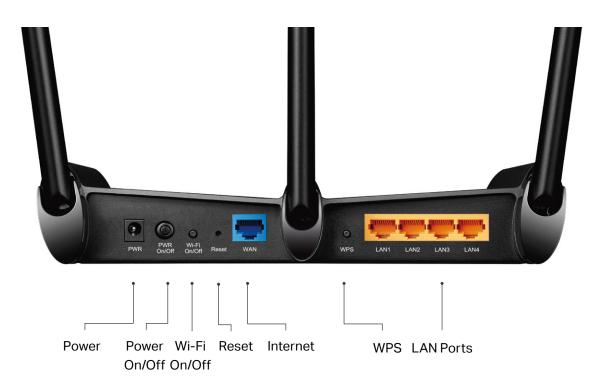

Wireless

- Frequency: 2.4GHz, 5GHz
- Transmit Power: CE: < 20dBm, FCC: <30dBm
- · Reception Sensitivity: 5GHz:
- 866M:-61dBm@10%PER
- 400M:-63dBm@10%PER 173M:-68dBm@10%PER
- 54M:-76dBm@10%PER 2.4GHz:
- 450M:-69dBm@10%PER
- 216M:-72dBm@10%PER
- 54M:-75dBm@10%PER
- 11M:-89dBm@8%PER
- Wireless Statistics
- encryptions

· Wireless Standards: IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4GHz

• Signal Rate: 867Mbps at 5GHz, 450Mbps at 2.4GHz

· Wireless Function: Enable/Disable Wireless Radio, WDS Bridge, WMM,

• Wireless Security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Specifications

Software

- · Quality of Service: WMM, Bandwidth Control
- · WAN Type: Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)/BigPond
- · Management: Access Control, Local Management, Remote Management
- DHCP: Server, DHCP Client List, Address Reservation
- Port Forwarding: Virtual Server, Port Triggering, UPnP, DMZ
- · Dynamic DNS: DynDns, NO-IP
- · Access Control: Parental Controls, Local Management Control, Host List, White List, Black List
- · Firewall Security: DoS, SPI Firewall, IP and MAC Address Binding
- · Protocols: IPv4, IPv6
- Guest Network: 2.4GHz and 5GHz guest networks

Others

- · Certification:
- CE, FCC, RoHS
- System Requirements: NetWare, UNIX or Linux
- Java-enabled browser
- Environment:
- Storage Temperature: -40°C~70°C (-40°F ~158°F)

- Package Contents **Power Supply Unit Ethernet Cable**
- Quick Installation Guide



For more information, please visit

http://www.tp-link.com/en/products/details/Archer C58HP.html

or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries. Specifications are subject to change without notice. TP-Link is a registered trademarks or registered trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved.

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, quality, and client condition.

TP-Link Technologies Co., Ltd. No.5 Keyuan Road, Nanshan, Shenzhen, 518057, PRC

Microsoft Windows 98SE/NT/2000/XP/Vista™/7/8/8.1/10, MAC OS, Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other

Operating Temperature: $0^{\circ}C \sim 40^{\circ}C$ (32°F ~104°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing

AC1350 High Power Wireless Dual Band Router Archer C58HP

www.tp-link.com

TP-Link AC1350 High Power Wireless Dual Band Router Archer C58HP