

ARM-201E

Wire ADSL2/2+ Modem/Router

The AirLive ADSL2/2+ Router enable you to access a high-speed ADSL Internet connection. The ARM-201E supports the latest ADSL2/2+ standards to provide higher performance (up to 24Mbps downstream and 3.5Mbps upstream) and longer reach from your ISP DSLAM. The ARM-201E is also backward compatible with standard ADSL. To create a home or office network, simply add a multi-port router.





IO/100
Mbps

Firewall

Setup
Wizard

Automatic Installation Program

Traditionally, setting up an ADSL modem router will require user to input parameters such as Encapsulation, VPI, VCI, Handshake protocols and more.... This procedure intimidate average users who might find the parameter values difficult to obtain. With the CD setup Wizard, you no longer have to deal with the complex ADSL parameters. Just follow the setup about the country and ISP you are using and enter the ISP's login and password. Then the router is ready to work. If your country or ISP is not on the list, just tell us, we can add them in the future release.

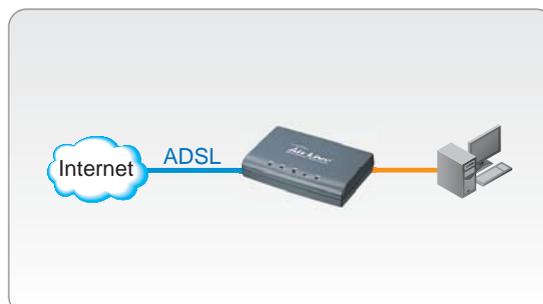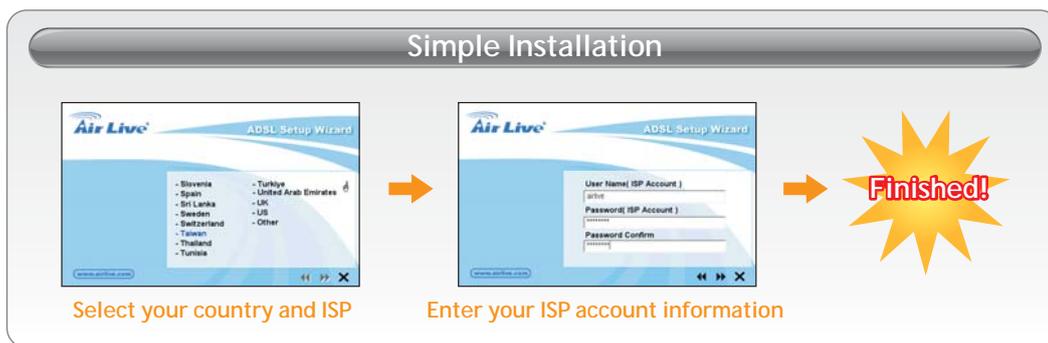


ALWAYS CONNECTED, ALWAYS ON

Unlike a dial-up Internet service, a DSL Internet connection is always on so that you do not have to wait to access the Web. The ARM-201E will automatically detect your DSL settings to quickly establish a connection to the Internet.

The ARM-201E includes a simple configuration tool and a Web-based Interface that enables you to easily modify settings to connect to a DSL Internet service. The conveniently located LED indicators let you quickly check the ARM-201E status and activity.

Surf Internet Via Ethernet

The AirLive ARM-201E is a great all in one high-speed DSL Internet access solution, whether you are a home user who requires a high-speed Internet access for faster file downloads, or a business user that relies on the Internet to conduct daily business.

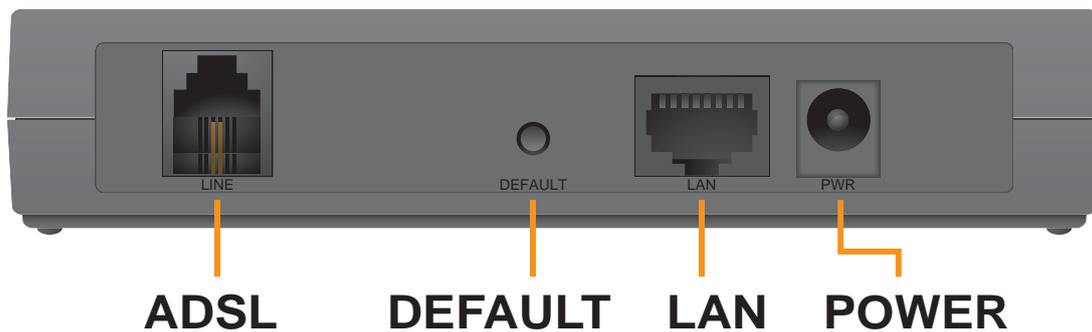

Specifications

ADSL Compliant

- ANSI T1.413 issue 2
- ITU-T G.992.1 (G.dmt)
- ITU-T G.992.2 (G.lite)
- G.994.1 (G.hs, Multimode)
- ITU-T G.992.3 (ADSL2 G.dmt.bis)
- ITU-T G.992.4 (ADSL2 G.lite.bis)
- ITU-T G.992.5 (ADSL2+, Annex A, B, L, M)
- Reach Extended ADSL (RE ADSL) and RDI OAM cells
- VPI is 0-255 and VCI is 32-65535

ATM and PPP Protocols

- Support up to 8PVCs
- ATM Forum UNI 3.1/4.0 PVC
- Multi Protocol over AAL5 (RFC1483 / 2684)
- VC and LLC Multiplexing
- PPP over Ethernet (RFC 2516)
- PPP over ATM (RFC 2364)
- Traffic Shaping (ATM QoS) UBR, CBR, VBR, VBR-rt, VBR-nrt
- OAM F4 and F5 segment end-to-end loop-back, AIS,
- TR-069, CPE WAN Management Protocol

Bridging / Routing

- Ethernet to ADSL self-learning Transparent Bridging (IEEE 802.1d)
- IP routing-RIPv2 (backward compatible with RIPv1)
- Static IP routing
- Routing (TCP/IP/UDP/ARP/ICMP)
- IP Multicast IGMP v1/v2

IP Management

- NAT (Network Address Translation)
- NAPT (Network Address and Port Translation)
- DHCP Server / Relay / Client (WAN Port)
- VPN (IPSec, PPTP, L2TP) Pass-Through
- DNS Proxy
- Dynamic DNS
- UPnP support
- Virtual Server (Port forwarding) and DMZ host

Security

- PPP over PAP (Password Authentication Protocol; RFC1334)
- PPP over CHAP (Challenge Authentication Protocol;RFC1994)
- DoS Protection
- Stateful Packet Inspection (SPI)
- Built-in NAT Firewall
- IP-based Packet filtering
- Password Protected System Management

HTTP Web-based management

- Web-based GUI Configuration / Management
- CLI (Command Line Interface) via serial interface or Telnet over Ethernet
- Telnet Remote Management
- Firmware upgrade via FTP / TFTP
- SNMP Support
- Built-in Diagnostic tool

Interface

- One RJ45 ports compliant with IEEE 802.3/802.3u, 10/100Mbps auto negotiating
- One RJ11 port for ADSL connection
- One reset button for restoration of factory default setting

LED Indicators

- ADSL, DATA, LAN, PWR

Supported OS

- Windows 98SE, ME, 2000, XP, Vista,MAC OS
Linus OS

Power Requirement

- Power Adapter: Input 110 ± 10 or 230 ± 10 VAC, Output 9VDC 0.5A

Environmental

- Operating temperature: 0°C ~ 50°C ambient
- Humidity: 5 % ~ 95 % (non-condensing)
- Storage temperature: -20°C ~ 70°C

Certification

- FCC part 15, CE, LVD

Ordering Information:

AirLive ARM-201E Wire ADSL2/2+ Modem Router