

Traveler3GM

raveler3GM is a portable Wireless 11n HSPA travel router. With its built-in HSDPA embedded module, you can connect to Internet anywhere without hard-wired effort. In additional, with its high capacity 1700mAh Li-ION battery, you don't need to worry about power supply problem anymore. In order to protect local computers, Traveler3GM supports robust SPI firewall and flexible filter rules for your requirements. You can easily change settings by web-based UI, and backup or restore configuration if required. Besides Traveler3GM can share mobile broadband for many people, you can also set it in modem mode if for personal use only. Just simply connecting Traveler3GM to your PC via USB cable, it will behave as a USB 3.75G data card to dial-up to HSDPA network.






Rechargeable Battery

Built-in with rechargeable battery, user can surf Internet in anywhere for 2 hours, as long as 3G modem can receive 3G signal.When battery runs out the power, user just needs to plug in adapter to charge the battery again.



Manufacturer
OvisLink Corp.



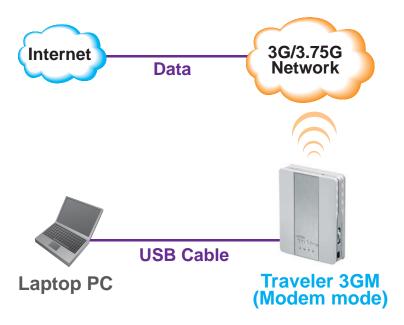

- Traveler 3GM connecting to PC via USB cable
- Traveler 3GM works as a USB HSUPA data card
- For personal use only

Specifications

Hardware & Port Configuration

Wireless WAN

- Built-in HSUPA module

SIM/USIM Card Slot

- For SIM/USIM card

WPS Button

- For WPS connection

Reset Button

- Reset router setting to factory default

LED Indication

 Power / 3G Connection Status / 3G Signal Strength & Roaming alert / WiFi

Battery

- Li-ION Battery (1700mAh)

Wireless LAN (WiFi)

Standard

- IEEE 802.11n-lite compliance

SSID

- SSID broadcast or in stealth mode

Channel

- Auto-selection, manually

Security

- WEP, WPA-PSK, WPA2-PSK

WPS

- WPS (Wi-Fi Protected Setup)

WDS

- WDS (Wireless Distribution System)

WMM

- WMM (Wi-Fi Multimedia)







Functionality

Wireless WAN

- PPP (for WCDMA/HSPA)
- PPPoE (for iBurst)
- DHCP Client (for Flash-OFDM/WM Phone)

Ethernet WAN

- PPPoE, DHCP client, Static IP, PPTP, L2TP

WAN Connection

- Auto-reconnect, dial-on-demand, manually

Voice Function

- Circuit-switched voice call over GSM/WCDMA

SMS Function

- Short Message Service

One-to-Many NAT

- Virtual server, special application, DMZ

SPI Firewall

- IP/Service filter, URL blocking, MAC control

DoS Protection

- DoS (Deny of Service) detection and protection

Routing Protocol

- Static route, dynamic route (RIP v1/v2)

Ordering Information:

AirLive Traveler3GM 11n 3G Mobile Router

Management

- SNMP, UPnP IGD, syslog

Administration

Web-based UI, remote login, backup/restore setting

3G operation

- HSUPA/HSDPA/UMTS/EDGE/GPRS/GSM
- Triple-band HSPA/UMTS 850/1900/2100 MHz
- Quad-band EDGE/GPRS/GSM 850/900/1800/1900
 MHz
- HSUPA uplink up to 5.76Mbps
- HSDPA downlink up to 7.2 Mbps
- WCDMA (UMTS) uplink data rate up to 384 kbps
- EDGE data up to 237 Kbps DL and 118Kbps UL, class 12
- GPRS data up to 85.6 Kbps DL and 42.8 Kbps UL