

MyNetFone Configuration Guide

Billion BiPAC 7401VGP R3

Contents

1. Physical Setup	2
2. GUI Login.....	2
3. Quick Start.....	2
4. WAN Setup.....	3
5. Wireless Setup.....	3
6. VoIP Setup	4
7. Completion	4

1. Physical Setup

- Connect the supplied power pack, Ethernet cable and ADSL line to the BiPAC 7401VGP R3.
- Ensure the Ethernet cable is plugged into both the network card on your PC and into one of four Ethernet ports on the VoIP device. The ADSL line is must be connected to an appropriate splitter or directly into an ADSL compatible wall socket.
- Power up the device.


2. GUI Login

The 7401VGP R3 is configured using your web browser. Navigate to **http://192.168.1.254** to access the device Web GUI.

Username: admin
Password: admin


3. Quick Start

Select '**Quick Start**' from the side menu and then choose the '**Auto**' option. Click '**Apply**'.

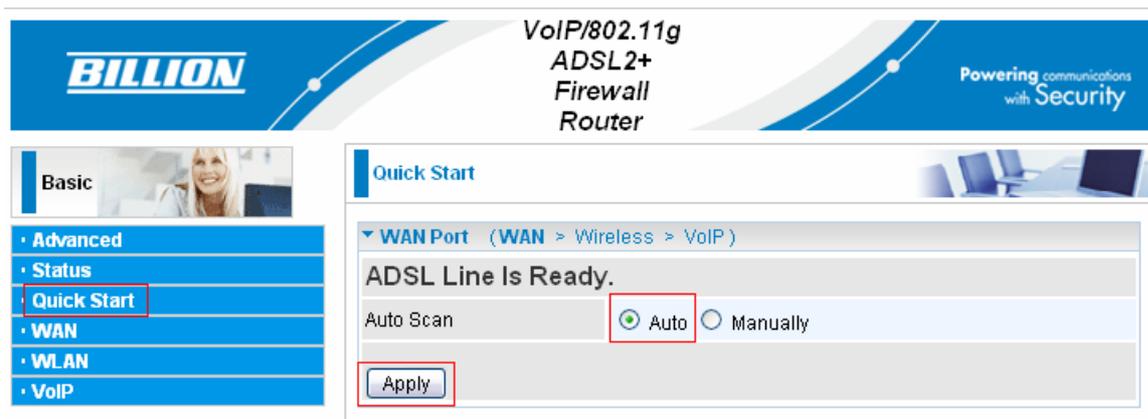

4. WAN Setup

Once the scan has completed, enter your ADSL username and password (as provided by your internet service provider). Click '**Apply**'.

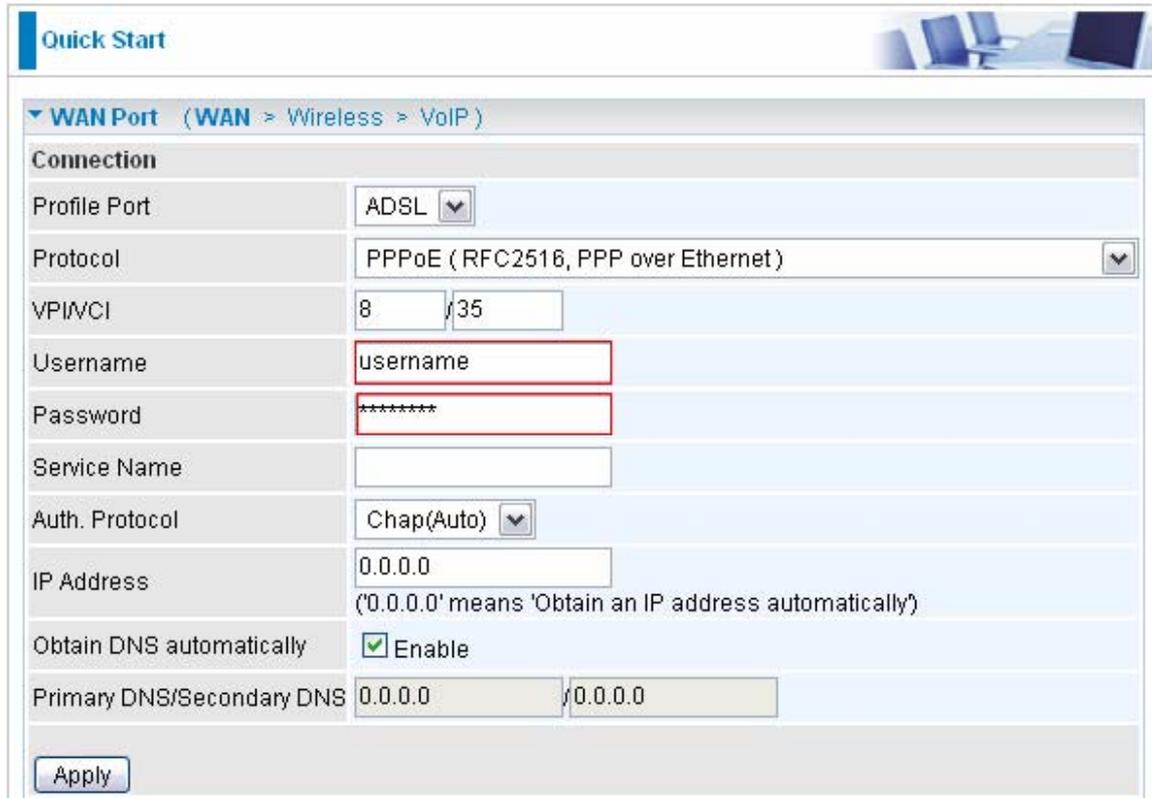

Quick Start

▼ WAN Port (WAN > Wireless > VoIP)

Connection

Profile Port: ADSL

Protocol: PPPoE (RFC2516, PPP over Ethernet)

VPI/VCI: 8 / 35

Username: username

Password: *****

Service Name:

Auth. Protocol: Chap(Auto)

IP Address: 0.0.0.0
(0.0.0.0 means 'Obtain an IP address automatically')

Obtain DNS automatically: Enable

Primary DNS/Secondary DNS: 0.0.0.0 / 0.0.0.0

Apply

5. Wireless Setup

For security reasons it is advisable to disable your Wireless LAN when not in use and to ensure security is always enabled.

If you would like **to disable** the wireless LAN, select 'Disable' under 'WLAN Service',.

Otherwise, **to create a secured wireless network**, carry out the following steps (see diagram next on page):

- Enter an **ESSID** to uniquely identify your wireless network
- Select **WPA2-PSK** as your **Security mode**
- Enter a unique **WPA Shared key**. Please keep this key in a safe place as anyone with access to this key will be able to gain access to your network
- Click '**Apply**'

▼ Wireless (WAN > Wireless > VoIP)

Parameters

WLAN Service Enable Disable

ESSID smith family

ESSID Broadcast Enable Disable

Regulation Domain Australia ▼

Channel ID Channel 1 (2.412 GHz) ▼

Security Parameters

Security Mode WPA2-PSK ▼

WPA Shared Key wirelesspassword

Group Key Renewal 600 seconds

Apply Cancel

6. VoIP Setup

In this section of the setup process, enter your MyNetFone account details as provided by your welcome email.

- Under **SIP Service Provider**, select **MyNetFone**
- Enter your provided **MyNetFone Number** into the both the **Phone Number** and **Username** fields
- Enter your supplied **MyNetFone Password** into the **Password** field
- Enter a **Display Name** of your choice
- Hit **'Apply'**

Quick Start

▼ VoIP (WAN > Wireless > VoIP)

SIP Enable Region Australia ▼

Setting for Phone Port 1

SIP Service Provider MyNetFone ▼ Phone Number 09***** Username 09*****

Password ***** Display Name John Smith

! Caution! The VoIP configuration will take effect only when you apply the changes, save configuration and restart the device.

Apply Cancel

7. Completion

Wait for a few seconds for the device to save configuration details to FLASH and reboot.

Your device has now been configured for use with MyNetFone.