



Wireless G ADSL Firewall Modem Router TEW-435BRM (D1.1R)

The Wireless G ADSL Firewall Modem Router (TEW-435BRM) delivers an all-in-one high-performance Internet and wireless network access solution.

No need to buy a separate modem and router. The TEW-435BRM offers an access point, ADSL modem, firewall, Internet router and 4-port switch in a single product. Install this device in minutes and seamlessly surf the Internet, download files, play games and talk Online.

The most advanced wireless security protocols (up to WPA2-PSK) are supported. Wi-Fi Protected Setup (WPS) allows users to securely synchronize wireless peripheral devices at the touch of a button. A firewall featuring Network Attached Translation (NAT) and Stateful Packet Inspection (SPI) protect against over 2000 unique documented Internet attacks.

FEATURES

- Wi-Fi compliant with IEEE 802.11g and IEEE 802.11b wireless devices
- Supports router+ modem or modem (modem only) mode
- Compliant with ADSL, ADSL2, ADSL2+ on G.dmt, G.lite and T1.413 multi-mode PSTN environments
- Compliant with PPPoE, PPPoA or IPoA connection types
- Support Wi-Fi Protected Setup (WPS) for easy connection
- Provides 64/128-bit wired equivalent privacy (WEP) and WPA-PSK encryption
- Supports filtering by URL, MAC address, services and date/time
- Supports DMZ, virtual servers (port forwarding) and firewall rules
- Supports RIP/Static routing and dynamic DNS service
- Supports up to 100 VPN pass-through sessions for PPTP, IPSec or L2TP connections
- NAT/NAPT, rule-based and SPI firewall protect against denial of service (DoS) attacks
- Real-time email alert and logs when attack/unauthorized Internet activity occurs
- DHCP server feature supports up to 253 users
- Supports universal plug & play (UPnP) and application layer gateways (ALGs).
- Support Internet applications such as email, gaming, multimedia and entertainment
- Supports operating systems, such as Windows 95/98/ME/NT/2000/XP/Vista, Unix, and Mac
- Easy configuration and remote management with Web browser (HTTP)
- Supports SSID enable/disable broadcasting feature
- Built-in Flash memory for firmware upgrade
- 3 Year Limited Warranty

Wireless G ADSL Firewall Modem Router

TEW-435BRM (D1.1R)

SPECIFICATIONS

Hardware	
Standards	<ul style="list-style-type: none">• IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX; IEEE 802.11g, IEEE 802.11b
Protocols	<ul style="list-style-type: none">• NAT/NAPT, PPPoE & PPPoA, HTTP, DHCP(Client/Server), TVP/IP & UDP, PAP & CHAP, RIP1, RIP2, DDNS, UPnP
Firewall	<ul style="list-style-type: none">• NAT Firewall with ALGs, Rule-Based Policy Firewall, Denial of Service (DoS) Attack Firewall; E-mail Alerts and Log
Security	<ul style="list-style-type: none">• URL Filter, Access Control, Local Password
VPN Pass Through	<ul style="list-style-type: none">• PPTP, IPSec, L2TP (up to 100 sessions)
ATM	<ul style="list-style-type: none">• TM Cell over AAL5• Support UBR/CBR/VBR• VPI Range (0-255) and VCI range (32-65535)• Support 4PVCs• Support OAM F4/F5 loopback• Payload Encapsulation<ul style="list-style-type: none">– RFC2684 (RFC 1483 / 2684), Multi-Protocol over ATM– RFC2684 (RFC 1483 / 2684), Bridge mode– RFC2225 (RFC 1577), IPoA– RFC2364, PPP over ATM (CHAP and PAP supported)– RFC2516, PPPoE (PPP over Ethernet) over ATM• Support auto-detection for VPI/CVI and multiplexing method (VC-based, LLC-based)
Management	<ul style="list-style-type: none">• Web-Based Management (HTTP)
WAN Port (ADSL line Interface)	<ul style="list-style-type: none">• Complies with G.dmt (G.992.1) Annex A• Complies with G.lite (G.992.2) and T1.413 Annex A• ITU G.992.3 Annex A ADSL2, ITU G.992.5 Annex A ADSL2+• RJ-11 connector, Line Impedance: 100 Ω
LAN Port	<ul style="list-style-type: none">• 4 x 10/100Mbps Auto-MDIX and Auto-Negotiation RJ-45 Port
Reset Button	<ul style="list-style-type: none">• Reset to Factory Default
LED	<ul style="list-style-type: none">• Power, 4x100LAN, 4x10LAN, ADSL, WLAN, Internet
Power	<ul style="list-style-type: none">• 12V DC 1A External Power Adapter
Dimensions	<ul style="list-style-type: none">• 176 x 146.8 x 33mm (6.6 x 5.7 x 1.2 inches)
Weight	<ul style="list-style-type: none">• 270g (9.5 oz)
Temperature	<ul style="list-style-type: none">• Operating: 0°~ 40°C (32°~ 104°F) ; Storage: -10°~ 70°C (-14°~ 158°F)
Humidity	<ul style="list-style-type: none">• Operating: 10 ~ 90% RH ; Storage: 5 ~ 95% RH
Emissions	<ul style="list-style-type: none">• FCC, CE


Wireless G ADSL Firewall Modem Router TEW-435BRM (D1.1R)

SPECIFICATIONS

Wireless	
Standards	<ul style="list-style-type: none">• IEEE 802.11b, IEEE 802.11g
Modulation	<ul style="list-style-type: none">• 802.11b: DSSS (PBCC, CCK, DQPSK, DBPSK)• 802.11g: OFDM
Data Rate (Auto Fallback)	<ul style="list-style-type: none">• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps• 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps
Frequency Range	<ul style="list-style-type: none">• 2.4 ~ 2.497 GHz
Channel	<ul style="list-style-type: none">• 1~14 Channel (Universal Domain Selection)
Antenna	<ul style="list-style-type: none">• 1 x 2dBi External Detachable Dipole Antenna with Reverse SMA Connector
Security	<ul style="list-style-type: none">• 64/128-Bit WEP (Hex or Passphrase), WPA-PSK (TKIP)
Output Power	<ul style="list-style-type: none">• 802.11b: 18dbm• 802.11g: 12 ~ 14dbm
Receiving Sensitivity	<ul style="list-style-type: none">• 11Mbps 10 – 5 BER @ -82 dBm (typical)• 54Mbps 10 – 5 BER @ -72 dBm (typical)

NETWORKING SOLUTIONS

54Mbps Wireless G ADSL Firewall Modem Router (TEW-435BRM)

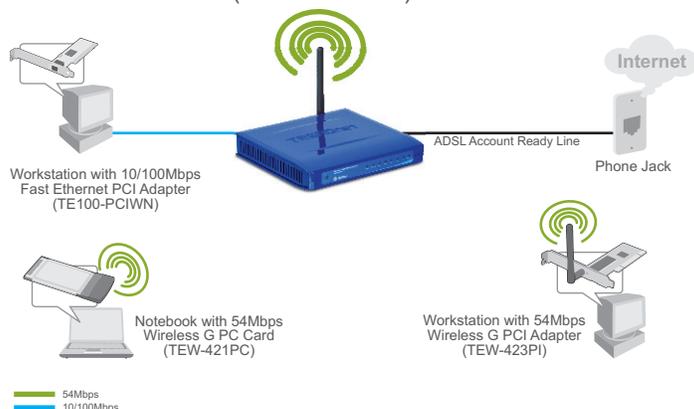

PACKAGE CONTENTS

- TEW-435BRM
- Multi-language quick installation guide
- CD-ROM (User's Guide)
- 1 x RJ-45 1.5m (5ft.) Ethe Cable
- 1 x RJ11 Telephone Cable
- Power Adapter (12V DC 1A)

RELATED PRODUCTS

TEW-421PC	54Mbps 802.11g Wireless PC Card
TEW-423PI	54Mbps 802.11g Wireless PCI Adapter
TW100-BRM504	4-Port ADSL Modem Firewall Router

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA
Tel: 1-310-961-5500
Fax: 1-310-961-5511
Web: www.trendnet.com
Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

