


## Quick Start




AT&T Unite

## Get to Know Your Mobile Hotspot

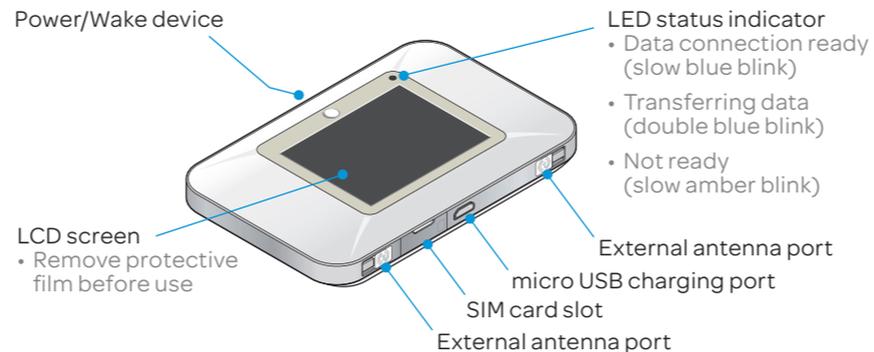

## Set Up Your Mobile Hotspot

① Insert the battery.

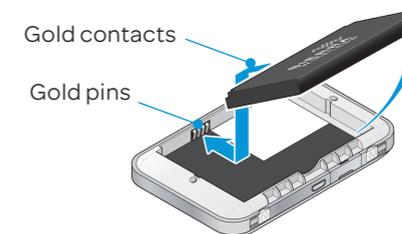

② Install the back cover.

The battery is pre-charged. When you need to recharge it, use the USB cable to attach the mobile hotspot to:

- A wall socket, using the wall charger (fastest option)
- The USB port on your laptop



Note: The mobile hotspot comes with a pre-installed SIM card.

## Find More Information

### On your Mobile Hotspot

- On the touchscreen, tap **Settings** > **Support** > **View Tutorial**.

### On the Web

- Visit the interactive web tutorial available at [att.com/Tutorials](http://att.com/Tutorials). Select manufacturer: **AT&T**; model: **Unite**.
- Additional support is available online, including device applications, troubleshooting and user forums at [att.com/DeviceSupport](http://att.com/DeviceSupport).


### On the phone

- Call AT&T Customer Care at 1-800-331-0500 for assistance with your AT&T service. When prompted, enter the 10-digit wireless phone number associated with your DataConnect service. The wireless phone number is found on the mobile hotspot at **Settings** > **About**.

Sierra Wireless and the Sierra Wireless logo are trademarks of Sierra Wireless. LTE is a trademark of ETSI. © 2012 AT&T Intellectual Property. All rights reserved. AT&T, the AT&T logo and all of the AT&T marks contained herein are trademarks of AT&T Intellectual Property and/or AT&T affiliated companies. All other marks contained herein are the property of their respective owners.

Printed in China 2400243, Rev. 1

## Touchscreen

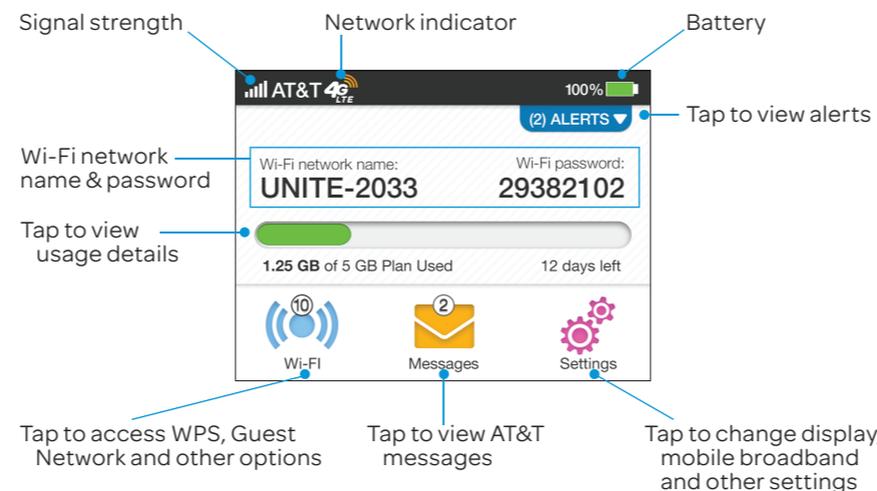

## Connect to the Internet

### Turn on your Mobile Hotspot

- Press and hold the power button for 2 seconds.  
Note: The touchscreen displays the hotspot's Wi-Fi network name and password.

### On your laptop or other wireless devices

- Open your Wi-Fi/network connection manager.
- Find your mobile hotspot's Wi-Fi network name (UNITE-xxxx) and connect.
- Enter your mobile hotspot's Wi-Fi password.
- Launch your browser.

Note: The touchscreen goes dark to save power. Press and release the power button to wake the screen, then tap the unlock icon to show the screen details.



## Basic Settings

Change basic settings on the touchscreen, including:



- Adjust screen timeout (Screen)
- Hide Wi-Fi network name and password (Screen)
- Update software (Software Update)
- Find hotspot's wireless number (About)




- Set Wi-Fi range (Options)
- Enable Guest Wi-Fi (Guest Wi-Fi)
- View connected devices (Devices)

## Advanced Settings – In your Browser

Change advanced settings such as Wi-Fi network name and password, the maximum number of devices, and more, via the Unite Manager web interface.

- ① Connect a Wi-Fi device to your mobile hotspot.
- ② Go to <http://attunite> in the connected device's browser.
- ③ Login is **attadmin**.

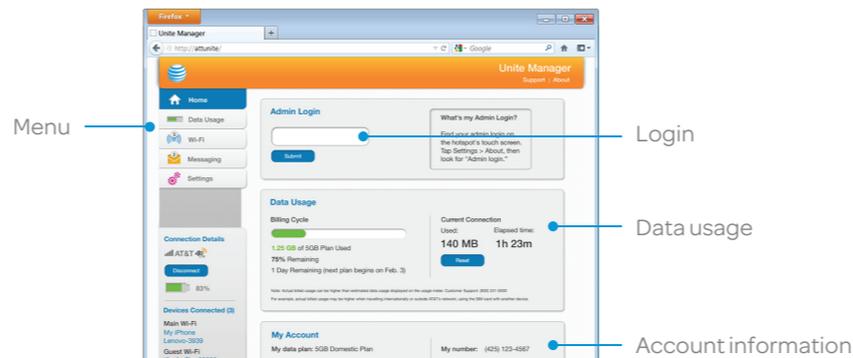

## Advanced Connection Options

### Guest Wi-Fi

You can give guests one-time access to your mobile hotspot by setting up a Guest Wi-Fi network:

- ① On the touchscreen, tap **Wi-Fi > Guest Wi-Fi**. The current (default) guest Wi-Fi network name and password appear.
- ② Select **On**.



Guest users can now use this Wi-Fi network name and password in their device's Wi-Fi/network connection manager.

**Note:** The Guest Wi-Fi network is turned off when the hotspot is restarted.

### Block Device Access

To prevent a device from reconnecting to the mobile hotspot, add it to the hotspot's blocked list:

- ① On the touchscreen, tap **Wi-Fi > Devices**.
- ② Select the device you want to block (there could be more than one page of connected devices).
- ③ Follow the displayed instructions to block the device.

## Advanced Connection Options (continued)

### Connect WPS devices

Use Wi-Fi Protected Setup (WPS) to connect WPS-enabled devices without entering the Wi-Fi password.

- ① On the touchscreen, tap **Wi-Fi > WPS**.
- ② Select pairing with your Main or Guest Wi-Fi network.
- ③ Press the WPS button on a device you want to connect to your mobile hotspot.

## Wi-Fi Passwords

### Hide password

To hide the password on the touchscreen:

- ① On the touchscreen, tap **Settings > Screen**.
- ② Tap **Wi-Fi Info on Homescreen**.
- ③ Select **Hide**.

### Change Wi-Fi network name and password

- ① On your laptop (or other Wi-Fi device), go to <http://attunite> in the browser.
- ② Log in as administrator. Default login is **attadmin**
- ③ Select **Wi-Fi** in the left-side menu.
- ④ In the Wi-Fi Info section, click **Edit** for the Wi-Fi details you want to change.
- ⑤ In the Credentials section, type your new Wi-Fi network name and password.
- ⑥ Click **Save**.

**Note:** If you change the network name or password, you may need to reconnect your other devices to the Unite.

## Network Indicators

Your 4G LTE wireless device will display one of the following network indicators to let you know which of AT&T's wireless networks you are connected to.

- Connected to AT&T's 4G LTE network.
- Connected to AT&T's HSPA+ network.
- Connected to AT&T's EDGE/2G network.



Limited 4G LTE availability in select markets. 4G speeds delivered by LTE, or HSPA+ with enhanced backhaul, where available. Compatible data plan required. LTE is a trademark of ETSI. Learn more at [att.com/network](http://att.com/network).

A network indicator does not necessarily mean that you will experience any particular upload or download data speeds. Actual upload and download data speeds depend upon a variety of factors, including the device, network utilization, file characteristics, terrain, etc. Learn more at [wireless.att.com/learn/articlesresources/wireless-terms.jsp](http://wireless.att.com/learn/articlesresources/wireless-terms.jsp) Your AT&T Wireless Customer Agreement, Section 3.2 Where and How Does AT&T Service Work?