

## Six-in-one Wireless and Wired VPN Solution

#### VPN, Wireless Access Point, Firewall, Router, Switch and ADSL2+ modem

This comprehensive and affordable solution offers wired, wireless connectivity with businessclass protection for small office and remote/branch office users. It combines six functions in a single, compact package – Stateful Packet Inspection (SPI) firewall, 802.11g wireless access point, IPSec Virtual Private Network (VPN), NAT router, an eight port 10/100 fast ethernet switch and built-in ADSL2+ modem support.


Easy and relliable, the DGFV338 delivers both 10 and 100 Mbps connections for wired devices, plus wireless support at 2.4 Ghz frequency at 54 Mbps radio transmission with up to 108 Mbps in 802.11g (region specific).

More than just a simple NAT router, the ProSafe DGFV338 SPI firewall provides businessclass protection, blocking unwanted users from accessing the network. Support for Wi-Fi Protected Access 2 Enterprise (WPA2) shields wireless communication with the highest available level of industry-standard encryption and authentication. Comprehensive controls block or filter unwanted addresses, services, protocols, and URLs, fortifying your network. Up to fifty simultaneous IPSec VPN connections protect links between business locations, encrypting all traffic as it traverses the Internet.

# and Remote Offices

Ideal Solution for Telecommuters The DGFV338 is easy to set up. It delivers all the advantages of centralized administration for remote offices, teleworkers and small businesses, including dynamic DNS capabilities. Providing support for ADSL2+, the DGFV338 also supports an Ethernet WAN port for failover on non-ADSL connections.

ProSafe DGFV338 is the all-in-one solution for all your small to mid-sized business needs.

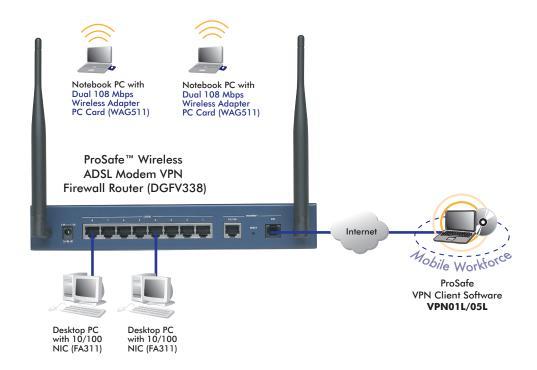





#### **Technical Specifications**

#### Wireless

- Standards: IEEE, 802.11g, 54 Mbps,
  Super G technology up to 108 Mbps
- Antenna: (2) 5dBi, detachable

#### • Physical Interfaces

- LAN ports: Eight (8) 10/100Mbps autosensing, Auto Uplink™ RJ-45 ports
- WAN port: 10/100BASE-T Ethernet RJ-45
- ADSL WAN port: One (1) RJ-11 supporting annex A or Annex B (Region Specific)

#### Security

- SPI firewall: Stateful packet inspection (SPI) Intrusion Detection System (IDS) including logging, reporting and email alerts, address, service and protocol, Web URL keyword filtering, port/ service blocking. Advanced features include block Java/URL/ActiveX based on extension, FTP/SMTP/RPC program filtering
- VPN Functionality: Fifty (50) dedicated VPN tunnels, Manual Key and Internet Key Exchange Security Association (IKE SA) assignment with pre-shared key and RSA/DSA signatures, key life and IKE lifetime settings, perfect forward secrecy (Diffie-Hellman groups 1 and 2 and Oakley support), operating modes (Main, Aggressive, Quick), fully qualified domain name (FQDN) support for dynamic IP address VPN connections
- IPSec Support: IPSec-based 56-bit (DES), 168-bit (3DES), or 256-bit (AES) encryption algorithm, MD5 or SHA-1 hashing algorithm, AH/AH-ESP support, PKI features with X.509 v.3 certificate support, remote access VPN (client-to-site), site-to-site VPN, IPSec NAT traversal (VPN pass-through)
- Mode of operation: One-to-one/ many-to-one multi-network address translation (NAT), classical routing, unrestricted users per port
- IP address assignment: Static IP address assignment, DHCP replay, DHCP address reservation
- Wireless Security: Wi-Fi Protected Access 2 Enterprise (WPA2), 802.1x

#### • Performance Features:

Throughput: Up to 50 Mbps
 WAN-to-LAN, up to 20 Mbps for
 3DES throughput

#### Management Features

- Administration interface: SNMP (v2c) support, Web graphic user interface, Secure Sockets Layer (SSL) remote management, user name and password protected; Secure Remote Management support authenticated through IP address or IP address range and password; configuration changes/ upgrades through web GUI
- Configuration and upgrades: Upload and download configuration settings, firmware upgradeable flash memory
- Secure HTTPS remote management support: Authenticated through IP address or IP range and password

#### Functions

 VPN Wizard to simplify configuration of the VPN, port range forwarding, port triggering, exposed host (DMZ), enable/disable WAN ping, DNS proxy, MAC address cloning/spoofing, Network Time Protocol support, keyword content filtering, email alerts, DHCP server (info and display table), WAN DHCP client, diagnostic tools (ping, trace route, other), port/service/ MAC address blocking

## Protocol Support

- Network: IP routing, TCP/IP, UDP, ICMP, PPPoE
- IP Addressing: DHCP (client and server)
- Routing: Static, RIPv1, RIPv2
- VPN/Security: IPSec (ESP, AH), MD5, SHA-1, DES, 3DES, IKE, PKI, AES

#### User Support

LAN: Up to 253 usersWLAN: Up to 20 users

#### Hardware

- Processor: 266 Mhz 32-bit RISC

- ADSL Processor: T. I. AR7

- Memory: 8 MB flash, 32 MB SDRAM

Power requirements: 100-240V AC, 50-60Hz  Power adapter: 12V DC, 1.2A Plug is localized to country of sale

 Dimensions: 280 x 245 x 106 mm (11.02 x 9.65 x 4.17 in)

- Weight: 2.19 kg/4.83 lb

- MTBF: 35141.413 hours = 4.012 years

- Acoustic noise: 0 dB

#### Environmental Specifications

- Operating temperature: 0° to 40°C (32° to 104°F)
- Operating humidity: 90% maximum relative humidity, non-condensing

#### System Requirements

- Cable, DSL, and Internet service
- Ethernet connectivity from broadband modem
- Wired or wireless capability for each PC
- Network software (e.g. Windows®)
- Internet Explorer 6.0 or higher,
  Netscape Navigator 7.2 or higher,
  Mozilla Firefox® 1.5 or higher

## Warranty

– NETGEAR Lifetime Warranty†

## ProSupport™ Service Packs Available

#### • On Call 24 x 7

- PMB0331-100 (US)
- PMB0331 (non-US)

#### Xpress HW

- PRR0331

#### **Package Contents**

- ProSafe Wireless ADSL Modem VPN Firewall Router (DGFV338)
- Ethernet cable
- Two (2) detachable 5 dBi antenna
- Installation guide
- Resource CD with single user ProSafe VPN Client Software license
- Warranty/support information card

### **Ordering Information**

- Europe General: DGFV338 100ISS
- United Kingdom: DGFV338 100UKS
- Germany: DGFV338 100GRS
- Australia: DGFV338 100AUS

## **NETGEAR®**

4500 Great America Parkway Santa Clara, CA 95054 USA 1-888-NETGEAR (638-4327) E-mail: info@NETGEAR.com www.NETGEAR.com ©2007 NETGEAR, Inc., the NETGEAR logo, Connect with Innovation, Everybody's connecting, FrontView, the Gear Guy logo, IntelliFi, ProSafe, RangeMax, ReadyNAS, RAIDar, RAIDiator, X-RAID, and Smart Wizard are trademarks of NETGEAR, Inc. and/or its subsidiaries in the United States and/or other countries. Microsoft and Windows are trademarks of Microsoft Corporation in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice. All rights reserved.

<sup>\*</sup>Free basic installation support provided for 90 days from date of purchase. Advanced product features and configurations are not included in free basic installation support; optional premium support available.

<sup>†</sup>Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 3 years.