



WAC104

Features

The NETGEAR® Dual Band 802.11ac Wireless Access Point (AP) delivers high performance for Small Office and Home Office (SOHO) deployments and supports dual band concurrent operation at 2.4GHz and 5GHz with combined throughput of 1.2 Gbps (300Mbps at 2.4GHz and 867Mbps at 5GHz). The WAC104 Wireless 802.11ac Access Point provides standalone configuration with easy setup for a reliable, high-performance, and affordable wireless solution.

Easy to Configure

- Simple setup in minutes with intuitive Graphical User Interface (GUI)
- Comprehensive monitoring with web-based access

High performance and superior coverage

- Dual band concurrent operation between 2.4GHz and 5GHz frequency ranges
- Maximize coverage for optimal deployment for SOHO


Comprehensive security

- Supports wireless security features (WPA, WPA2)
- MAC based Access Control List to protect against intruders

Interoperate with both new and legacy clients

- Support latest 802.11ac wireless clients to achieve maximum speed
- Backward compatible to allow legacy devices to connect at their fastest speed

Sample Deployment Use Cases

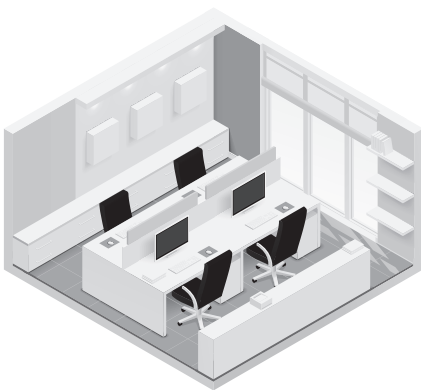

Small Offices




Dental Offices



Small Hotels



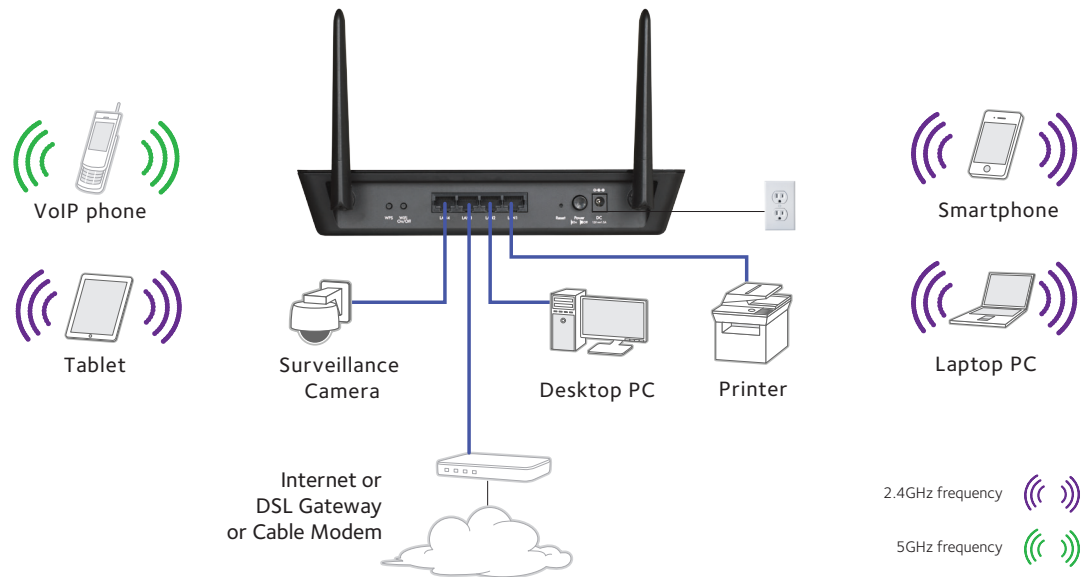

Technical Specifications

Physical Characteristics

Power

- Country-specific plug: 12V/1.5A (18W)
- 1.5 Amp power adapter
- Power consumption: 8.1W (maximum)

Physical Dimensions

- Dimensions (L x W x H): 9.43 x 7.14 x 1.59in (239.65 x 181.45 x 40.6mm)

Weight

- Weight: 0.84lb (385g)

Mounting

- Desktop standable
- Wall mountable

Interfaces and Indicators

Physical Interfaces

- Four (4) 10/100/1000BASE-T Ethernet (RJ-45) port with Auto Uplink™ (Auto MDI-X)

LEDs

- Power, WPS, WiFi, LAN Activity

Default Reset

Environmental Conditions

Operating Temperature

- 32° to 104°F (0° to 40°C)

Storage Temperature

- -4° to 158°F (-20° to 70°C)

Operating Relative Humidity

- 10-90%

Storage Humidity

- 5-95%

MTBF

- @ 25°C > 285,000 hours
- @ 50°C > 100,000 hours

RF Characteristics

Standards

- IEEE 802.11ac specification
- IEEE 802.11n 2.0 specification
- IEEE 802.11g
- IEEE 802.11b
- IEEE 802.11a

Frequency Band

- 2.4GHz and 5GHz concurrent operation

Maximum Theoretical Throughput

- 300Mbps (2.4GHz)
- 867Mbps (5GHz)

Maximum Number of Clients

- 128

Network Management

Deployment options

- Standalone
- Web UI

Access Point

- Antenna: 3dBi (external)

Advanced Wireless

- WDS Point-to-point wireless bridge mode
- WDS Point-to-multipoint wireless bridge mode

Security

- Wired Equivalent Privacy (WEP) Encryption
- WiFi Protected Access Pre-shared Key (WPA-PSK, WPA2-PSK)
- MAC Address filtering
- 1 BSSID


MAC ACL

VPN Pass-through

802.11e WMM

- (Wireless multimedia mode) for QoS

Simultaneous Bridge/Client Association

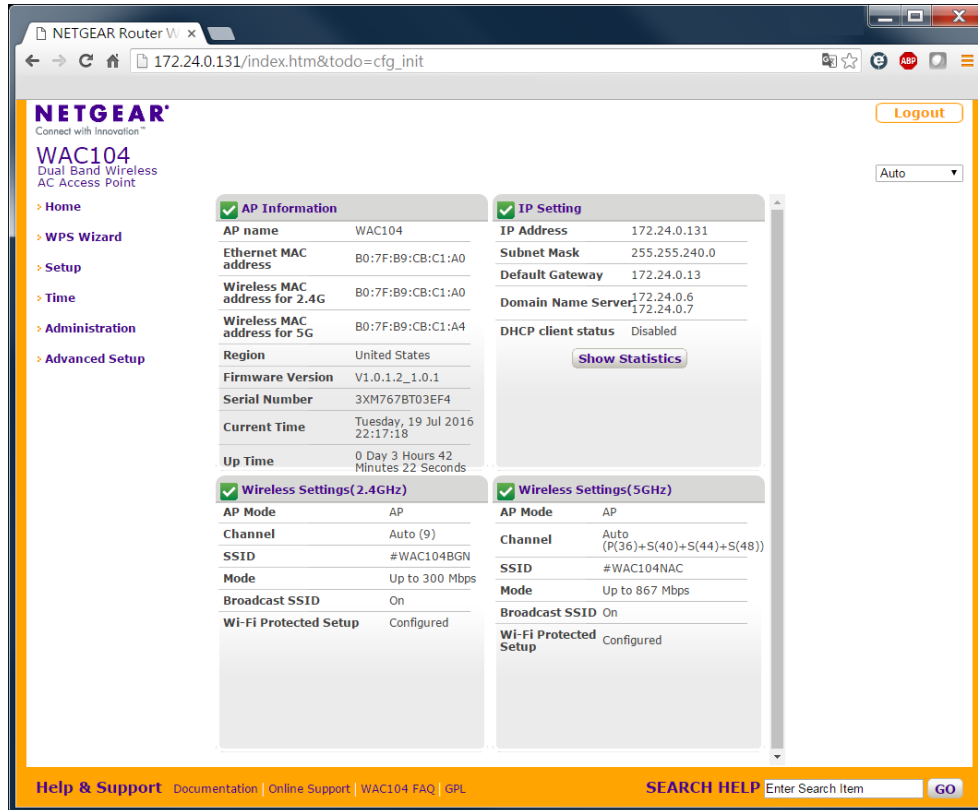

Simple Configuration User Interface

Technical Specifications

Package Contents

- 802.11ac Wireless AP (WAC104)
- Ethernet cable
- Installation guide
- Power adapter, localized to country of sale
- Warranty/support information card

Warranty and Support

Warranty

- NETGEAR 3-year Warranty* (including the power adapter)

Safety Certification

- CE (EN60950)

Optional Support

- PMB0351: 5 years OnCall 24x7
- PMB0331: 3 years OnCall 24x7
- PMB0311: 1 year OnCall 24x7

Product Ordering Information

- WAC104-100AUS
- WAC104-100NAS
- WAC104-100PES
- WAC104-100PRS
- WAC104-100UKS
- WAC104-100INS

* 3-Year Warranty cover hardware, fans, and internal power supplies - not external power supplies or software. Warranty is only valid for the original purchaser, and modifications to product may void the warranty. See <http://www.netgear.com/about/warranty/> for details. Basic phone support for 90 days from purchase when purchased from a NETGEAR authorized reseller.

NETGEAR, the NETGEAR Logo, and ProSAFE are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved. © 2016 NETGEAR, Inc.