

WNR1012

4G

Wireless-N MIMO AP/Router

**300
mbps**



4G
Ready

3G
Auto
Failover

NAS
(FTP)
NAS Storage

**Advanced
Security**

**Mobile
Hotspot**

Features

- Providing All-in-1 design for Internet sharing. It integrates the Wireless Access Point, 3G, 4G and network-attached storage (NAS)
- Auto Failover for redundancy internet backup
- Support the IEEE 802.11b/g/n standard, high speed data rate up to 300Mbps
- Support HSDPA/HSUPA/HSPA+/HSPA+/LTE or CDMA/EVDO USB Modem
- Easily configure Wireless Security at a push of WPS button
- High security with build-in Security: WEP 64/128, WPAPSK, WPA2PSK, WPA, WPA2, 802.1x and 802.11i
- Support Router, WDS (Bridge + Repeater)
- Wireless Quality of Service (QoS) - 802.11e, WMM
- Easy configuration for home user setup

Register Online for your Product Warranty @ www.prolink2u.com

Manufactured by Fida International (S) Pte Ltd. Email : sales@fida.com Tel : +65 6357 0668.

PROLINK® is a trademark of Fida International (S) Pte Ltd and is manufactured under its authority. All other brands, products, services, logos and company names mentioned herein are trademarks and/or registered trademarks of their respective owners. Images shown are for illustrative purposes only. All specifications, designs and contents are subject to change without prior notice. © Copyright 2012. PROLINK® All rights reserved.



WNR1012


4G

Wireless-N MIMO AP/Router

Specifications

Standard	IEEE 802.11b/g/n
Wireless LAN	2T2R mode
Security	WEP 64, 128/WPA, WPA2
Interface	RJ45 *5 ports (1 WAN / 4 LAN), Reset button, WPS button, SMA connectors, USB
Frequency Range	2.400 ~ 2.4835GHz (subject to local regulations)
Antenna Connector	Antenna Connector Dipole (2dbi) x2
Number of Selectable Channels	USA, Canada (FCC): 11 channels (2.412GHz ~ 2.462GHz) Europe (CE): 13 channels (2.412GHz ~ 2.4835GHz) Japan (TELECOM): 14 channels (2.412GHz ~ 2.4835GHz)
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: Up to 300Mbps
Output Power	802.11b: 11Mbps 17dBm 802.11g: 54Mbps 14dBm 802.11n: 135Mbps 14dBm
Receiver Sensitivity	802.11b: 11Mbps 8% P E R ~ -89dBm 802.11g: 54Mbps 10% P E R ~ -72dBm 802.11n: 135Mbps 10% P E R ~ -65dBm
Range	Indoors: up to 100 meters ; Outdoors: up to 300 meters
Power Input Range	100V ~ 240V
Physical Specifications	Dimension: 155(L) x 106(W) x 27(H) mm
Package Contents	WNR1012 4G Wireless-N MIMO AP/Router ; 2 x Antennas ; Power Adapter ; Ethernet Cable ; Quick Installation Guide ; User Guide CD

How does it work?

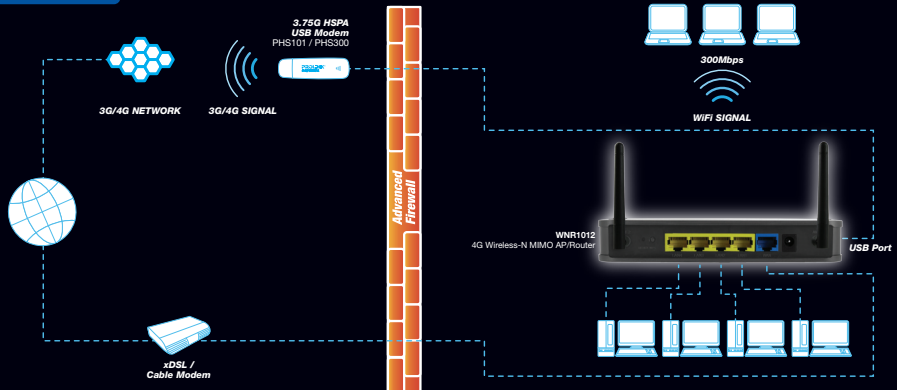

Register Online for your Product Warranty @ www.prolink2u.com

Manufactured by Fida International (S) Pte Ltd. Email : sales@fida.com Tel : +65 6357 0668.

PROLINK® is a trademark of Fida International (S) Pte Ltd and is manufactured under its authority. All other brands, products, services, logos and company names mentioned herein are trademarks and/or registered trademarks of their respective owners. Images shown are for illustrative purposes only. All specifications, designs and contents are subject to change without prior notice. © Copyright 2012. PROLINK® All rights reserved.

