

AC2300 Wireless MU-MIMO **Gigabit Router**

Best for Simultaneous 4K Streaming and Gaming







1625Mbps + 600Mbps



Dual Band Wi-Fi



Highlights

MU-MIMO for 3× Faster Connections


MU-MIMO technology serves up to three devices at once, reducing wait time, increasing Wi-Fi throughput for every device, and making each stream more efficient.

Range Boost for Better Whole Coverage


Range Boost greatly improves the routers ability to detect devices that are further away or low-powered, giving your network even greater coverage.



Traditional Router Sends data to one device at a time MU-MIMO Router Simultaneously sends data to multiple devices

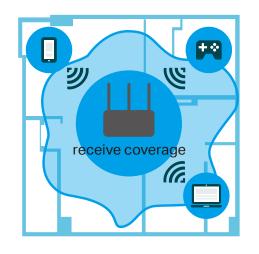

without Range Boost Can not receive weak signals

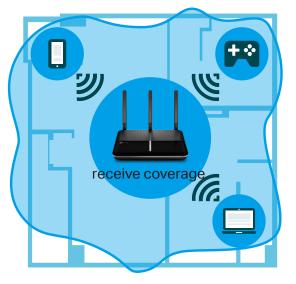

with Range Boost Greatly expands receive coverage


Highlights

NitroQAM[™] Powered by Broadcom


NitroQAM[™] (1024QAM) boosts speeds on all Wi-Fi bands by 25% to significantly improve performance.

1.8GHz Dual-Core CPU


1.8GHz Dual-Core CPU coordinates every process to ensure fast transmission speed, supporting more devices and high-speed applications simultaneously.

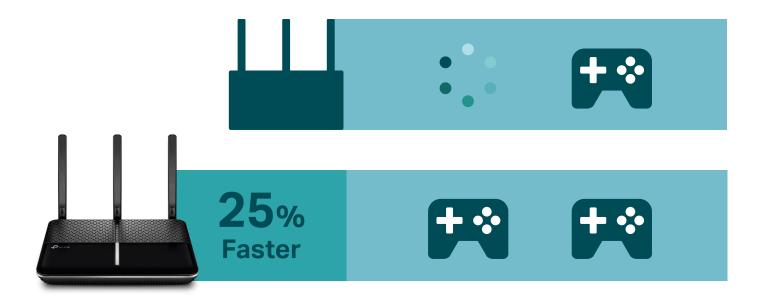

1.8GHz Dual-Core CPU

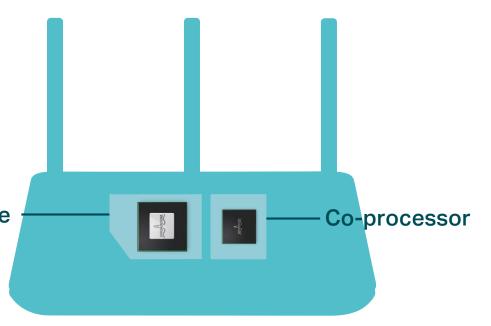


Features

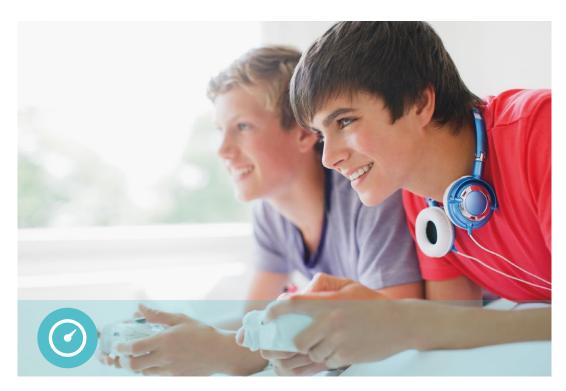

Speed

- Ultimate Wireless Speed Combined wireless speeds up to 600 Mbps (over 2.4GHz) and 1625 Mbps (over 5GHz)
- NitroQAM[™] Technology Use NitroQAM[™] Technology modulation scheme for higher data throughput, boosting wireless speeds up to 25%
- MU-MIMO Technology Simultaneously exchanges data with several devices, achieving speeds which are 3x faster than standard AC routers
- Support 802.11 ac Provides a data transfer rate 3 times faster than 802.11n for each stream
- Dual-core CPU 1.8GHz dual-core CPU and 2 co-processor make multi-tasking easy and boost data transfer rate

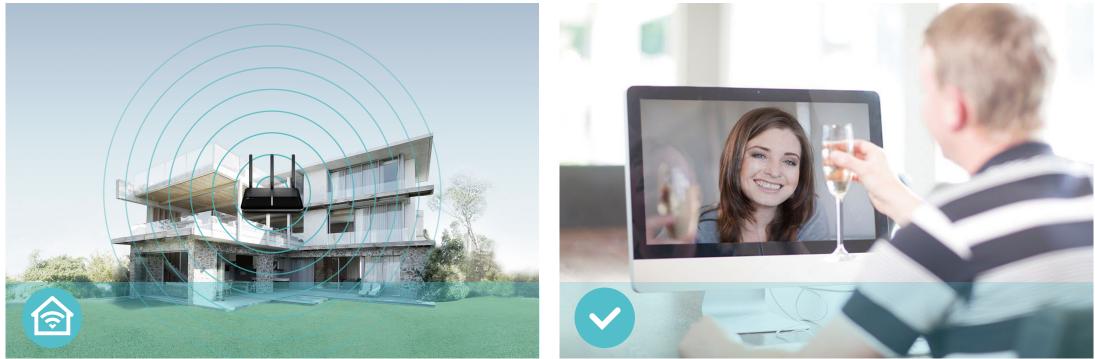


Wi-Fi Range

- Ultimate Range Wi-Fi 3 dual band high-performance antennas with a high-powered amplifier ensure the widespread Wi-Fi coverage and a stable connection
 Simultaneous Dual Band – Separate Wi-Fi bands enable more devices to connect to your network without a drop in performance
- Wi-Fi with Beamforming Beamforming technology locates the connected devices and further improves the Archer C2300's range and the signal strength to each mobile device, delivering a more reliable and efficient wireless connection
 Easy Bandwidth Management – Advanced QoS makes it easier for you to manage the bandwidth of connected devices


Reliability

Features

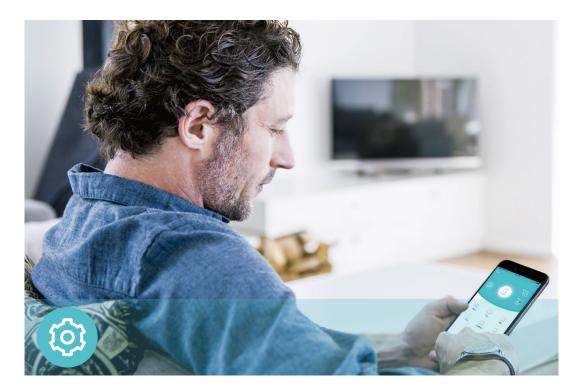

Ease of Use

- Intuitive Web UI Ensures guick and simple Installation without hassle
- Fast Encryption One-touch WPA wireless security encryption with the WPS button
- · Wi-Fi On/Off Turn on/off wireless radio as needed using the Wi-Fi On/Off button
- Power On/Off Conveniently power on or off your router as required
- Hassle-free Management with Tether App Network management is made easy with the TP-Link Tether App, available on any Android and iOS device
- · Online Upgrade Keeps informed of the latest firmware updates, ensuring your router stays at its best

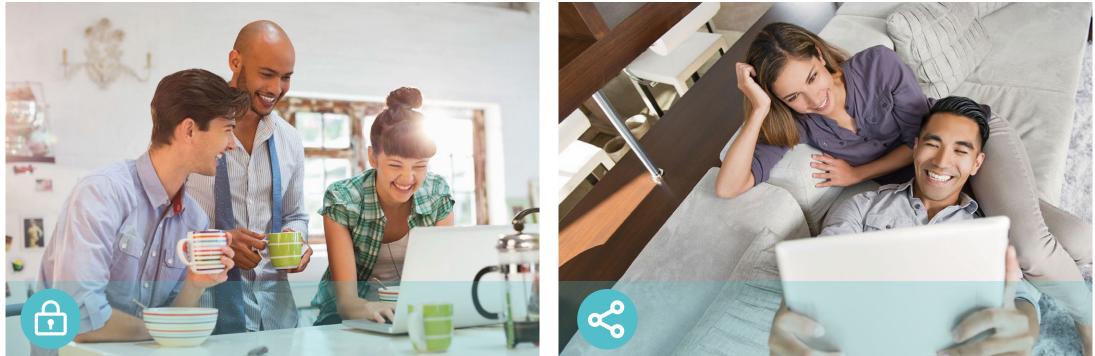

Security


- Dual USB Ports for Fast Sharing With one ultra-fast USB 3.0 • Guest Network – Keep your main network secure by creating a separate network for friends and visitors port and one USB 2.0 port, you can access and share a printer as well as your files and media locally. Through the router's FTP · Access Control – Establish a whitelist or blacklist to allow or server, you can also access your files and media from network restrict certain devices to access the internet devices remotely
- Parental Controls Restrict internet access time and contents • 10x Faster Transfer Speed – The USB 3.0 port provides up to for children devices 10x faster USB hard drive access than previous generation USB 2.0 connections
- · VPN Server PPTP VPN and OpenVPN are supported, making it easy to set up a secure connection between your private • Built-in Print Server – Allows wireless printing from multiple network and the internet computers (works in conjunction with a USB printer)
- Encryptions for Secure Network WPA-PSK and WPA2-PSK Built-in Media Server – Allows you to play music, watch videos encryptions provide active protection against security threats and view photos from any device on your network

Easy Sharing

Specifications

Hardware

- Ethernet Ports: 4 10/100/1000Mbps LAN Ports, 1 10/100/1000Mbps WAN Port
- · USB Ports: 1 USB 3.0 Port, 1 USB 2.0 Port
- Buttons: Wireless On/Off Button, Power On/Off Button, Reset Button, WPS Button
- Antennas: 3 Dual Band Antennas
- External Power Supply: 12VDC/3.3A (US version), 12VDC/2A (EU version)
- Dimensions (W x D x H): 215.8 X 163.8 X 38.5mm

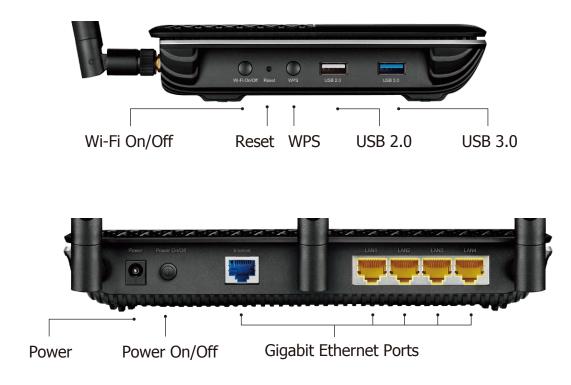

Wireless

- Frequency: 2.4GHz and 5GHz
- Transmit Power:
- CE: <13.5dBm(2.4GHz), <16.5dBm(5GHz)
- · Reception Sensitivity: 5GHz:

- 54M: -76dBm, 6M: -95dBm
- 2.4GHz:

- · Wireless Function: Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics
- Filter

• Wireless Standards: IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4GHz • Signal Rate: 1625Mbps at 5GHz, 600Mbps at 2.4GHz

FCC: <25dBm(2.4GHz), <24dBm(5GHz)

11ac80M MCS11: -58dBm, 11ac80M MCS0: -88dBm 11ac40M MCS11: -61dBm, 11ac40M MCS0: -91dBm 11ac20M MCS11: -63dBm, 11ac20M MCS0: -95dBm

11n40M MCS9: -63dBm, 11n40M MCS0: -89dBm 11n20M MCS8: -67dBm, 11n20M MCS0: -92dBm 54M: -75dBm, 11M : -90dBm, 6M: -93dBm, 1M: -98dBm

· Wireless Security: Enable/Disable SSID Broadcast, 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA-PSK2 encryptions, QSS, Wireless MAC

Specifications

Software

- · Quality of Service: WMM, Bandwidth Control
- · WAN Type: Dynamic IP, Static IP, PPPoE, PPTP(Dual Access), L2TP(Dual Access), Bigpond
- · Management: Access Control, Local Management, Remote Management
- DHCP: Server, DHCP Client List, Address Reservation
- Port Forwarding: Virtual Server, Port Triggering, UPnP, DMZ
- · Dynamic DNS: DynDns, NO-IP, TP-Link
- Access Control: Parental Control, Local Management Control, Blacklist, Whitelist
- Firewall Security: DoS, SPI Firewall, IP and MAC Address Binding
- · Protocols: IPv4, IPv6
- · USB Sharing: Supports Samba(Storage), FTP Server, Media Server, Printer Server
- · Guest Network: 2.4GHz guest network x 1, 5GHz guest network x 1

Others

- · Certification:
- CE, FCC, RoHS
- System Requirements: NetWare, UNIX or Linux
- Java-enabled browser
- Cable or DSL Modem
- Environment:

- Package Contents
- Power Adapter
- **RJ45 Ethernet Cable**
- Quick Installation Guide



For more information, please visit

http://www.tp-link.com/en/products/details/Archer-C2300.html

or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries.

*Three or more 1×1 MU-MIMO-enabled client devices must be connected to achieve up to three (3) times faster performance. TP-Link Technologies Co., Ltd.

Building 24 (floors 1, 3, 4, 5) and 28 (floors 1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China www.tp-link.com

Microsoft Windows 98SE/NT/2000/XP/Vista™/7/8/8.1/10, MAC OS,

Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0, or other

Subscription with an internet service provider (for internet access)

Operating Temperature: $0^{\circ}C \sim 40^{\circ}C$ (32°F ~104°F)

Storage Temperature: -40°C~70°C (-40°F ~158°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing

AC2300 Wireless MU-MIMO Gigabit Router Archer C2300

www.tp-link.com

TP-Link AC2300 Wireless MU-MIMO Gigabit Router Archer C2300

Specifications are subject to change without notice. TP-Link is a registered trademarks or registered trademarks of their respective holders. Copyright ©2017 TP-Link Technologies Co., Ltd. All rights reserved. *NitroQAM™ technology by Broadcom®

^{*}Maximum wireless transmission rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless transmission rate and wireless transmission rate and wireless coverage are not guaranteed, and will vary as a result of 1) environmental factors, including building materials, physical objects and obstacles, 2) network complexity, and network overhead and 3) client limitations, including rated performance, location, connection quality, and client condition.