

PRODUCT SPECIFICATION

802.11b/g/n 2T2R Wireless LAN USB Module

WN4645R

MT7603U

User Manual

CONTENT

PRODUCT FEATURES	7
PRODUCT SPECIFICATIONS.....	8
MAIN CHIPSET	8
FUNCTIONAL SPECIFICATIONS.....	8
RECOMMENDED OPERATION CONDITIONS.....	10
DC CHARACTERISTICS.....	10
RESET TIMING SPEC.....	10
PIN ASSIGMENT.....	11
USB CONNECTOR SPEC.....	11
EEPROM INFORMATION	12
ENVIRONMENTAL	12
OPERATING	12
STORAGE.....	12

FCC Statement:

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with FCC multi-transmitter product procedures.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without C2PC.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

IMPORTANT NOTE:

This module is intended for OEM integrator. The OEM integrator is responsible for the compliance to all the rules that apply to the product into which this certified RF module is integrated.

Additional testing and certification may be necessary when multiple modules are used.

20 cm minimum distance has to be able to be maintained between the antenna and the users for the host this module is integrated into. Under such configuration, the FCC radiation exposure limits set forth for an population/uncontrolled environment can be satisfied.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20 cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio•frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the

manufacturer could void the user's authority to operate this equipment. If the size of the end product is smaller than 8x10cm, then additional FCC part 15.19 statement is required to be available in the users manual: This device complies with Part 15 of FCC rules. Operation is subject to the following two

conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: AK8WN4645R ". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this

device must accept any interference received, including interference that may cause undesired operation.

OEM Integrator Checklist

The party below will implement the LITE-ON Module in host systems in accordance with the instructions specified in this document and the documents referenced herein.

1. The OEM integrator will ensure the Module is integrated in a host systems using only the approved antenna model(s) described in this document.
2. The OEM integrator will ensure the antenna placement inside the host system will maintain the required spacing to end user for RF Exposure compliance, as specified in this document.
3. If other radios are integrated inside the host with the LITE-ON Module, the OEM integrator will contact its test lab, TCB or LITE-ON to determine if additional FCC compliance evaluation is required to meet FCC collocation rules.
4. The OEM integrator will ensure end user documentation will contain the specified regulatory wording and ensure the host system and the Module itself are labeled as specified in this document.
5. The OEM integrator will ensure the Module is programmed in the factory with compliant transmit power not exceeding the levels specified in this document.

LITE-ON requests that the OEM integrator acknowledge its receipt of this document and the above instructions. You may contact LITE-ON with any questions concerning this document or the responsibilities of the OEM integrator.

IC Statement:

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

For product available in the USA/Canada market, only channel 1~11 can be operated.

Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

This device and its antenna(s) must not be co-located with any other transmitters except in accordance with IC multi-transmitter product procedures.

Referring to the multi-transmitter policy, multiple-transmitter(s) and module(s) can be operated simultaneously without reassessment permissive change.

Cet appareil et son antenne (s) ne doit pas être co-localisés ou fonctionner en association avec une autre antenne ou transmetteur.

IMPORTANT NOTE:

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled

environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

This module is intended for OEM integrator. The OEM integrator is still responsible for the IC compliance requirement of the end product, which integrates this module.

Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20 cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the IC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied. The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX IC: 409B-WN4645R ".

PRODUCT FEATURES

- Operate at ISM frequency Band (2.4GHz)
- IEEE Standards Support, 802.11b, 802.11g and 802.11n
- Support USB 2.0 host interface
- Enterprise level security supporting: WPA, WPA2, WPS2.0, WAPI
- Two-stream IEEE 802.11n support for 20MHz and 40MHz bandwidth channels provides PHY layer rates up to 300Mbps
- Integrated LNA, PA and T/R switch
- Support Wi-Fi Direct
- RoHS compliance
- Low Halogen compliance

PRODUCT SPECIFICATIONS

MAIN CHIPSET

MAC/ Baseband/ RF: MediaTek MT7603U

FUNCTIONAL SPECIFICATIONS

Wi-Fi Function	
Standard	IEEE802.11b; IEEE 802.11g; IEEE 802.11n
Bus Interface	USB2.0
Data Rate	<p><i>802.11b:</i> 11, 5.5, 2, 1 Mbps</p> <p><i>802.11g:</i> 54, 48, 36, 24, 18, 12, 9, 6 Mbps</p> <p><i>802.11n:</i> MCS 0 to 15 for HT20MHz MCS 0 to 15 for HT40MHz</p>
Media Access Control	CSMA/CA with ACK
Modulation Techniques	<p><i>802.11b:</i> CCK, DQPSK, DBPSK</p> <p><i>802.11g:</i> 64QAM, 16QAM, QPSK, BPSK</p> <p><i>802.11n:</i> 64QAM, 16QAM, QPSK, BPSK</p>
Network Architecture	Ad-hoc mode (Peer-to-Peer) Infrastructure mode
Operation Channel	<p><i>2.4GHz</i> 11: (Ch. 1-11) – United States 13: (Ch. 1-13) – Europe 14: (Ch. 1-14) – Japan</p>
Frequency Range	<p><i>802.11bg</i> 2.400 ~ 2.4835 GHz</p>
Receiver Sensitivity	<p><i>802.11b:</i> -88 dBm@1Mbps -82 dBm@11Mbps</p> <p><i>802.11g:</i> -86 dBm@6Mbps -71 dBm@54Mbps</p> <p><i>802.11n:</i> 20MHz -86 dBm@MCS0</p>

	-68 dBm@MCS7 40MHz -83 dBm@MCS0 -65 dBm@MCS7		
Security	WPA, WPA2, WPS, WEP 64b&128bit, IEEE 802.1X, IEEE 802.11i		
Operating Voltage	5V ± 10% I/O supply voltage		
OS Supported	Linux based		
Power Consumption	<i>Mode</i>	<i>Average</i>	<i>Peak</i>
		2.4G	2.4G
	<i>TX</i>	332mA	700mA
	<i>RX</i>	210mA	
	<i>Unassociated Idle</i>	100mA	
<i>Standby@ wake mode</i>	48mA		
Antenna Type	Metal antenna		

RECOMMENDED OPERATION CONDITIONS

For Module

Symbol	Rating	Min	Typ	Max	Units
VCC	5V Supply Voltage	4.5	5	5.5	V


For MT7603U IC

Symbol	Rating	Min	Typ	Max	Units
VDD33	3.3V Supply Voltage	2.97	3.3	3.63	V
VDD12	1.2V Supply Voltage	1.14	1.2	1.26	V
VDD16	1.6V Supply Voltage	1.34	1.6	1.76	V

DC CHARACTERISTICS

Symbol	Parameter	Min	Typ	Max	Units
V _{IL}	Input Low Voltage	-0.28	-	0.6	V
V _{IH}	Input High Voltage	2.0	-	3.63	V
V _{OL}	Output Low Voltage	-0.28	-	0.4	V
V _{OH}	Output High Voltage	2.4	-	3.63	V

RESET TIMING SPEC

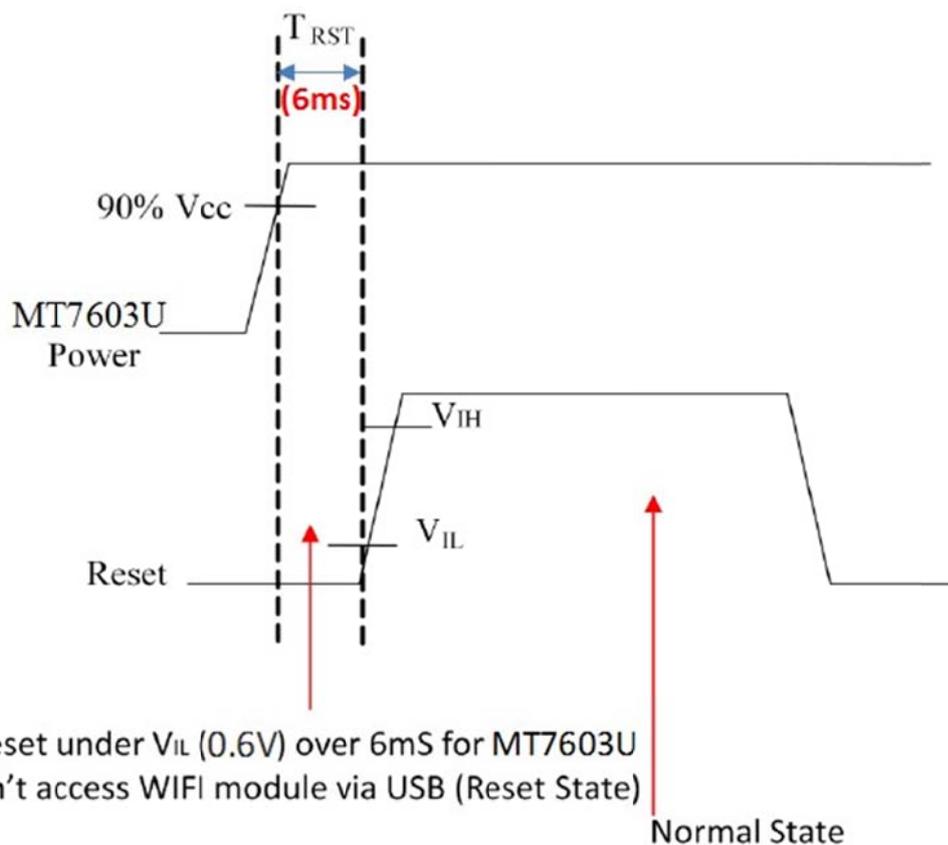

Keep Reset under V_{IL} (0.6V) over 6mS for MT7603U and don't access WIFI module via USB (Reset State)

Normal State


PIN ASSIGNMENT

Pin.	Pin Define	Description	Status
1	+5VCC	5V source	YES
2	+5VCC	5V source	YES
3	USB_D-	USB Data-	YES
4	USB_D+	USB Data+	YES
5	GND	Ground	YES
6	RESET#	System reset MT7603U, low active	YES
7	WoWLAN#	Wake up system via wifi, low active	YES
8	GND	Ground	YES

USB CONNECTOR SPEC

Manufacture P/N: S1315-08RVB-SB3-KH

Thickness of gold flash plated: $\geq 1\mu$ "

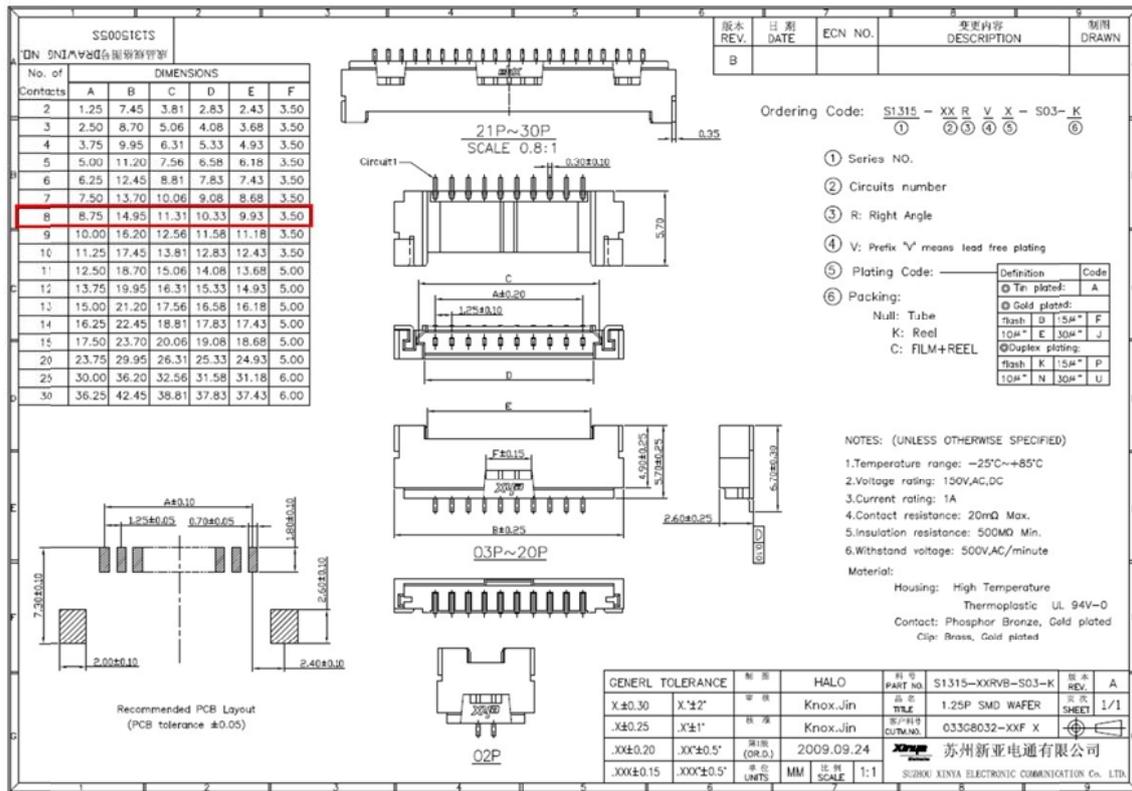

EEPROM INFORMATION

Reg Domain	World Wide 2.4G Read from registry; Control by driver
	Offset 0x39 for 2.4G: 0xFF
Vendor ID	0x0E8D
Product ID	0x7603

ENVIRONMENTAL**Operating**

Operating Temperature: 0 to 70 °C (32 to 158 °F)

Relative Humidity: 5-90% (non-condensing)

Storage

Temperature: -20 to 70 °C (-4 to 158 °F)

Relative Humidity: 5-95% (non-condensing)