

**AP5010DN-AGN Wireless LAN Access Point
V200R002C00**

Product Description

Issue 01
Date 2012-10-31

Copyright © Huawei Technologies Co., Ltd. 2012. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <http://enterprise.huawei.com>

Contents

1 Product Orientation and Characteristics.....	1
2 Product Structure.....	5
3 Functions and Features.....	7
4 Technical Specifications.....	10

1 Product Orientation and Characteristics

Product Orientation


The AP5010DN-AGN is a standard indoor dual-band 2x2 MIMO access point (AP) that supports 2.4 GHz and 5 GHz frequency bands. It complies with IEEE 802.11a/b/g/n supports 2.4 GHz and 5 GHz frequency bands, and has enhanced coverage performance and protection capabilities. It supports wireless bridging, complies with IEEE 802.11a/b/g/n, connects a large number of users, and works as a Fit AP. The AP5010DN-AGN has the following advantages:

- High reliability
- High security
- Simple network deployment
- Automatic AC discovery and configuration
- Real-time management and maintenance

The AP5010DN-AGN is recommended for use in buildings with a simple structure, small area, a high density of users, and require a high capacity, for example, small-scale meeting rooms, bars, and entertainment places. The AP5010DN-AGN APs can be flexibly deployed in these places and work in both Fit AP and bridge mode

The AP5010DN-AGN is for use in Fit AP and bridge networking scenarios.

Figure 1-1 Fit AP networking

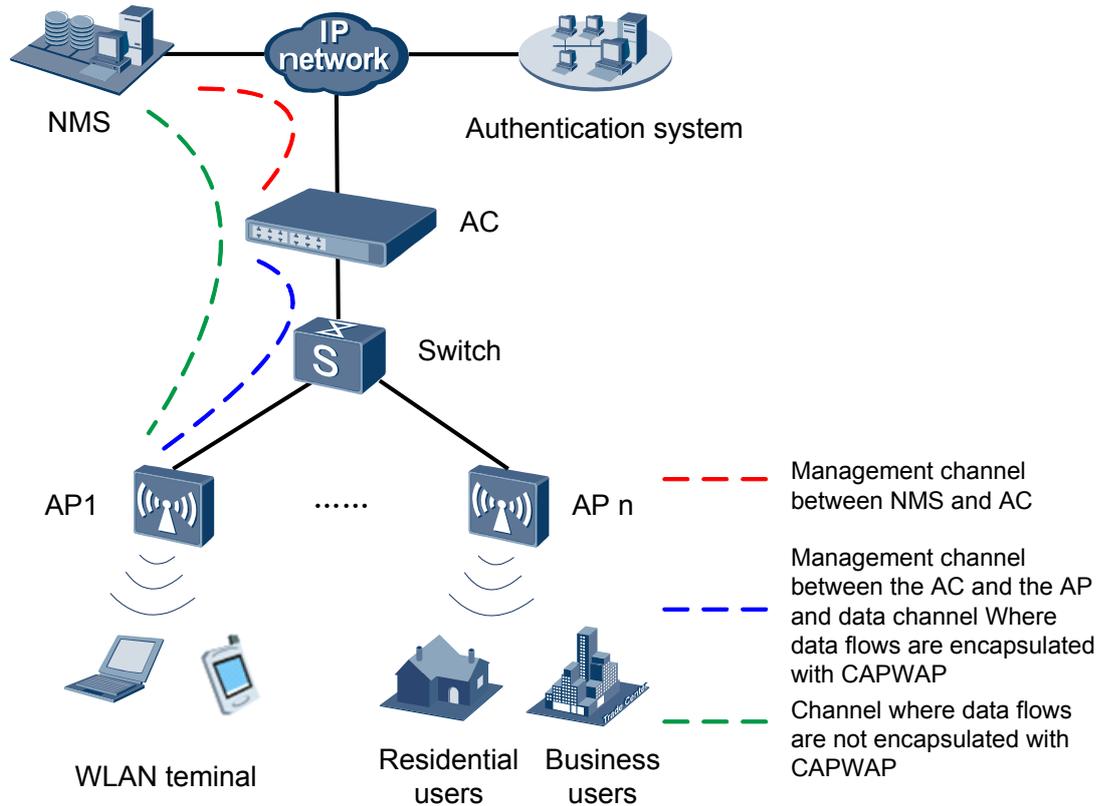

In this networking, the AP5010DN-AGN functions as a Fit AP that provides only data forwarding functions. The AC is responsible for user access, authentication, AP management, and configurations of security protocols, routing, and QoS.

Figure 1-2 WDS networking (point-to-point)


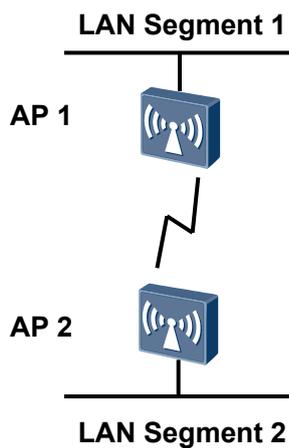


Figure 1-3 WDS networking (point-to-multipoint)

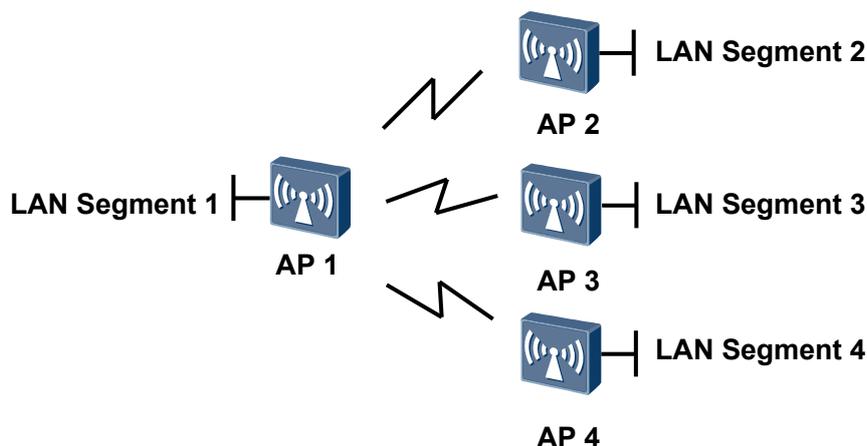

In this networking, the AP5010DN-AGN connects two or more independent wired or wireless LANs through wireless links to realize communication between the LANs. In a Wireless Distribution System (WDS), the AP5010DN-AGN supports point-to-point, point-to-multipoint networking modes. The AP implements wireless bridging and access functions using 5 GHz and 2.4 GHz frequency bands.

Product Characteristics

The AP5010DN-AGN has the following characteristics on the WLAN.

Product Characteristics	Description
Highly reliable wireless access	<ul style="list-style-type: none"> ● Complies with IEEE 802.11 b/g/n. ● Supports 2x2 MIMO, and provides a maximum rate of 300 Mbit/s for each spatial stream. ● Uses Wi-Fi Multimedia (WMM) to implement priority scheduling based on the service type (voice, video, or data), and supports priority mapping on the air interface and wired interface. ● Supports wired link integrity check. ● Supports load balancing. ● Supports roaming without service interruptions. ● Supports AC Dual-Link Backup. ● Supports the beamforming technique. ● Uses the latest 802.11n chip to provide higher performance and wider coverage. ● Has a strong coverage capability.
Comprehensive user access control capability	<ul style="list-style-type: none"> ● Supports access control lists (ACLs) and user access controls based on user group policies. ● Provides per-user bandwidth management. ● Supports user isolation policies. ● Supports AC authentication.

Product Characteristics	Description
High security	The AP5010DN-AGN supports multiple authentication and encryption modes and provides various measures to enhance system security: <ul style="list-style-type: none"> ● Wired Equivalent Privacy (WEP) ● Wi-Fi Protected Access (WPA)/WPA2 ● WLAN Authentication and Privacy Infrastructure (WAPI) ● 802.1X ● Detection of unauthorized APs
Flexible networking and environment adaptability	<ul style="list-style-type: none"> ● For use in Fit AP and WDS networking scenarios. ● Automatically selects the transmission rate, channel, and transmit power to adapt to multiple radio environments and limit interference in real time. ● Adjusts bandwidth allocation based on the number of users and radio environment.
Simple device management and maintenance	<ul style="list-style-type: none"> ● Automatically discovers ACs and loads the AC (plug-and-play) configuration. ● Supports batch upgrade. ● Monitored by the NMS in real time. You can remotely configure APs and locate faults on APs using the NMS. ● Supports the Link Layer Discovery Protocol (LLDP) to implement automatic link discovery and obtain the network topology.

2 Product Structure

Appearance

Figure 2-1 shows the appearance of the AP5010DN-AGN.



NOTE

The actual device appearance may differ from the figure, but the appearance does not affect device

Figure 2-1 Appearance of the AP5010DN-AGN



Ports

Figure 2-2 shows ports on the AP5010DN-AGN.

Figure 2-2 Ports of the AP5010DN-AGN



1. Console port.
2. ETH/PoE: 10/100/1000M port, which connects to the Ethernet. The port can connect to a PoE switch or a PoE power source to receive power.
3. Default: restores factory settings.

4. Power input port: 12 V DC.
5. Lock port: protects the AP5010DN-AGN against theft.

LED Indicators

Type	Color	Frequency	Description
Default status	Green	Steady on	When the system is being powered on, the indicator is steady green. When the system software is running, the indicator status depends on the software running result.
Running	Green	0.5 Hz	The system is running properly, the Ethernet connection is correct, and STAs are associated with the AP.
		0.2 Hz	The system is running properly, and the Ethernet connection is correct. However, no user connects to the AP, and the system is in low-power state.
Alarm	Green	4 Hz	The CAPWAP link is disconnected during an upgrade.
Error	Red	Steady on	A fault that affects services has occurred and cannot be rectified automatically. For example, the system fails to load the DRAM or system software. The fault needs to be rectified manually.

3 Functions and Features

Functions and Features Supported by the AP5010DN-AGN

Table 3-1 Features

Features	Description
WLAN features	<ul style="list-style-type: none"> ● Compliance with IEEE 802.11a/b/g/n, providing a maximum rate of 300 Mbit/s/216 Mbit/s for each radio ● Maximum ratio combining (MRC) ● Maximum-likelihood detection (MLD) ● Aggregate data units, including A-MPDU (Tx/Rx) and A-MSDU (Rx only) ● 802.11 dynamic frequency selection (DFS) ● Short GI in 20 MHz and 40 MHz modes ● Priority mapping and packet scheduling based on a Wi-Fi Multimedia (WMM) profile to implement priority-based data processing and forwarding ● Automatic and manual rate adjustment (the rate is adjusted automatically by default) ● WLAN channel management and channel rate adjustment <p>NOTE For details about WLAN channel management, see the <i>Country codes & Channels compliance status</i>.</p> <ul style="list-style-type: none"> ● Automatic channel scanning (the AP5010DN-AGN scans channels used by other APs, measures their interference, and reports the scanning result to the AC to trigger channel adjustment) ● Service set identifier (SSID) hiding ● Signal sustain technology (SST) ● Unscheduled automatic power save delivery (U-APSD) ● Control and Provisioning of Wireless Access Points (CAPWAP) ● Automatic AC discovery

Features	Description
Network features	<ul style="list-style-type: none"> ● Compliance with IEEE 802.3u ● Ports: Auto-negotiation of the rate and duplex mode and automatic switching between the Media Dependent Interface (MDI) and Media Dependent Interface Crossover (MDI-X) mode ● VLAN assignment based on SSIDs ● VLAN aggregation on uplink Ethernet ports ● 4093 VLAN IDs (1-4093) and 16 virtual APs (VAPs) ● Uplink ports in tagged and untagged mode ● DHCP client ● PPPoE dialup ● Centralized data forwarding and local data forwarding ● STA isolation in the same VLAN ● ACL ● LLDP ● Uninterrupted service forwarding upon CAPWAP channel disconnection in direct forwarding mode ● Uniform authentication on an AC ● Dual-AC backup
QoS features	<ul style="list-style-type: none"> ● Priority mapping and packet scheduling based on WMM profiles to implement priority-based data processing and forwarding ● WMM parameter management for each radio frequency ● WMM power saving ● Priority mapping for upstream packets and flow-based mapping for downstream packets ● Queue mapping and scheduling ● User-based bandwidth limiting ● Adaptive bandwidth allocation (the system dynamically adjusts bandwidth based on the number of users and radio environment)
Security features	<ul style="list-style-type: none"> ● Open system authentication ● WEP authentication/encryption ● WPA/WPA2 authentication and encryption ● 802.1x authentication and encryption ● WAPI authentication and encryption

Features	Description
Maintenance features	<ul style="list-style-type: none">● AP management and maintenance by the AC● Plug-and-play: automatic AC discovery and automatic configuration loading● Batch upgrade● Debugging using Telnet and the serial interface● Real-time configuration monitoring and fast fault location by using the NMS● System status alarm

4 Technical Specifications

Specifications

Table 4-1 Specifications of the AP5010DN-AGN

Item		Description
Technical specifications	Dimensions (H x W x D)	50 mm x 180 mm x 180 mm
	Weight	0.4 kg
	System memory	<ul style="list-style-type: none"> ● 128 MB DRAM ● 32 MB flash memory
Power specifications	Power input	<ul style="list-style-type: none"> ● DC 12V±10% ● POE Power: -48V DC ● PoE function in compliance with IEEE 802.3af and 802.3at
	Maximum power consumption	9.5 W NOTE The maximum power consumption depends on local laws.
Environment parameters	Operating temperature	-10°C to +50°C
	Storage temperature	-40°C to +70°C
	Humidity	5% to 95% (non-condensing)
	Waterproof grade	IP31
	Altitude	-60 m to 4000 m

Antenna Parameters

Table 4-2 Antenna parameters of the AP5010DN-AGN

Item	Description			
Antenna type	Built-in antenna			
Antenna gain	2.4GHz: 4 dBi 5GHz: 5 dBi			
Maximum number of concurrent users	≤ 128			
Maximum transmit power	17 dBm ● You can adjust the transmit power from the maximum to 15 dBm, with a step of 1 dBm. NOTE Actual transmit power depends on local laws and regulations.			
Maximum number of non-overlapping channels	2.4 GHz 802.11b/g ● 20MHz: 3 802.11n ● 20MHz: 3		5 GHz 802.11a ● 20MHz: 21 802.11n ● 20MHz: 21 ● 40MHz: 9	
Channel rate	802.11b: 1, 2, 5.5, and 11 Mbit/s			
	802.11g: 6, 9, 12, 18, 24, 36, 48, and 54 Mbit/s			
	802.11n data rate (2.4 GHz and 5 GHz)			
	GI=800 ns		GI=400ns	
	20 MHz (Mbit/s)	40 MHz (Mbit/s)	20 MHz (Mbit/s)	40 MHz (Mbit/s)
	6.5 @ MCS0	13.5 @ MCS0	7.2 @ MCS0	15 @ MCS0
	13 @ MCS1	27 @ MCS1	14.4 MCS1	30 MCS1
	19.5 @ MCS2	40.5 @ MCS2	21.7 @ MCS2	45 @ MCS2
	26 @ MCS3	54 @ MCS3	28.9 @ MCS3	60 @ MCS3
	39 @ MCS4	81 @ MCS4	43.3 @ MCS4	90 @ MCS4
	52 @ MCS5	108 @ MCS5	57.8 @ MCS5	120 @ MCS5
	58.5 @ MCS6	121.5 @ MCS6	65 @ MCS6	135 @ MCS6
	65 @ MCS7	135 @ MCS7	72.2 @ MCS7	150 @ MCS7

Item	Description			
	13 @ MCS8	27 @ MCS8	14.4 @ MCS8	30 @ MCS8
	26 @ MCS9	54 @ MCS9	28.9 @ MCS9	60 @ MCS9
	39 @ MCS10	81 @ MCS10	43.3 @ MCS10	90 @ MCS10
	52 @ MCS11	108 @ MCS11	57.8 @ MCS11	120 @ MCS11
	78 @ MCS12	162 @ MCS12	86.7 @ MCS12	180 @ MCS12
	104 @ MCS13	216 @ MCS13	115.6 @ MCS13	240 @ MCS13
	117 @ MCS14	243 @ MCS14	130 @ MCS14	270 @ MCS14
	130 @ MCS15	270 @ MCS15	144.4 @ MCS15	300 @ MCS15
<p>NOTE Modulation coding scheme (MCS) index: determines the spatial flow quantity, modulation, coding rate, and data rate. Guard interval (GI): indicates the period in nanoseconds the radio listens between packets.</p>				
Receiver sensitivity	2.4 GHz 802.11b (CCK) <ul style="list-style-type: none"> ● -91 dBm @ 1 Mb/s ● -89 dBm @ 2 Mb/s ● -88 dBm @ 5.5 Mb/s ● -85 dBm @ 11 Mb/s 	2.4 GHz 802.11g (non-HT20) <ul style="list-style-type: none"> ● -89 dBm @ 6 Mb/s ● -88 dBm @ 9 Mb/s ● -85 dBm @ 12 Mb/s ● -83 dBm @ 18 Mb/s ● -80 dBm @ 24 Mb/s ● -76 dBm @ 36 Mb/s ● -71 dBm @ 48 Mb/s ● -70 dBm @ 54 Mb/s 	5 GHz 802.11a (non-HT20) <ul style="list-style-type: none"> ● -89 dBm @ 6 Mb/s ● -88 dBm @ 9 Mb/s ● -85 dBm @ 12 Mb/s ● -83 dBm @ 18 Mb/s ● -80 dBm @ 24 Mb/s ● -76 dBm @ 36 Mb/s ● -71 dBm @ 48 Mb/s ● -70 dBm @ 54 Mb/s 	

Item	Description		
	2.4 GHz	5 GHz	5 GHz
	802.11n (HT20)	802.11n (HT20)	802.11n (HT40)
	<ul style="list-style-type: none"> ● -83 dBm @ MCS0/8 ● -80 dBm @ MCS1/9 ● -78 dBm @ MCS2/10 ● -75 dBm @ MCS3/11 ● -71 dBm @ MCS4/12 ● -67 dBm @ MCS5/13 ● -66 dBm @ MCS6/14 ● -65 dBm @ MCS7/15 	<ul style="list-style-type: none"> ● -83 dBm @ MCS0/8 ● -80 dBm @ MCS1/9 ● -78 dBm @ MCS2/10 ● -75 dBm @ MCS3/11 ● -71 dBm @ MCS4/12 ● -67 dBm @ MCS5/13 ● -66 dBm @ MCS6/14 ● -65 dBm @ MCS7/15 	<ul style="list-style-type: none"> ● -80 dBm @ MCS0/8 ● -77 dBm @ MCS1/9 ● -75 dBm @ MCS2/10 ● -72 dBm @ MCS3/11 ● -68 dBm @ MCS4/12 ● -64 dBm @ MCS5/13 ● -63 dBm @ MCS6/14 ● -62 dBm @ MCS7/15

Standards Compliance

- Safety standards
 - UL 60950-1
 - IEC 60950-1
 - EN 60950-1
 - GB 4943
- Radio standards
 - ESTI EN 300 328
 - ESTI EN 301 893
 - RSS-210
- EMC standards
 - EN 301.489-1
 - EN 301.489-17
 - ICES-003
 - YD/T 1312.2-2004
 - EN55022 (Class B)
- IEEE standards
 - IEEE 802.11a/b/g
 - IEEE 802.11n
 - IEEE 802.11h

- IEEE 802.11d
- IEEE 802.11e
- Security standards
 - 802.11i, Wi-Fi Protected Access 2 (WPA2), WPA
 - 802.1x
 - Advanced Encryption Standards (AES), Temporal Key Integrity Protocol (TKIP)
 - EAP Type(s)
- Environment standards
 - ETSI 300 019-2-1
 - ETSI 300 019-2-2
 - ETSI 300 019-2-3
- EAP types
 - EAP-TLS/TTLS, PEAP, EAP-MD5, EAP-SIM
- Multimedia
 - WMM™