

802.11g Wireless Router

User's Manual

FCC Certifications



Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

IEEE 802.11b or 802.11g operation of this product in the U.S.A. is firmware-limited to channels 1 through 11.

CE Mark Warning



This equipment complies with the requirements relating to electromagnetic compatibility, EN 55022 class B for ITE, the essential protection requirement of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

Company has an on-going policy of upgrading its products and it may be possible that information in this document is not up-to-date. Please check with your local distributors for the latest information. No part of this document can be copied or reproduced in any form without written consent from the company.

Trademarks:

All trade names and trademarks are the properties of their respective companies.

Copyright © 2006, All Rights Reserved.

Table of Contents

Unpacking Information	1
Introduction To Wireless Router	2
General Description	2
Key Features	3
The Front Panel	4
System LEDs	4
Port LEDs (Wireless)	4
Port LEDs (WAN)	4
Port LEDs (LAN)	5
The Rear Panel	5
Power Connection	5
Placement (Optional)	5
Restore Default Button	6
Installing And Using Wireless Router	7
Network configuration setup	7
Computer configuration setup	8
Management	10
Wireless Router configuration setup	10
Setup Wizard	12
Operation Mode	16
Wireless	17
Basic Settings	17
Advanced Settings	19
Security	21
Access Control	23
WDS Setting	24
TCP/IP Setting	25

LAN Interface Setup	25
WAN Interface Setup	26
Static IP Mode.....	26
Firewall Configuration	30
Port Filtering	30
IP filtering	31
MAC filtering	32
Port forwarding	33
URL Filtering	34
Virtual DMZ	35
Management	36
Status	36
Statistics	38
DDNS	38
Time Zone Setting	39
System Log	39
Upgrade Firmware.....	40
Save and Reload Settings	41
Password.....	41
Product Specifications.....	42

Unpacking Information

Thank you for purchasing the product. Before you start, please check all the contents of this package.

The product package should include the following:

1. One Wireless Router
2. One power adapter
3. One User Manual (CD)
4. One detachable antenna

Introduction To Wireless Router

General Description

The Wireless Router built-in with 4-port 10/100Mbps Fast Ethernet Switch is the latest generation of Wireless router product for Home/Office and SOHO users. This full-feature and self-contained compact Wireless Router will be fully for broadband access in both of LAN and Wireless environment. This device has been specifically designed to provide LAN and Wireless users the most cost-effective method with multiple accesses to the Internet at the cost of a single public IP address (IP Sharing) and enjoy the true Plug-and-Play installation. Moreover, the built-in 4-port 10/100Mbps switch lets users plug the network cable into the device without buying additional switch.

This device is also an Access Point. It has a built-in wireless LAN. Users can connect to Internet using wireless network interfaces anywhere within the range of its radio transmission. It's ideal for SOHO users who require instant and convenient access to Internet without the restriction of connecting cables.

The friendly WEB-based graphics interface for setup makes any inexperienced users soon enter plug-and-play operation. Embedded DHCP server simplified IP address management and no MIS people needed for daily technical services. What is more, NAT/firewall is also implemented on this compact Router Box for protecting whole LAN from outside attack.

Key Features

The switch provides the following key features:

- n** Complies with IEEE 802.11b/g wireless standards
- n** Provides one 802.11b/g wireless Reverse SMA detachable antenna
- n** High speed transfer data rate up to 54Mbps
- n** Supports turbo mode for 72Mbps data transfer
- n** Supports wireless data encryption with 64/128-bit WEP, WPA (TKIP with IEEE 802.1x), WPA2 and AES functions
- n** Supports system log
- n** Supports authentication for wireless connectivity based on ESSID
- n** Provides MAC access control and hidden SSID function
- n** WDS supported with WEP, TKIP and AES encryption
- n** Channel : USA 11, Europe 13, Japan 14
- n** Supports NAT/NAPT IP Sharing
- n** Supports Static IP, PPPoE, PPTP, & DHCP client
- n** SPI Anti-DoS Firewall; Virtual DMZ; DNS relay; UPnP
- n** Provides DHCP server
- n** Supports VPN pass through
- n** Supports ALG for FTP, NetMeeting, VPN pass-through, DDNS (DynDNS, TZO)
- n** Supports firmware upgrade function via Web
- n** Compliant with FCC Part 15.247 for US, ETS 300 328 for Europe
- n** Flash : 2MB NOR type, SDRAM : 8MB
- n** Certifications : FCC Class B, CE Mark, VCCI Class B

The Front Panel

The front panel of the Wireless Router is shown below.



System LEDs

System LED indicators locate on the front panel for showing the operating status of the whole device.

- I PWR (Power) LED
This indicator lights green when the Wireless Router is receiving power; otherwise, it is off.
- I Status LED
The LED will be dark for a few seconds when the system is started. After that, the LED will blink periodically to show the Wireless Router is working normally. If the LED stays green/dark that means the system failed, you need to contact your agent or try to reboot the system.

Port LEDs (Wireless)

- I ACT LED
 - I. When Wireless AP is ready for data transmitting and receiving, it is steady green.
 - II. When the data is transmitting or receiving, it is blinking green.

Port LEDs (WAN)

Port LED (WAN) indicators locate on the front panel for showing the operating status of WAN port.

- I Act/Link LED
The LED stays light (green) means the port has good linkage to its associated devices.
The LED will blink green when there is traffic transverse the port.


Port LEDs (LAN)

Port LEDs (LAN) indicators locate on the front panel for showing the operating status of 10/100Mbps Fast Ethernet switching ports.

- I Act/Link LED
Every port has a Act/Link LED. Steady green (link state) indicates that the port has good linkage to its associated devices. Flashing green indicates that the port is receiving or transmitting data between its associated devices.

The Rear Panel

The rear panel of the Wireless Router is shown below

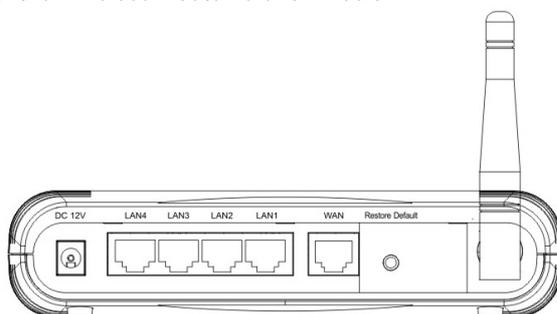

Power Connection

Plug the circle end of the power adapter firmly into the rear panel of the Wireless Router, and the other end put into an electric service outlet then the system is ready.

Placement (Optional)

There are three ways to place the Router. The first way is to place the Router horizontally on a surface. The second way is to attach the router to the wall. The third way is to stand the Router vertically on a surface. These options are explained in further detail below.

Desktop Option

1. The Router has one plastic stand that can be divided into two parts.
2. Combine one part of stand with the side of router.
3. Do the same with the second part.
4. Place the Router

Wall-mount option

Before attach this router on the wall, you have to finish the desktop option steps first.

1. Select a location with access for cables and a power outlet.
2. Unplug the unit. Place it upside down on a flat surface and mark the two holes for anchors.
3. Installing the Wall mount anchor (plastic) into the wall with tools such as drill or hammer.
4. Insert the provided screws in each hole of the stand parts.
5. Attaches the unit to the anchors on the wall.

Stand Option

1. The Router includes two stand parts.
2. Combine two parts into one stand. Combine it with the side of router near the power port. Push the stand up to snap it into place.
3. Place the Router.

Restore Default Button

1. Push the button for more than 5 seconds and then release it, the system will return to factory default setting. In the meantime, system rewrites flash to default value and Status LED halts for a while. Approximately 60 seconds later, the Status LED blinks green periodically, now the whole system parameters have returned to factory default value. If the process has been interrupted by any reason (power off...), the system will fail. Before performing the process, ensure a safe operating environment please !
2. To reboot the Router, Press the button for 2-5 seconds and then release it, and all the setting won't be erased. Wait for the Router to complete the reboot, and then you can start to use it.

Warning : Incomplete factory setting recovery procedure will cause the Wireless Router malfunction ! If you are unfortunately in this situation, do not try to repair it by yourself. Consult your local distributor for help !

Installing And Using Wireless Router

This Chapter provides a step-by-step guide to the installation and configuration of the Wireless Router. We suggest you go over the whole chapter and then do more advanced operation.

Network configuration setup

Steps to build up the network:

- Ø Connect the ADSL or Cable modem to the Ethernet WAN port on the back of the Wireless Router by using the UTP cable.
- Ø Connect the phone line from the wall socket to the line-in port on the ADSL modem, or the coaxial cable to the line-in port on the Cable modem.
- Ø Plug-in the power adapter to the modem and turn on the power. Install the Ethernet card into the computer by referring to the User Guide that came with the card.
- Ø Connect the computer to the Wireless Router by using standard twisted-pair Ethernet cable from the computer's Ethernet card to an 10/100Mbps Ethernet port on the back of the Wireless Router.
- Ø Plug-in the power adapter to the Router and the other side to the wall outlet.

Computer configuration setup


In order to communicate with this Wireless Router, you have to configure the IP addresses of your computer to be compatible with the device. The router supports DHCP server and it is enabled as default. Users that configure your IP address as “Obtain an IP address automatically” may skip the following IP configuration instruction.

Note:

1. The default network setting of the device:
IP address: 192.168.1.1
Subnet Mask: 255.255.255.0
DHCP Server: enabled
2. In the following TCP/IP configuration guide, the IP address “192.168.1.2 ” is assumed to be your IP address if you want to specify IP addresses manually. Please **DO NOT** choose 192.168.1.1 for the IP address (192.168.1.1) has been set as the default IP for this device.
3. The following TCP/IP configuration guide uses windows XP as the presumed operation system.

Procedures to configure IP addresses for your computer


1. If you are in Classic Start menu view, click Start à Settings à Control Panel à Network Connections.
If you are in Start menu view, click Start à Control Panel à Network Connections.
2. Double click “Local Area Connection”

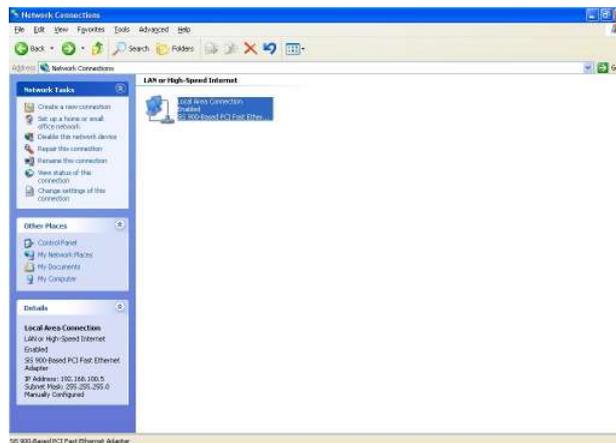

3. choose Internet Protocol (TCP/IP) and click Properties.



4. You may choose "Obtain an IP address automatically"(recommend) to get IP address automatically or choose "Use the following IP address" to specify IP addresses manually. Please click the OK button after your configuration.

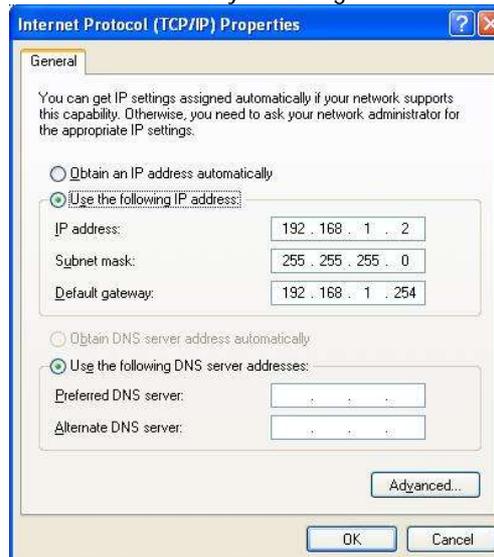

Management

Wireless Router configuration setup

In order to make the whole network operate successfully, it is necessary to configure the Wireless Router through your computer has a WEB browser installed. Please follow up the steps listed below.

1. Double click the Internet WEB browser icon on your desktop screen (Netscape Communicator 4.0 and Internet Explorer 3.0 or update version)
2. Type 192.168.1.1 into the URL WEB address location and press Enter.



3. The Username and Password Required window appears.
 - Enter **admin** in the User Name location (default value).
 - Enter **admin** in the Password location (default value).
 - Click "OK" button



4. The Graphic User Interface

After the password authorization, the Setup Wizard shows up as the home page of the Graphic User interface. You may click on each folder on left column of each page to get access to each configuration page.



Setup Wizard


If you are using the router for the first time, you may follow the procedures of the setup wizard to do a step-by-step configuration.

Note: The following instruction does an overall introduction to the Setup Wizard. For detail information to each item, please refer to instruction of each page.

1. To start the Setup Wizard, click the "Next" button to proceed.



2. Select your demanding operation mode and click "Next".

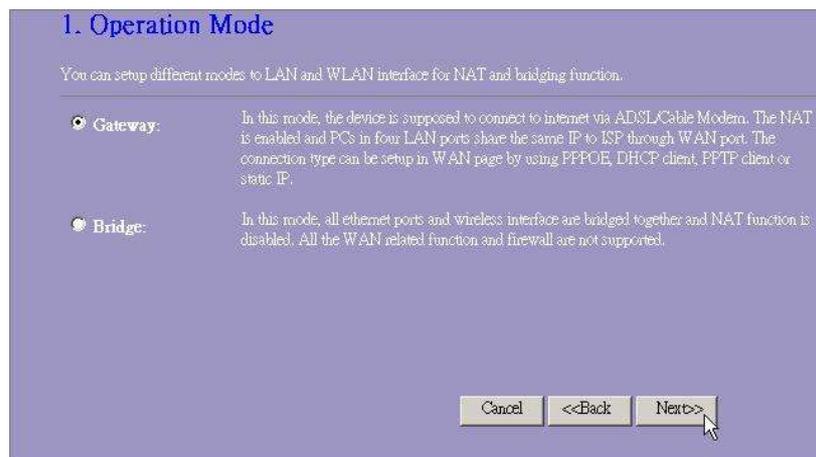

3. Mark the check box to enable synchronizing time by NTP server. Select the region you live and a NTP server by clicking the drop list then click "Next".

2. Time Zone Setting

You can maintain the system time by synchronizing with a public time server over the Internet.

Enable NTP client update

Time Zone Select : (GMT+08:00)Taipei

NTP server : 192.5.41.41 - North America

Cancel <<Back Next>>

4. Specify an IP address and subnet mask for connecting to the router in LAN.

3. LAN Interface Setup

This page is used to configure the parameters for local area network which connects to the LAN port of your Access Point. Here you may change the setting for IP address, subnet mask, DHCP, etc..

IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

Cancel <<Back Next>>

5. Select a WAN access type for the router to connect to Internet. Fill in the parameters that required in each blank, and then click the “Next” button. Those parameters should be provided by your ISP.

4. WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Access Type:

IP Address:

Subnet Mask:

Default Gateway:

DNS :

6. Select the wireless parameters that are used for associating with this router and click “Next”


7. Click the drop list to select the encryption type for your wireless network. Fill in the parameters for the encryption type you select and click finish to complete configuration.

6. Wireless Security Setup

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Encryption:

Operation Mode


To select an operation mode for this router, click on the mode that you want to perform and click the  button to execute.

Operation Mode

You can setup different modes to LAN and WLAN interface for NAT and bridging function.

Gateway: In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs in LAN ports share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPOE, DHCP client, PPTP client or static IP.

Bridge: In this mode, all ethernet ports and wireless interface are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.

Wireless

Wireless Access Point builds a wireless LAN and can let all PCs equipped with IEEE802.11b/g wireless network adaptor connect to your Intranet. It supports WEP encryption and MAC address filter to enhance the security of your wireless network.

Basic Settings

You can set up the configuration of your Wireless and monitor the Wireless Clients associate with your AP.

Configuration

Disable Wireless LAN Interface	To Disable interface of Wireless LAN
Band	To select a band for this device to match 802.11b, 802.11g or both.
Mode	Configure this device as AP, WDS or both.
Network type	When you configure this device in AP mode, this drop list allows users to change the network type into ad-hoc mode.
SSID	The name of the wireless network
Country	Select the region you live.
Associated Clients	Click "Show Active Clients" button, then an "Active Wireless Client Table" will pop up. You can see the status of all active wireless stations that are connecting to the access point.
Enable Universal Repeater Mode	Mark this checkbox to enable Universal Repeater Mode which acts this device as an AP and client simultaneously.
SSID of Extended Interface	While you enable the Universal Repeater Mode, you have to specify an SSID for the extended interface.

Click <Apply changes> button at the bottom of the screen to save the above configurations. You can now configure other advance sections or start using the router (with the advance settings in place)

ž Active Wireless Client Table

This is the window that pops up after clicking the “Show Active Clients” button.



MAC Address	MAC address of this active wireless station.
Tx Packet	The number of transmitted packets that are sent out from this active wireless station.
Rx Packet	The number of received packets that are received by this active wireless station.
TX Rate	The transmission rate
Power Saving	Shows if the wireless client is in Power Saving mode
Expired Time	This is the time in second before dissociation. If the wireless keeps idle longer than the expired time, this wireless router will dissociate it. The wireless client station has to associate again when it is active.
Refresh	Refresh the "Active Wireless Client Table".
Close	Close the "Active Wireless Client Table".

Advanced Settings

You can set advanced wireless LAN parameters of this router. The parameters include Authentication Type, Fragment Threshold, RTS Threshold, Beacon Interval, Data Rate, Preamble Type, Broadcast SSID, IAPP and 802.11g Protection. We recommend not changing these parameters unless you know what changes will be there on this router.

Wireless Advanced Settings

These settings are only for more technically advanced users who have a sufficient knowledge about wireless LAN. These settings should not be changed unless you know what effect the changes will have on your Access Point.

Authentication Type: Open System Shared Key Auto

Fragment Threshold: (256-2346)

RTS Threshold: (0-2347)

Beacon Interval: (20-1024 ms)

Data Rate:

Preamble Type: Long Preamble Short Preamble

Broadcast SSID: Enabled Disabled

IAPP: Enabled Disabled

802.11g Protection: Enabled Disabled

Apply Changes

Reset

Configuration

Authentication Type	Open System mode	Wireless AP can associate with this wireless router without WEP encryption.
	Shared Key mode	You should also setup WEP key in the "Security" page and wireless AP associating with this wireless router should use WEP encryption in the authentication phase.

	Auto	The wireless client can associate with this wireless router by using any one of these two Modes.
Fragment Threshold		To specifies the maximum size of packet during the data transition. The lower values you set, the worst performance it will be.
RTS Threshold		If the packet size is smaller the RTS threshold, the wireless router will not send this packet by using the RTS/CTS mechanism.
Beacon Interval		The period of time how long a beacon is broadcasted.
Data Rate		The "Data Rate" is the data packets limitation this wireless router can transmit. The wireless router will use the highest possible selected transmission rate to transmit the data packets.
Preamble Type		It defines the length of CRC block in the frames during the wireless communication. "Short Preamble" is suitable for heavy traffic wireless network. "Long Preamble" provides much communication reliability
Broadcast SSID		If you enable "Broadcast SSID", every wireless station located within the coverage of this wireless router can discover this wireless router easily. If you are building a public wireless network, enabling this feature is recommended. Disabling "Broadcast SSID" can provide better security.
IAPP		To enables multiple AP to communicate and pass information regarding the location of associated Stations.
802.11g Protection		Some 802.11g wireless adapters support 802.11g protection, which allows the adapters searches for 802.11g singles only. Select the "Disabled" to disable supporting 802.11g protection or select "enable" to support this function.

Click the <Apply Changes> button at the bottom of the screen to save the above configurations. You can now configure other advance sections or start using the router.

Security

At the page, you can set up the WEP, WPA Encryption to ensure the security of your Wireless.

Wireless Security Setup

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Encryption:

Use 802.1x Authentication WEP 64bits WEP 128bits

WPA Authentication Mode: Enterprise (RADIUS) Personal (Pre-Shared Key)

WPA Cipher Suite: TKIP AES

WPA2 Cipher Suite: TKIP AES

Pre-Shared Key Format:

Pre-Shared Key:

Enable Pre-Authentication

Authentication RADIUS Server: Port IP address Password

Note: When encryption WEP is selected, you must set WEP key value.

Configuration

Encryption	To enable WEP, WPA, WPA2 and WPA2 Mixed encryption modes, select the option in the drop list. If you select none, any data will be transmitted without Encryption and any station can access the router.
Use 802.1x Authentication	To enable the 802.1x, Click the check box of the item.
WPA Authentication Mode	There are two items, "Enterprise (WPA-Radius)" and "Personal (Pre-Shared Key)". You can select the mode by clicking the item.
WPA Cipher Suite	Select the WPA Cipher Suite to be TKIP or AES

WPA2 Cipher Suite	Select the WPA2 Cipher Suite to be TKIP or AES
Pre-Shared key Format	To decide the format, select what you need in the drop list.
Pre-shared Key	Enter the Pre-shared Key according to the pre-shared key format you select.
Enable Pre-Authentication	You can mark this checkbox to enable Pre-authentication after selecting Enterprise (RADIUS) WPA 2 authentication mode
Authentication RADIUS Sever	If you use RADIUS Sever to ensure your security, you have to set up the parameters in the item. To set up the Port, IP address and Password of your RADIUS, Enter the Port Number, IP and Password.

Click <**Apply Change**> at the bottom of the screen to save the above configurations. You can now configure other advance sections or start using the router.

Access Control

To restrict the Number of Access authentication of Stations, Set up the control list in this page.

Wireless Access Control

If you choose 'Allowed Listed', only those clients whose wireless MAC addresses are in the access control list will be able to connect to your Access Point. When 'Deny Listed' is selected, these wireless clients on the list will not be able to connect the Access Point.

Wireless Access Control Mode:

MAC Address: Comment:

Current Access Control List:

MAC Address	Comment	Select
-------------	---------	--------

Configuration

Wireless Access Control Mode	Click on the drop list to choose the access control mode. You may select "Allow listed" to allow those allowed MAC addresses or select "Deny Listed" to ban those MAC addresses from accessing to this device.
MAC Address & Comment	To set up the Value of MAC Address & Comment; enter the MAC Address and Comment of station and click Apply Changes to save.
Current Access Control list	To Delete the station on the list, Click the check box in the select item and click the "Delete Selected". If you want to delete all stations on the list, click "Delete All" to remove all of them.

Click <Apply Change> button to save the above configurations. You can now configure other advance sections or start using the router.

WDS Setting

WDS Settings

Wireless Distribution System uses wireless media to communicate with other APs, like the Ethernet does. To do this, you must set these APs in the same channel and set MAC address of other APs which you want to communicate with in the table and then enable the WDS.

Enable WDS

Add WDS AP: MAC Address

Comment

Current WDS AP List:

MAC Address	Comment	Select
		<input type="checkbox"/>

Wireless Distribution System allows the router to communicate with other APs wirelessly. To make it work, you must ensure that these APs and the Router are in the same Channel and add these APs MAC Address and Comment values into the WDS list. Don't Forget to Enable the WDS by click the check box of "Enable WDS" and press "Apply Changes" button to save.

To Delete the AP on the list, Click the check box in the select item and click the "Delete Selected". If you want to delete all APs on the list, click "Delete All" to remove all of them.

TCP/IP Setting

LAN Interface Setup

To set up the configuration of LAN interface, Private IP of you router LAN Port and Subnet mask for your LAN segment.

LAN Interface Setup

This page is used to configure the parameters for local area network which connects to the LAN port of your Access Point. Here you may change the setting for IP address, subnet mask, DHCP, etc..

IP Address:	<input type="text" value="192.168.1.1"/>
Subnet Mask:	<input type="text" value="255.255.255.0"/>
DHCP Server:	<input type="button" value="Enabled"/>
DHCP Client Range:	<input type="text" value="192.168.1.100"/> - <input type="text" value="192.168.1.200"/> <input type="button" value="Show Client"/>
802.1d Spanning Tree:	<input type="button" value="Disabled"/>
<input type="checkbox"/> Enable UPnP	
<input type="button" value="Apply Changes"/>	<input type="button" value="Reset"/>


Configuration

IP address	The IP of your Router LAN port (Default 192.168.1.1)
Subnet Mask	Subnet Mask of you LAN (Default 255.255.255.0)
DHCP Server	To give your LAN Client an IP, you have to enable "DHCP Server". If not, manual setting up your client IP is necessary when you want to use the router as your client's default gateway.
DHCP Client Range	Specify the DHCP Client IP address range. You can also click the "Show Client" button to listed those connected DHCP clients.
802.1d Spanning tree	To prevent from network loops and preserve the quality of bridged network
Enable UPnP	Mark this checkbox to allow this router to be recognized by uPnP.

WAN Interface Setup

This page allows users to configure those parameters for connecting to Internet. You may select the WAN Access Type from the drop list and configure parameters for each mode.


Static IP Mode

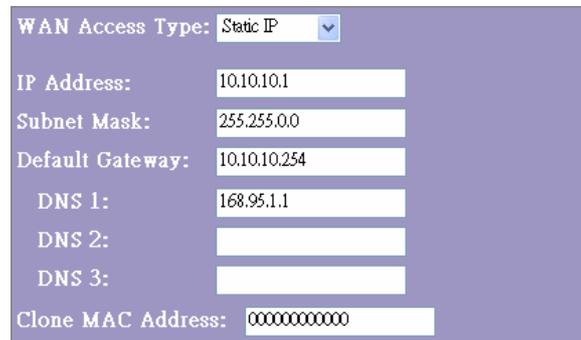

The screenshot shows the WAN Interface Setup page in Static IP Mode. The 'WAN Access Type' is set to 'Static IP'. The fields are filled with the following values: IP Address: 10.10.10.1, Subnet Mask: 255.255.0.0, Default Gateway: 10.10.10.254, DNS 1: 168.95.1.1, DNS 2: (empty), DNS 3: (empty), and Clone MAC Address: 000000000000.

IP Address, Subnet Mask and Default Gateway	Fill in the IP address, Subnet Mask and Default Gateway that provided by your ISP.
DNS 1, 2 and 3	To specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.

DHCP Client Mode

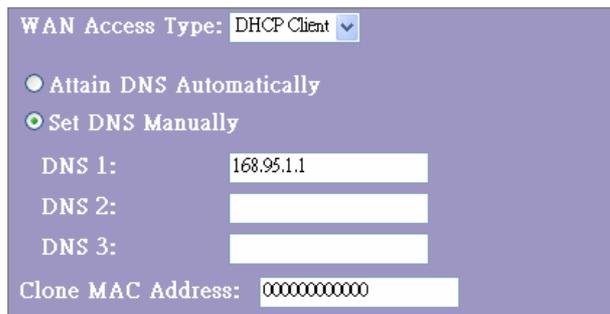

The screenshot shows the WAN Interface Setup page in DHCP Client Mode. The 'WAN Access Type' is set to 'DHCP Client'. The radio buttons are: 'Attain DNS Automatically' (selected) and 'Set DNS Manually'. The fields are filled with the following values: DNS 1: 168.95.1.1, DNS 2: (empty), DNS 3: (empty), and Clone MAC Address: 000000000000.

Attain DNS automatically:	If your DNS provide by ISP is dynamic, choose "Attain DNS automatically"
Set DNS Manually	To specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.

PPPoE Mode

WAN Access Type: PPPoE

User Name:

Password:

Service Name:

Connection Type: Continuous

Idle Time: 5 (1-1000 minutes)

MTU Size: 1452 (1400-1492 bytes)

Attain DNS Automatically

Set DNS Manually

DNS 1: 168.95.1.1

DNS 2:

DNS 3:

Clone MAC Address: 000000000000

User Name, password and service name	Fill in the User Name, password and service name that provided by your ISP.
Connection Type	<p>“Continuous” is for Always keep connection</p> <p>“Connect on demand” is for bill by connection time. You can set up the Idle time for the value specifies the number of time that elapses before the system automatically disconnects the PPPoE session.</p> <p>“Manual” To connect to ISP, click “Connect” manually from the WEB user interface. The WAN connection will not disconnected due to the idle timeout. If the WAN line breaks down and latter links again, the router will not auto-connect to the ISP.</p>
Idle Time:	The value specifies the number of idle time that elapses before the system automatically disconnects the PPPoE session.
MTU Size	<p>To Enable the Maximum Transmission Unit of Router setup. Any packet over this number will be chopped up into suitable size before sending. Larger number will enhance the transmission performance.</p> <p>Enter your MTU number in the text-box to set the limitation.</p>
Attain DNS automatically:	If your DNS provide by ISP is dynamic, choose “Attain DNS automatically
Set DNS Manually	To specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.

PPTP Mode

WAN Access Type:	<input type="text" value="PPTP"/>
IP Address:	<input type="text" value="172.16.1.2"/>
Subnet Mask:	<input type="text" value="255.255.255.0"/>
Server IP Address:	<input type="text" value="172.16.1.1"/>
User Name:	<input type="text" value="admin"/>
Password:	<input type="text" value="*****"/>
MTU Size:	<input type="text" value="1452"/> (1400-1492 bytes)
<input type="radio"/> Attain DNS Automatically	
<input checked="" type="radio"/> Set DNS Manually	
DNS 1:	<input type="text" value="168.95.1.1"/>
DNS 2:	<input type="text"/>
DNS 3:	<input type="text"/>

IP Address, Subnet Mask, Server IP Address, User Name and Password Fill in the IP address, Subnet Mask, Server IP Address, User Name and password that provided by your ISP.

MTU Size To Enable the Maximum Transmission Unit of Router setup. Any packet over this number will be chopped up into suitable size before sending. Larger number will enhance the transmission performance. Enter your MTU number in the text-box to set the limitation.

Attain DNS automatically: If your DNS provide by ISP is dynamic, choose "Attain DNS automatically"

Set DNS Manually To specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.

Common configurations for WAN interface

There are some settings are able to be configured on each WAN access types:



The screenshot shows a configuration window with a purple background. At the top, there is a text box labeled 'Clone MAC Address:' containing the value '000000000000'. Below this are four checkboxes, each followed by a label and a text box: 'Enable Web Server Access on WAN from port:' with '8080', 'Enable IPsec pass through on VPN connection', 'Enable PPTP pass through on VPN connection', and 'Enable L2TP pass through on VPN connection'. At the bottom of the window are two buttons: 'Apply Changes' and 'Reset'.

Enable Web Server Access on WAN from port	To Enable the user to access this Router through Internet, Enter the specific IP and the port number
Enable IPsec pass through on VPN connection	Mark the check box to enable IPsec pass through on VPN connection and clear the checkbox to disable.
Enable PPTP pass through on VPN connection	Mark the check box to enable PPTP pass through on VPN connection and clear the checkbox to disable.
Enable L2TP pass through on VPN connection	Mark the check box to enable L2TP pass through on VPN connection and clear the checkbox to disable.
Clone MAC Address	When ISP use MAC address authentication (with DHCP), then the MAC address of the Ethernet card attached to your Cable modem must be registered with the ISP before connecting to the WAN (Internet). If the Ethernet card is changed, the new MAC address must be registered with the ISP. MAC cloning feature allows the MAC address reported by WAN side network interface card to be set to the MAC address already registered with the ISP eliminating the need to register the new MAC address with the ISP. This feature does not change the actual MAC address on the NIC, but instead changes the MAC address reported by Wireless Router to client requests. To Change the MAC address, enter it in the text box.

Firewall Configuration

Port Filtering

The firewall could not only obstruct outside intruders from intruding your system, but also restricting the LAN users.

Port Filtering To restrict certain type of data packets from your LAN to Internet through the Router, add them on the Current Filtering Table.

Port Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Enable Port Filtering

Local Port Range: - Protocol: Both

Comment:

Apply Changes Reset

Current Filter Table:

Local Port Range	Protocol	Comment	Select
------------------	----------	---------	--------

Delete Selected Delete All Reset

Configuration

- | | |
|--------------|---|
| STEPS | <ol style="list-style-type: none">1. Click the check box of "Enable Port Filtering" to enable the function.2. Enter the Port range (EX 25-110), Protocol (UDP/TCP), and comment (EX. E-Mail)3. To Delete the Port range on the list, Click the check box in the select item and click the "Delete Selected". If you want to delete all entries on the list, click "Delete All" to remove all of them. |
|--------------|---|

Click <Apply Change> at the bottom of the screen to save the above configurations. You can now configure other advance sections or start using the router.

IP filtering

The Wireless Router could filter the outgoing packets for security or management consideration. You can set up the filter against the IP addresses to block specific internal users from accessing the Internet.

The screenshot shows the 'IP Filtering' configuration page. At the top, there is a title 'IP Filtering' and a descriptive paragraph: 'Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.' Below this, there is a checkbox labeled 'Enable IP Filtering'. Underneath, there are three input fields: 'Local IP Address:', 'Protocol:' (with a dropdown menu set to 'Both'), and 'Comment:'. At the bottom of this section are two buttons: 'Apply Changes' and 'Reset'. Below these is a section titled 'Current Filter Table:' which contains a table with four columns: 'Local IP Address', 'Protocol', 'Comment', and 'Select'. Below the table are three buttons: 'Delete Selected', 'Delete All', and 'Reset'.

Configuration

- | | |
|-------|---|
| STEPS | 1. Click the check box of "Enable IP Filtering" to enable the function. |
| | 2. Enter the specific Local IP address (EX 10.10.3.9), Protocol (UDP/TCP), and comment (EX. Peter) |
| | 3. To Delete the IP address on the list, Click the check box in the select item and click the "Delete Selected". If you want to delete all entries on the list, click "Delete All" to remove all of them. |

Click <Apply Change> at the bottom of the screen to save the above configurations. You can now configure other advance sections or start using the router.

MAC filtering

The Wireless Router could filter the outgoing packets for security or management consideration. You can set up the filter against the MAC addresses to block specific internal users from accessing the Internet.

The screenshot shows the 'MAC Filtering' configuration page. At the top, there is a title 'MAC Filtering' and a descriptive paragraph: 'Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.' Below this, there is a checkbox labeled 'Enable MAC Filtering'. Underneath, there are two input fields: 'Local MAC Address:' and 'Comment:'. At the bottom of this section are two buttons: 'Apply Changes' and 'Reset'. Below the input fields, there is a section titled 'Current Filter Table:' which contains a table with three columns: 'Local MAC Address', 'Comment', and 'Select'. Below the table are three buttons: 'Delete Selected', 'Delete All', and 'Reset'.

Configuration

- | STEPS | |
|-------|---|
| 1. | Click the check box of "Enable MAC Filtering" to enable the function. |
| 2. | Enter the specific MAC address (EX 00:0e:b6:a8:72), and comment (EX. Peter) |
| 3. | To Delete the MAC address on the list, Click the check box in the select item and click the "Delete Selected". If you want to delete all Entries on the list, click "Delete All" to remove all of them. |

Click <Apply Change> at the bottom of the screen to save the above configurations. You can now configure other advance sections or start using the router.

Port forwarding

The Port Forwarding allows you to re-direct a particular range of service port numbers (from the Internet/WAN Ports) to a particular LAN IP address. It helps you to host some servers behind the router NAT firewall.

Port Forwarding

Entries in this table allow you to automatically redirect common network services to a specific machine behind the NAT firewall. These settings are only necessary if you wish to host some sort of server like a web server or mail server on the private local network behind your Gateway's NAT firewall.

Enable Port Forwarding

Local IP Address: Protocol: Port Range: -

Comment:

Current Port Forwarding Table:

Local IP Address	Protocol	Port Range	Comment	Select
------------------	----------	------------	---------	--------

Configuration

- | | | |
|-------|----|--|
| STEPS | 1. | Click the check box of "Enable port forwarding" to enable the function. |
| | 2. | Enter the specific IP address (EX 10.10.10.10), Protocol (UDP/TCP), Port range (EX 25-110), and comment (EX. E-Mail) |
| | 3. | To Delete the IP address on the table, Click the check box in the select item and click the "Delete Selected". If you want to delete all Entries on the table, click "Delete All" to remove all of them. |

Click <Apply Change> at the bottom of the screen to save the above configurations.

URL Filtering

The URL Filter allows users to prevent certain URL from accessing by users in LAN. This filter will block those URLs that contain certain keywords.

The screenshot shows a web-based configuration page for URL filtering. At the top, the title "URL Filtering" is displayed in blue. Below the title, a descriptive text explains the function: "URL filter is used to deny LAN users from accessing the internet. Block those URLs which contain keywords listed below. (EX: google; www.google.com or 72.14.203.99)".

The main configuration area includes a checkbox labeled "Enable URL Filtering" which is currently unchecked. Below this is a text input field labeled "URL Address:". Underneath the input field are two buttons: "Apply Changes" and "Reset".

Below the input field is a section titled "Current Filter Table:". It contains a table with two columns: "URL Address" and "Select". Below the table are three buttons: "Delete Selected", "Delete All", and "Reset".

Configuration

- | | |
|-------|---|
| STEPS | 1. Click the check box of "Enable URL Filtering" to enable the function. |
| | 2. Enter the URL that is going to be banned. |
| | 3. To Delete the URL on the table, Click the check box in the select item and click the "Delete Selected". If you want to delete all URLs on the table, click "Delete All" to remove all of them. |

Click <Apply Change> at the bottom of the screen to save the above configurations.

Virtual DMZ

The virtual DMZ is used to enable protocols, which need to open ports on the router. The router will forward all unspecified incoming traffic to the host specified in this page.



The screenshot shows a configuration page titled "Virtual DMZ" with a purple background. It contains a descriptive paragraph, a checkbox for "Enable Virtual DMZ", a text input field for "Virtual DMZ Host IP Address:", and two buttons: "Apply Changes" and "Reset".

Virtual DMZ

A Demilitarized Zone is used to provide Internet services without sacrificing unauthorized access to its local private network. Typically, the virtual DMZ host contains devices accessible to Internet traffic, such as Web (HTTP) servers, FTP servers, SMTP (e-mail) servers and DNS servers.

Enable Virtual DMZ

Virtual DMZ Host IP Address:

To configure it, enter the Host IP (private IP address) and Click "Apply changes" to enact the setting.

Management

Status

In the home page of the Wireless Router, the left navigation bar shows the options to configure the system. In the right navigation screen is the summary of system status for viewing the configurations.

SYSTEM	
Uptime	0day:0h:2m:54s
Firmware Version	v1.0

Wireless Configuration	
Mode	AP
Band	2.4 GHz (B+G)
SSID	WLAN-11g-GW
Channel Number	11
Encryption	Disabled
BSSID	00:e0:7d:c0:c7:d1
Associated Clients	0

LAN Configuration	
IP Address	192.168.1.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled
MAC Address	00:e0:7d:c0:c7:d1

WAN Configuration	
Attain IP Protocol	Static IP
IP Address	10.10.10.1
Subnet Mask	255.255.0.0
Default Gateway	10.10.10.254
MAC Address	00:e0:7d:c0:c7:d3

I System

Uptime	The period that you power the device on.
Firmware Version	The version of the firmware applied on this device.

I Wireless Configuration

Mode	The operation mode of the wireless router
Band	The performing band of this wireless router
SSID	The name of this wireless network

Channel Number	The channel used by the wireless LAN. All devices in the same wireless LAN should use the same channel
Encryption	The security encryption status of this wireless network
BSSID	The Basic Service Set Identity of this router.(This parameter is the same as the MAC address of LAN port)
Associated Clients	The number of associated clients.

I LAN Configuration


IP Address	IP Address of router
Subnet Mask	Subnet Mask of the router
DHCP Server	Enabled or Disable of DHCP
MAC Address	MAC Address of LAN-port

I WAN Configuration

Attain IP Protocol	Static IP address
IP Address	IP address of WAN-port
Subnet Mask	Subnet Mask of WAN-port
Default Gateway	Default Gateway of WAN-port
MAC Address	MAC Address of WAN-port

Statistics

On this page, you can monitor the sent & received packets counters of wireless, Ethernet LAN, and Ethernet WAN. To see the latest report, click refresh button.

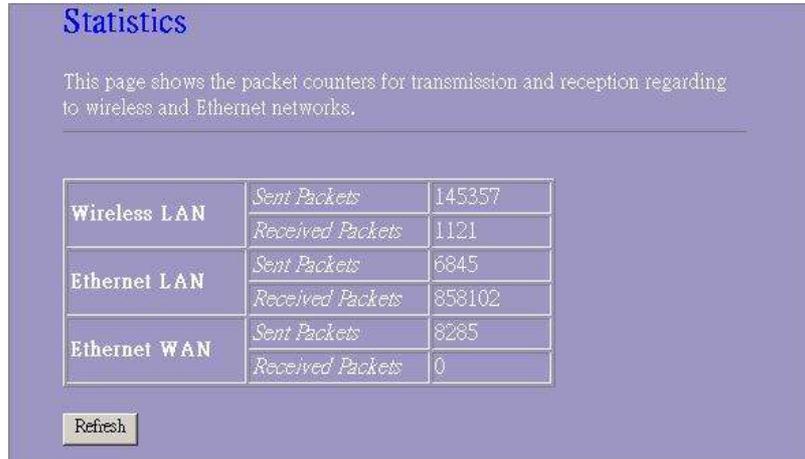


Statistics

This page shows the packet counters for transmission and reception regarding to wireless and Ethernet networks.

Wireless LAN	<i>Sent Packets</i>	145357
	<i>Received Packets</i>	1121
Ethernet LAN	<i>Sent Packets</i>	6845
	<i>Received Packets</i>	858102
Ethernet WAN	<i>Sent Packets</i>	8285
	<i>Received Packets</i>	0

DDNS

This page allows users to connect to DDNS. To enable DDNS, Mark the “Enable DDNS” checkbox. Select the service provider from the drop list. Fill in domain name, username, and password. Click the “Apply Change” button after configuration.

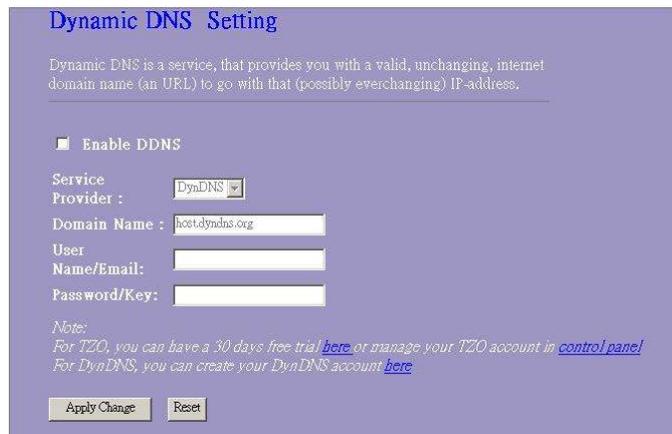

Dynamic DNS Setting

Dynamic DNS is a service, that provides you with a valid, unchanging, internet domain name (an URL) to go with that (possibly everchanging) IP-address.

Enable DDNS

Service Provider :

Domain Name :


User Name/Email:

Password/Key:

Note:
For TZO, you can have a 30 days free trial [here](#) or manage your TZO account in [control panel](#)
For DynDNS, you can create your DynDNS account [here](#)

Time Zone Setting

This page allows users to configure the time of the router. To specify manually, fill in the blanks in “Current Time” and click the “Apply Change” button. To synchronize time from a timeserver, please mark the “Enable NTP client update” checkbox, select a NTP server from the drop list or manually enter a NTP server. Click the “Apply Change” button after your configuration.

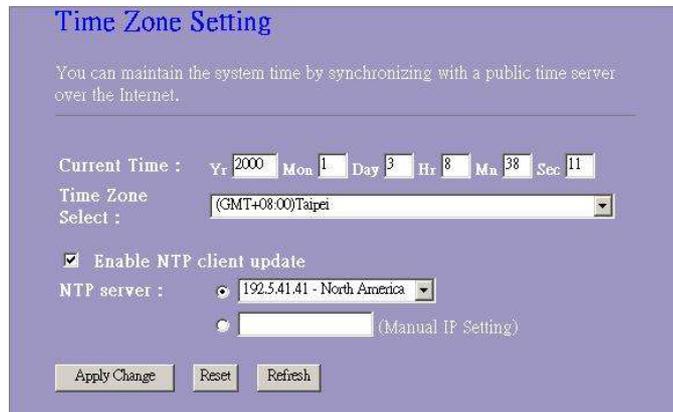

The screenshot shows a web interface titled "Time Zone Setting" with a purple header. Below the title, there is a descriptive text: "You can maintain the system time by synchronizing with a public time server over the Internet." The configuration area includes: "Current Time" with input fields for Year (2000), Month (1), Day (3), Hour (8), Minute (38), and Second (11); "Time Zone" with a dropdown menu set to "(GMT+08:00)Taipei"; a checked checkbox for "Enable NTP client update"; "NTP server" with a radio button selected for "192.541.41 - North America" and another radio button for "(Manual IP Setting)"; and three buttons at the bottom: "Apply Change", "Reset", and "Refresh".

System Log

This System Log page shows the information of the current activities on the router.

To enable system log function:

1. Mark the “Enable Log” checkbox.
2. To see all information of the system, select the “system all” checkbox.
To see wireless information only, select the “wireless” checkbox.
To sent the log information to a certain note, select the “Enable Remote Log” checkbox and fill in the IP address in the “Log Server IP Address” box.
3. Click the “Apply Changes” button to activate

You could also click the “Refresh” button to refresh the log information or click the “clear” button to clean the log table.

System Log

This page can be used to set remote log server and show the system log.

Enable Log
 system all wireless
 Enable Remote Log

Log Server IP Address:
 Server Port: 514

Upgrade Firmware

To Upgrade Firmware,

- | | |
|--------------|--|
| STEPS | <ol style="list-style-type: none"> 1. Click "browse..." button to select the firmware you want to upgrade. <hr style="border-top: 1px dashed black;"/> <ol style="list-style-type: none"> 2. Click Upload to start the upgrade process. Please don't close the WEB-browser and wait for process to complete. When Upgrade is completed, you can start to use the router. |
|--------------|--|

Upgrade Firmware

This page allows you upgrade the Access Point firmware to new version. Please note, do not power off the device during the upload because it may crash the system.

Select File:

Save and Reload Settings

To save setting to file, click “Save...” button.

To load setting from file,

1. Click “Browse...” on the to select the file
2. Click upload to start the process and wait for it to complete

To reset setting to Default, click reset to start the process and it will be completed till the status LED start blinking.

The screenshot shows a web interface titled "Save/Reload Settings" with a purple header. Below the header, there is a paragraph of text: "This page allows you save current settings to a file or reload the settings from the file which was saved previously. Besides, you could reset the current configuration to factory default." Below this text, there are three rows of controls. The first row is labeled "Save Settings to File:" and has a "Save..." button. The second row is labeled "Load Settings from File:" and has a text input field, a "Browse..." button, and an "Upload" button. The third row is labeled "Reset Settings to Default:" and has a "Reset" button.

Password

To set up the Administrator Account information, enter the Username, New password, and reenter the password on the text box. Don't forget to click the “Apply Changes” to save the configuration.

The screenshot shows a web interface titled "Password Setup" with a purple header. Below the header, there is a paragraph of text: "This page is used to set the account to access the web server of Access Point. Empty user name and password will disable the protection." Below this text, there are three rows of text input fields. The first row is labeled "User Name:", the second row is labeled "New Password:", and the third row is labeled "Confirmed Password:". Below these fields, there are two buttons: "Apply Changes" and "Reset".

Product Specifications

Standard	IEEE802.3, 10BASE-T IEEE802.3u, 100BASE-TX IEEE802.3x full duplex operation and flow control IEEE802.11b wireless LAN infrastructure IEEE802.11g wireless LAN infrastructure
Interface	1 * WAN port 4 * 10/100 RJ-45 Fast Ethernet switching ports Antenna: 802.11b/g wireless reverse SMA detachable
WAN Connection	Ethernet 10/100 Mbps
Cable Connections	RJ-45 (10BASE-T): Category 3,4,5 UTP RJ-45 (100BASE-TX): Category 5 UTP
Network Data Rate	802.11b: 1, 2, 5.5 and 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, and 54Mbps
Transmission Mode	Auto-Negotiation (Full-duplex, Half-duplex)
LED indications	System: Power, Status Port (WAN): ACT/LINK Port (LAN): ACT/LINK Port(Wireless): ACT
Security	64/128-bit WEP, WPA(TKIP with IEEE 802.1x), WPA2, AES
Receiver Sensitivity	54Mbps OFDM, 10%PER, -71dBm 11Mbps CCK, 10%PER, -81dBm 1Mbps BPSK, 10%PER, -92dBm
Transmit Power	16dBm~18dBm
Range Coverage	Indoor 35~100 meters Outdoor 100~300meters.
Emission	FCC CLASS B, CE, VCCI Class B
Operating Temperature	0° ~ 40°C (32° ~ 104°F)
Operating Humidity	10% - 90%
Power Supply	External Power Adapter, 12VDC/ 1A