

ESR-9753 Wireless Broadband Router

Quick Start Guide

Connect the supplied power-adaptor to the power inlet port and connect it to a wall outlet. Then, the router automatically enters the self-test phase. During self-test phase, Power LED will blink briefly, and then will be lit continuously to indicate that this product is in normal operation.

CHECK

- A standard CD-ROM drive
- Internet connection should be setup & ready to use (ADSL or cable modem).
- Modem must provide RJ45 port to connect with ESR-9753.
- Microsoft Windows compatible PC/Notebook with UPnP enabled network adapter
- CAT 5 network cable(s), RJ45 port on PC/Notebook.

STEP 1

Connect **ESR-9753 WAN** port & your **modem WAN** port with RJ45 cable.

STEP 2


Power up **ESR-9753**. POWER led on front panel lights up & remains stable.

STEP 3

Connect **ESR-9753 LAN** port & **PC/Notebook RJ45** port with network cable.

STEP 4

Insert **Wizard CD** into your CD-ROM drive and browse it with Windows Explorer.

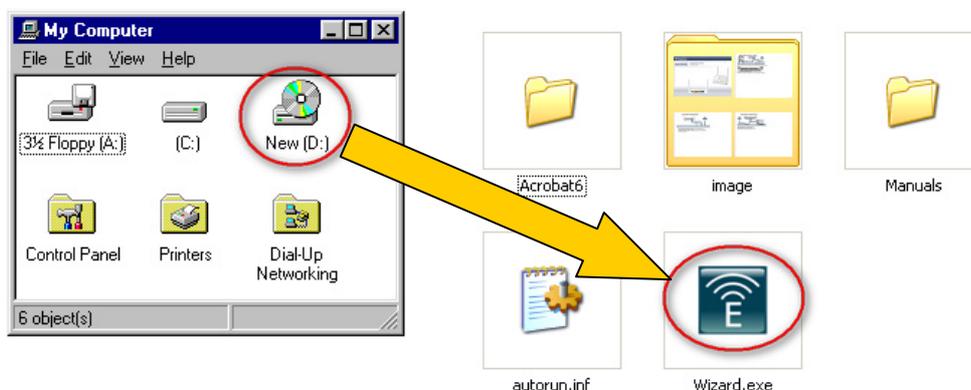

Click on "**Wizard.exe**" to activate SMART WIZARD.



Please click on Setup Wizard and follow the instruction given to complete the device initiation configuration.

Thank you for supporting EnGenius.