

Quick Start Guide


ZYXEL ENGLISH

VMG3625-T20A

Dual-Band Wireless AC/N Combo
WAN Gigabit Gateway with USB


- EN ① Connect the stand with the bracket holes facing up.
② Place the device vertically on a smooth level surface.

Desktop Installation

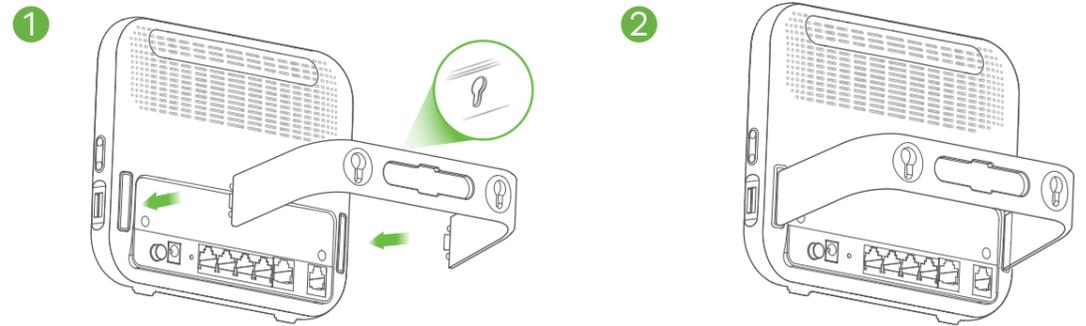


- EN ① Use the gray phone cable to connect the DSL port to a DSL splitter (1-a) or directly to the telephone wall outlet.
OR
Use an Ethernet cable to connect the WAN port to a gateway modem (1-b).
② Connect a computer to the LAN port using the yellow Ethernet cable (optional).
③ Connect a 3G dongle (optional).
④ Connect the power cable to the modem and press the power button.

Hardware Connections

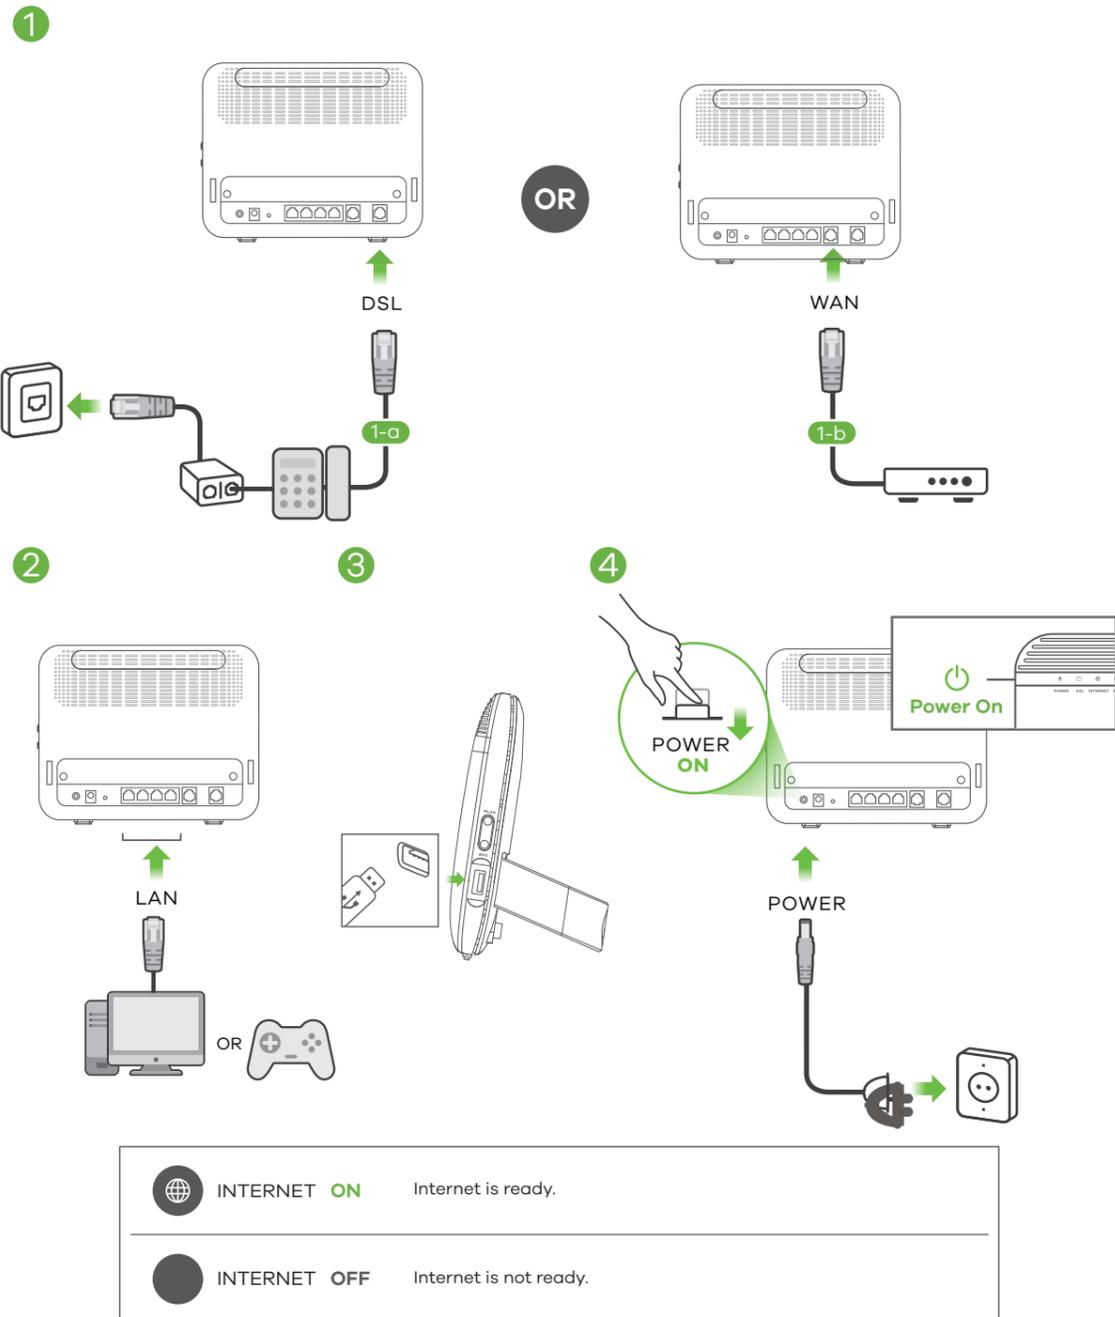


- EN ① The SSID and Wireless key are on the device label.
② On your smartphone or notebook, find this SSID.
Enter the Wireless key to connect.

WiFi Connection / Using SSID

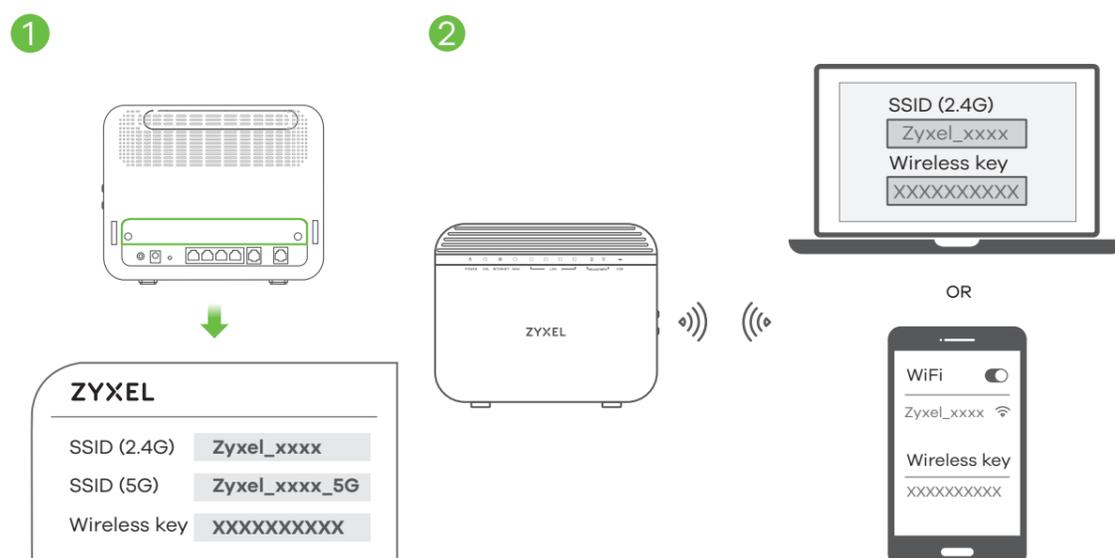


- EN ① Press the WPS button until the WiFi 2.4G and 5G LEDs light up in amber.
- ② Press the WPS button on the client. If the WPS method fails, perform the Using SSID method.

WiFi Connection / Using WPS

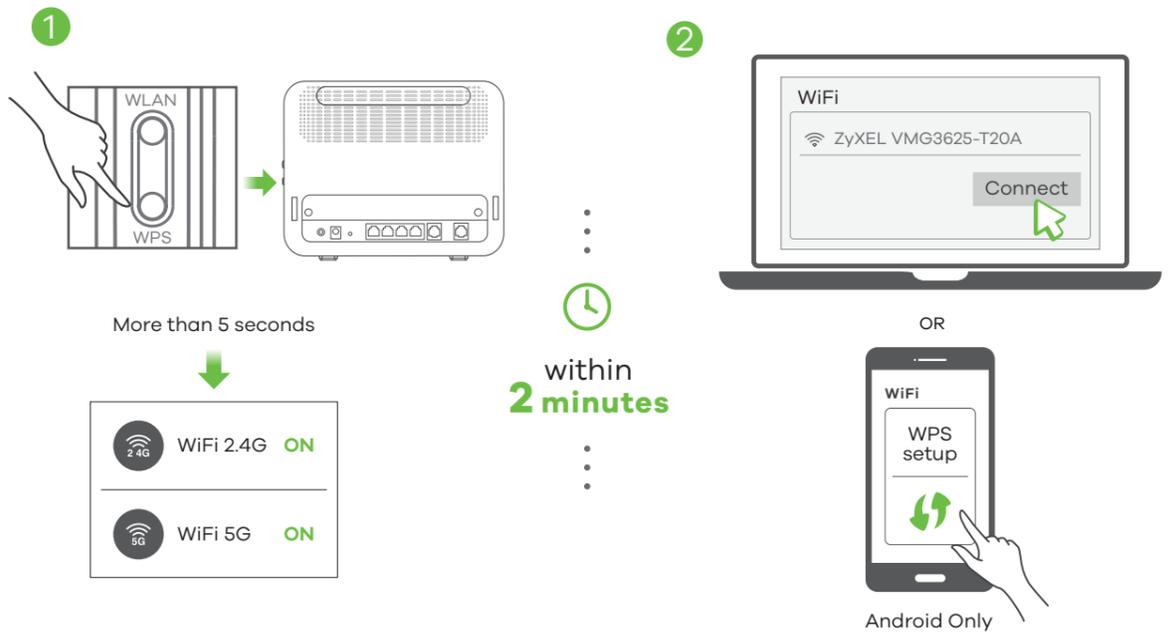

- EN Open a web browser and go to <http://192.168.1.1>. Enter the default **User Name (admin)** and admin login password (on the device label), and then click **Login**. A wizard runs. Follow the wizard prompts to complete the setup.

Quick Start Wizard

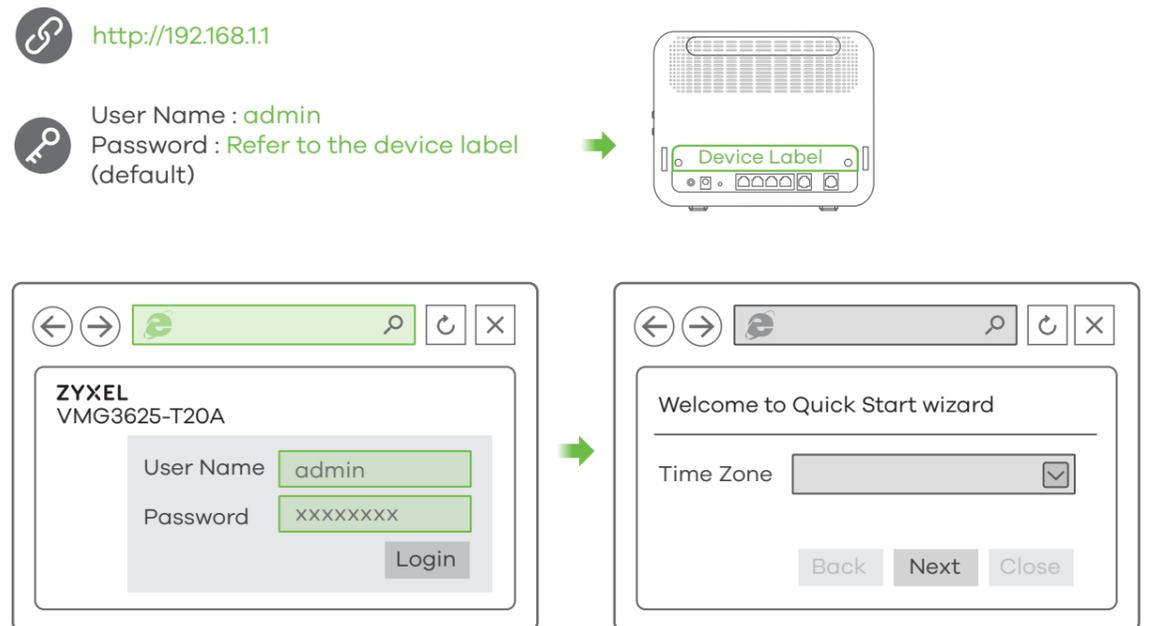

- EN (Optional) Drill two holes at the distance of 105mm apart. Insert screw anchors and screws (not provided) into the holes. Attach the bracket to your VMG3625-T20A with the bracket holes facing down. Hang it on the screws.

Wall Mounting (Optional)

