

Quick Installation Guide

600Mbps Wireless N Router


Suitable for: N600R

V1.1602

Copyrights © TOTOLINK All rights reserved. Website: <http://www.totolink.net>
Information in this document is subject to change without prior notice.

1 Hardware Installation

If you use ADSL Modem to access the Internet, please follow below steps. For houses that there is only one Ethernet cable from the wall, please plug the Ethernet cable to the router's WAN port directly.

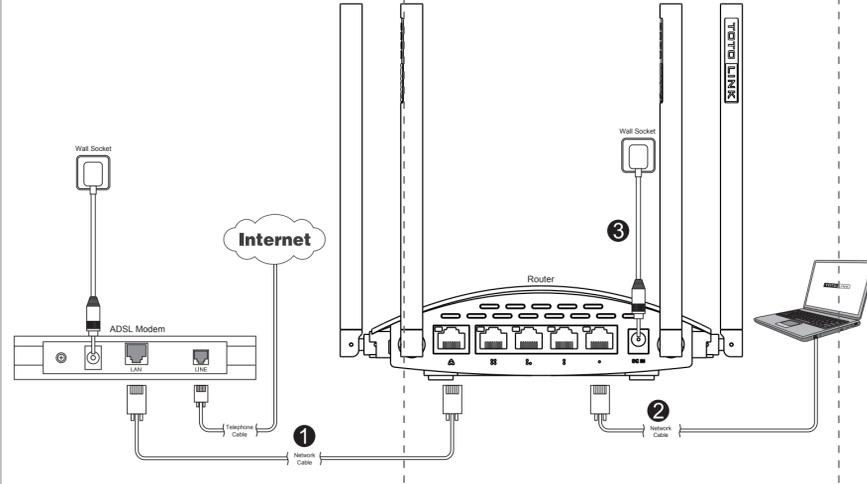

LED Indicators

Status	LED	Description
	Red	The router is working under normal power.
	Green	The Turbo switch is enabled and the router is working under middle power.
	Blink	The router is working normally or resetting.
	Off	Power is off.
WAN	On	The WAN port is connected, the Internet is available.
	Off	The WAN port is not connected, the Internet is unavailable.
LAN	On	There is device connected to LAN port 1/2/3/4.
	Off	No device connected to LAN port 1/2/3/4.

Ports and Buttons Description

DC IN	Connect with the power adapter
WAN	Connect to ADSL modem or Internet Cable
LAN	Connect to PC or Laptop
RSTWPS	Press for 1s, WPS enabled; press for more than 5s, Reset function enabled.
Turbo	Improve the router's working power, extend Wi-Fi coverage.


NOTE:

- Please disconnect the power adapter and all cables during thunderstorm weather;
- Keep away from heat source and keep well ventilated;
- Please pay attention to the waterproofing and moisture-proof when storing, transporting and running.
- The power adapter must be original or approved by TOTOLINK.
- Put the router in flat places.

2 Set Up PC


Windows Vista/7 For Windows Vista or Windows 7 Operating System, please comply with following steps to set up.

- Click **Start—Control Panel—Network and Internet—Network Connection**, right-click **Local Area Connection**, and choose **Properties**.
- Double-click **Internet Protocol Version 4 (TCP/IPv4)**.
- Choose **Obtain an IP address automatically** and **Obtain DNS server address automatically**, click **OK**, and then click **OK**.

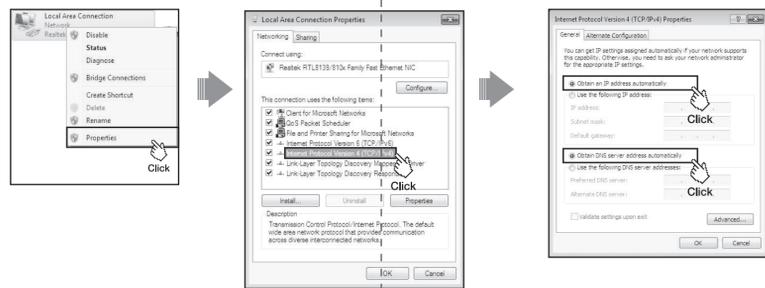

Windows 10 For Windows 10 Operating System, please comply with following steps to set up.

- Click **Start—All apps—Windows System—Control Panel—Network and Sharing Center**, right-click **Local Area Connection**, and choose **Properties**.
- Double-click **Internet Protocol Version 4 (TCP/IPv4)**.
- Choose **Obtain an IP address automatically** and **Obtain DNS server address automatically**, click **OK**, and then click **OK**.

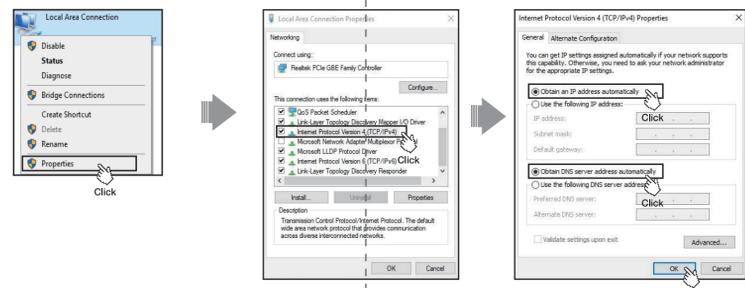

3 Set Up Router

Please set up the router following below steps.


- Run any Web browser.




- The **USER LOGIN** page will pop up automatically. Enter **admin** for both User Name and Password, click **LOGIN**. (The auto pop-up page only for first connection, future Login please enter **'192.168.0.1'** in address bar)



- Now you can see the **Easy Setup** interface.

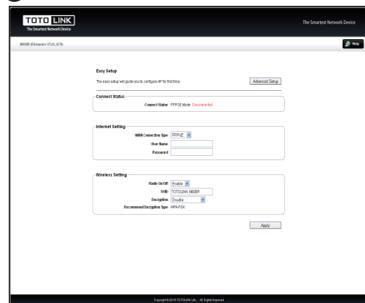

- Choose the **WAN Connection Type** and enter the parameters provided by your **Internet Service Provider**.




- Here we take PPPoE as example. You are required to enter the User Name and Password.



- Wireless Settings, you can change or retain your SSID (wireless network name).



- Choose the encryption type. The **WPA2-PSK** is recommended, then type in your password (password length more than 8 characters). Then click **Apply** to save the Settings.

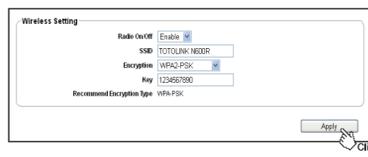


- Wait for a while, Internet connected successfully! Please click **finish**.



- Now the router's Status interface turns up, it shows connected type and IP address & DNS you get.




- Try any website to test the Internet. Here we type in www.totolink.net.

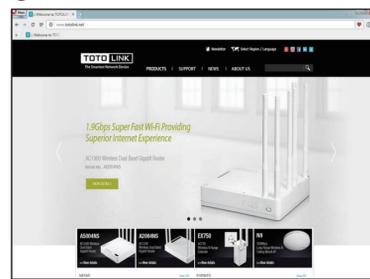

Auto Pop-up Setting page for First Wi-Fi Devices Connection

- Click **Settings—Wi-Fi**.
- Select **TOTOLINK N600R**, no password required by default.
- When connected, the Web page of **TOTOLINK N600R** will pop up automatically.

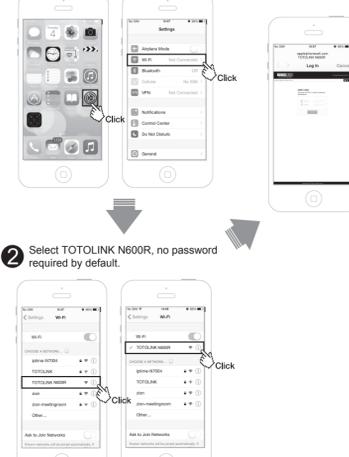

Note: This function is only suitable for iPhone and a few Android smart phones. If the auto pop-up page not turns up on your phone, please use PC to set up your router.

4 FAQ

- How to reset the router to default settings?**

- Please make sure your router's power is on regularly, then press the RSTWPS button for about 5-8s.

- What can I do if I forget the router's Web Login page User Name and Password?**

- Please reset your router to default settings firstly, the default IP address is **192.168.0.1**, both default User Name and Password are **admin**.

- How Turbo switch improve the router's wireless performance?**

- By default, the Turbo switch is on. If you slide the Turbo switch to off, the router's output power will decrease by about 60dBm theoretically, which means your Wi-Fi signal will be weakened as well as the Wi-Fi range. So we recommend you turn it off to reduce radiation only if there is any pregnant women or infants at home.

NOTE:

After you set the Key, please remember your SSID and the Key to connect with your wireless LAN.



WPS: press for about 1-3 seconds, the system LED indicator keep solid light, it means WPS working.
RST: press for about 5-8 seconds, all LEDs blinks quickly, the device will restore to factory default settings.

FCC warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.