



# User Guide

AC900 High Power Wireless Dual Band Router  
Archer C28HP

# Contents

About This Guide .....	1
<b>Chapter 1. Get to Know About Your Router .....</b>	<b>2</b>
1. 1. Product Overview.....	3
1. 2. Panel Layout.....	3
1. 2. 1.Top View .....	3
1. 2. 2.The Back Panel.....	4
<b>Chapter 2. Connect to the Internet .....</b>	<b>6</b>
2. 1. Position Your Router .....	7
2. 2. Connect to the Internet.....	7
2. 2. 1.Install the antennas .....	7
2. 2. 2.Router mode .....	8
2. 2. 3.Range Extender Mode.....	10
2. 2. 4.Access Point Mode.....	11
<b>Chapter 3. Log in.....</b>	<b>13</b>
<b>Chapter 4. Configure the router in Standard Wireless Router .....</b>	<b>15</b>
4. 1. Guest Network.....	16
4. 1. 1.Create a Network for Guests .....	16
4. 1. 2.Customize Guest Network Options .....	16
4. 2. Parental controls .....	17
4. 3. QoS .....	19
4. 4. Network Security .....	21
4. 4. 1.Protect the Network from Cyber Attacks.....	21
4. 4. 2.Access Control.....	23
4. 4. 3.IP & MAC Binding.....	24
4. 5. NAT Forwarding.....	25
4. 5. 1.Share Local Resources on the Internet by Virtual Servers .....	26
4. 5. 2.Open Ports Dynamically by Port Triggering .....	27
4. 5. 3.Make Applications Free from Port Restriction by DMZ.....	28
4. 5. 4.Make Xbox Online Games Run Smoothly by UPnP.....	29
4. 6. VPN Server.....	30
4. 6. 1.Use OpenVPN to Access Your Home Network .....	31

4. 6. 2.	Use PPTP VPN to Access Your Home Network .....	32
4. 7.	Customize Your Network Settings.....	37
4. 7. 1.	Change the LAN Settings.....	37
4. 7. 2.	Set Up Link Aggregation.....	37
4. 7. 3.	Configure to Support IPTV Service .....	38
4. 7. 4.	Specify DHCP Server Settings .....	39
4. 7. 5.	Set Up a Dynamic DNS Service Account.....	41
4. 7. 6.	Create Static Routes .....	41
4. 7. 7.	Specify Wireless Settings .....	43
4. 7. 8.	Use WPS for Wireless Connection.....	45
4. 7. 9.	Schedule Your Wireless Function.....	46
4. 8.	Manage the Router .....	47
4. 8. 1.	Adjust Wi-Fi Coverage.....	47
4. 8. 2.	Set Up System Time.....	47
4. 8. 3.	Test the Network Connectivity.....	49
4. 8. 4.	Upgrade the Firmware.....	50
4. 8. 5.	Backup and Restore Configuration Settings .....	52
4. 8. 6.	Change the Administrator Account .....	53
4. 8. 7.	Password Recovery .....	54
4. 8. 8.	Local Management.....	55
4. 8. 9.	Remote Management .....	56
4. 8. 10.	System Log.....	57
4. 8. 11.	Monitor the Internet Traffic Statistics.....	59
4. 8. 12.	Control LEDs .....	59
 <b>Chapter 5. Configure the Router in Access Point Mode .....</b>		<b>61</b>
5. 1.	Change the working mode .....	62
5. 2.	Guest Network.....	62
5. 2. 1.	Create a Network for Guests .....	62
5. 2. 2.	Customize Guest Network Options .....	63
5. 3.	Parental controls .....	64
5. 4.	Customize your wireless setting .....	66
5. 4. 1.	Specify Wireless Settings .....	66
5. 4. 2.	Use WPS for Wireless Connection.....	67
5. 5.	Customize Your Network.....	68
5. 5. 1.	Change LAN Settings .....	68
5. 5. 2.	Adjust Wi-Fi Coverage.....	69
5. 5. 3.	Set Access Control.....	69

5. 6.	Manage the Router .....	71
5. 6. 1.	Set Up System Time.....	71
5. 6. 2.	Control LEDs.....	72
5. 6. 3.	Power Schedule.....	72
5. 6. 4.	Upgrade the Firmware.....	73
5. 6. 5.	Backup and Restore Configuration Settings .....	74
5. 6. 6.	Change Login Password.....	75
5. 6. 7.	System Log .....	76

## **Chapter 6. Configure the Router in Range Extender Mode ..... 77**

6. 1.	Change the working mode .....	78
6. 2.	Guest Network.....	78
6. 2. 1.	Create a Network for Guests .....	78
6. 2. 2.	Customize Guest Network Options .....	79
6. 3.	Parental controls .....	80
6. 4.	Customize your wireless setting .....	82
6. 4. 1.	Specify Wireless Settings .....	82
6. 4. 2.	Use WPS for Wireless Connection.....	83
6. 5.	Customize Your Network.....	84
6. 5. 1.	Change LAN Settings .....	84
6. 5. 2.	Specify DHCP Server Settings .....	85
6. 5. 3.	Adjust Wi-Fi Coverage.....	86
6. 5. 4.	Set Access Control.....	86
6. 6.	Manage the Router .....	88
6. 6. 1.	Set Up System Time.....	88
6. 6. 2.	Control LEDs.....	89
6. 6. 3.	Upgrade the Firmware.....	89
6. 6. 4.	Backup and Restore Configuration Settings .....	91
6. 6. 5.	Change Login Password.....	92
6. 6. 6.	System Log .....	92

## **FAQ ..... 95**

# About This Guide

This guide is a complement of Quick Installation Guide. The Quick Installation Guide instructs you on quick Internet setup, and this guide provides details of each function and shows you the way to configure these functions appropriate to your needs.

When using this guide, please notice that features of the router may vary slightly depending on the model and software version you have, and on your location, language, and Internet service provider. All screenshots, images, parameters and descriptions documented in this guide are used for demonstration only.

## Conventions

In this guide the following conventions are used:

Convention	Description
<u>Underlined</u>	Underlined words or phrases are hyperlinks. You can click to redirect to a website or a specific section.
Teal	Contents to be emphasized and texts on the web page are in teal, including the menus, items, buttons, etc.
>	The menu structures to show the path to load the corresponding page. For example, <b>Advanced</b> > <b>Wireless</b> > <b>MAC Filtering</b> means the MAC Filtering function page is under the Wireless menu that is located in the Advanced tab.
<b>Note:</b>	Ignoring this type of note might result in a malfunction or damage to the device.
<b>Tips:</b>	Indicates important information that helps you make better use of your device.
symbols on the web page	<ul style="list-style-type: none"><li>✎ click to edit the corresponding entry.</li><li>🗑️ click to delete the corresponding entry.</li><li>🔌 click to enable or disable the corresponding entry.</li><li>🔍 click to view more information about items on the page.</li></ul>

## More Info

The latest software, management app and utility can be found at [Download Center](http://www.tp-link.com/support) at <http://www.tp-link.com/support>.

The Quick Installation Guide can be found where you find this guide or inside the package of the router.

Specifications can be found on the product page at <http://www.tp-link.com>.

A Technical Support Forum is provided for you to discuss our products at <http://forum.tp-link.com>.

Our Technical Support contact information can be found at the [Contact Technical Support](http://www.tp-link.com/support) page at <http://www.tp-link.com/support>.

## Chapter 1

---

# Get to Know About Your Router

---

This chapter introduces what the router can do and shows its appearance.

It contains the following sections:

- [“Product Overview”](#)
- [“Panel Layout”](#)


## 1.1. Product Overview


The TP-LINK router is designed to fully meet the need of Small Office/Home Office (SOHO) networks and users demanding higher networking performance. The powerful antennas ensure continuous Wi-Fi signal to all your devices while boosting widespread coverage throughout your home, the built-in Ethernet ports supply high-speed connection to your wired devices, and the flexible working modes are capable to meet all your network needs.

Moreover, it is simple and convenient to set up and use the TP-LINK router due to its intuitive web interface and the powerful Tether app.

## 1.2. Panel Layout

### 1.2.1. Top View

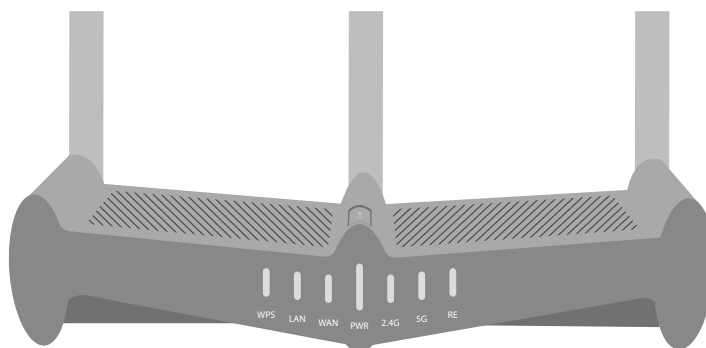

 **RE button:** The button for the Range Extender mode. Press and hold it for about 3 seconds to change to the Range Extender mode.

The router's LEDs (view from left to right) are located on the front panel. You can check the router's working status by following the LED Explanation table.


### LED Explanation

Name	Status	Indication
WPS	On/Off	Turns on when WPS connection is established, and goes off about 5 minutes later.
	Blinking	A wireless device is trying to connect to the network via WPS. This process may take up to 2 minutes.
LAN	On	There is at least one device connects to the LAN ports.
	Off	No connection.

## LED Explanation

Name	Status	Indication
WAN	Blue On	The Internet is available.
	Orange On	The router's WAN port is connected, but the Internet is not available.
	Off	The router's WAN port is not connected.
PWR	On	System initialization completes.
	Blinking	System initialization or firmware upgrade is in progress. Do not disconnect or power off the router.
	Off	Power is off.
2.4G/5G	On	The corresponding wireless function (2.4G/5G) is working properly.
	Off	The corresponding wireless function (2.4G/5G) is disabled.
RE	Blinking	The router is connecting to the host network. This process will last in the first 2 minutes.
	On	The router has been successfully connected to the host network, and it is working in Range Extender mode.

### 1.2.2. The Back Panel

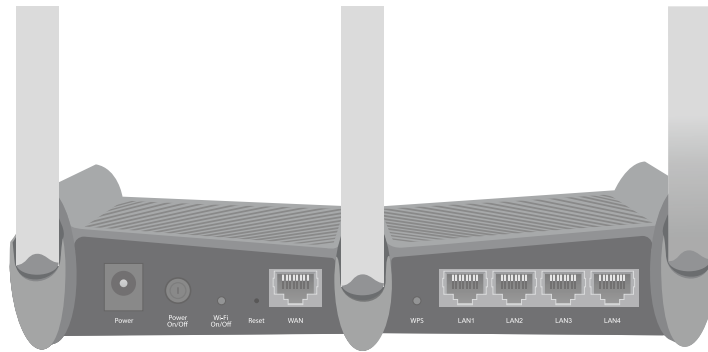

The following parts (view from left to right) are located on the rear panel.

Item	Description
Power Port	For connecting the router to a power socket via the provided power adapter.
Power On/Off	For powering on or off the router.
Wi-Fi On/Off	Press and hold this button about 2 seconds to enable or disable Wireless function.
Reset Button	Use a pin to press and hold this button until all the LED turn on momentarily to reset the router to its factory default settings.
WAN Port	For connecting to a DSL/Cable modem, or an Ethernet port.



Item	Description
WPS	If your clients, such as wireless adapters, that support Wi-Fi Protected Setup, then you can press this button to quickly establish a connection between the router and clients and automatically configure wireless security for your wireless network. The wireless security will be automatically configured for your wireless network.
Ethernet Ports (1/2/3/4)	For connecting your PCs or other wired network devices to the router.
Antennas	Used for wireless operation and data transmitting. Upright them for the best Wi-Fi performance.

## Chapter 2

---

# Connect to the Internet

---

This chapter contains the following sections:

- ["Position Your Router"](#)
- ["Connect to the Internet"](#)


## 2. 1. Position Your Router

- The product should not be located in a place where it will be exposed to moisture or excessive heat.
- Place the router in a location where it can be connected to multiple devices as well as to a power source.
- Make sure the cables and power cord are safely placed out of the way so they do not create a tripping hazard.
- The router can be placed on a shelf or desktop.
- Keep the router away from strong devices with strong electromagnetic interference, such as Bluetooth devices, cordless phones and microwaves.

## 2. 2. Connect to the Internet

### 2. 2. 1. Install the antennas

Please install the Antennas first by following the steps shown below before your start to use the router.

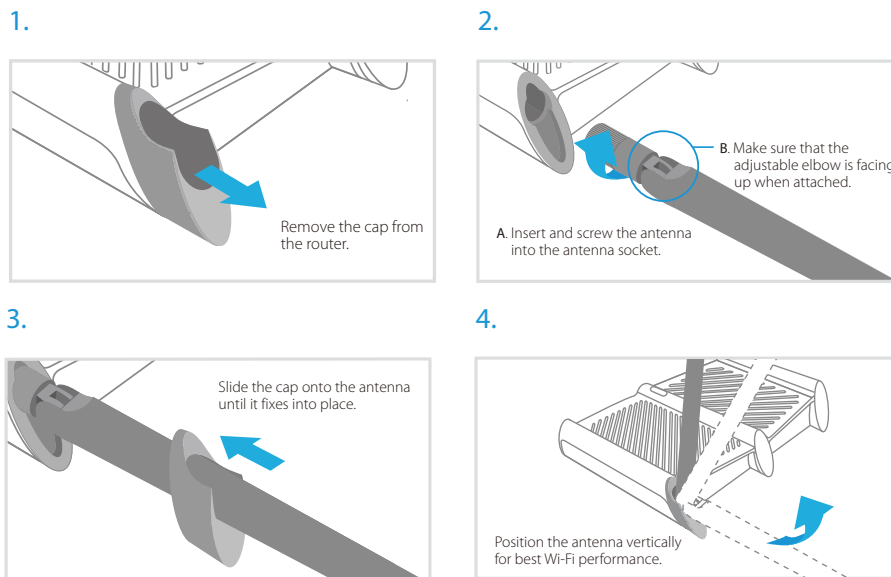


The Router provides three working modes: Router, Range Extender and Access Point. You can choose the mode to better suit your network needs and follow the guide to complete the configuration.

### 2.2.2. Router mode

This mode enables multiple users to share Internet connection via ADSL/Cable Modem.

1. Follow the steps below to connect your router.

If your Internet connection is through an Ethernet cable from the wall instead of through a DSL / Cable / Satellite modem, connect the Ethernet cable directly to the router's WAN port, and then follow Step 4 and 5 to complete the hardware connection.

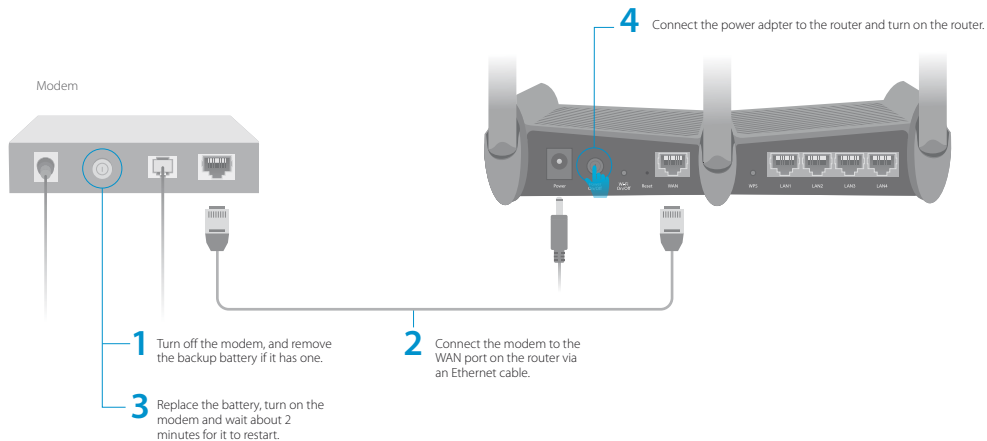

- 1) Turn off the modem, and remove the backup battery if it has one.
- 2) Connect the modem to the WAN port on your router with an Ethernet cable.
- 3) Turn on the modem, and then wait about **2 minutes** for it to restart.
- 4) Connect the power adapter to the router and turn on the router.
- 5) Verify that the hardware connection is correct by checking these LEDs.




☞ **Tips:** If 2.4G or 5G LED is off, press and hold the Wi-Fi On/Off button until it is on.

2. Connect your computer to the router.


#### • Method 1: Wired

Turn off the Wi-Fi on your computer and connect the devices as shown below.

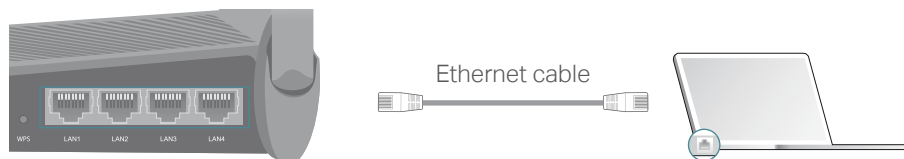

#### • Method 2: Wirelessly

- 1) Find the SSID (Network Name) and Wireless Password printed on the label at the bottom of the router.
- 2) Click the network icon of your computer or go to Wi-Fi Settings of your smart device, and then select the SSID to join the network.

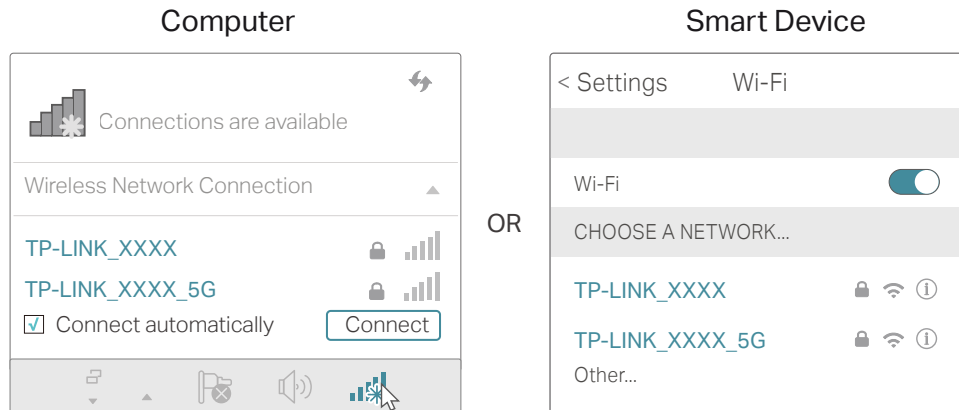


• **Method 3: Use the WPS button**

Wireless devices that support WPS, including Android phones, tablets, most USB network cards, can be connected to your router through this method ( Not supported by iOS devices).

**Note:**


The WPS function cannot be configured if the wireless function of the router is disabled. Also, the WPS function will be disabled if your wireless encryption is WEP. Please make sure the wireless function is enabled and is configured with the appropriate encryption before configuring the WPS.

- 1) Tab the WPS icon on the device's screen.
- 2) Immediately press the WPS button on your router.

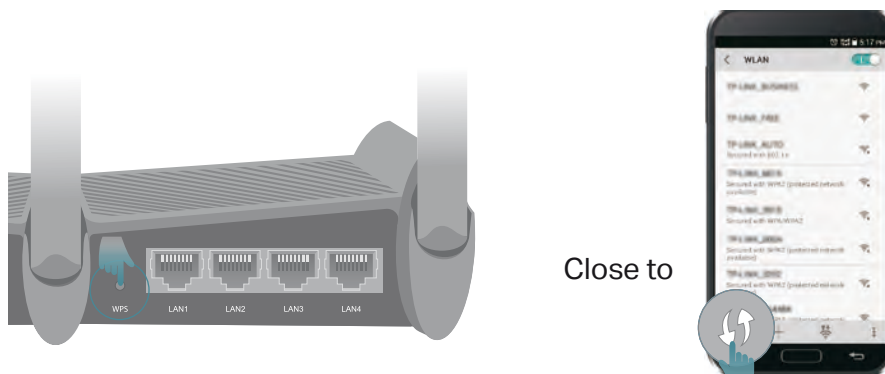

3. Enter <http://tplinkwifi.net> in the address bar of a web browser. Use **admin** for password, and then click **Login**.



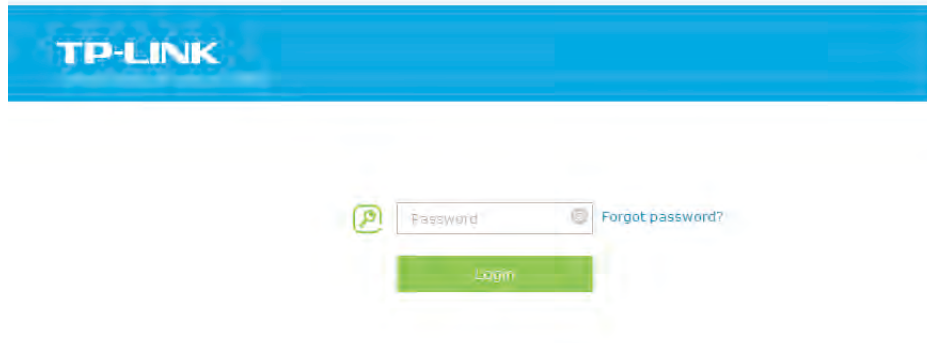


**Note:**

If the above screen does not pop-up, it means that your IE Web-browser has been set to a proxy. Go to Tools menu > Internet Options > Connections > LAN Settings, in the screen that appears, cancel the Using Proxy checkbox, and click OK to finish it.

4. After successfully login, follow [Quick Setup](#) to complete the configuration.
5. **Enjoy!** For wireless devices, you may have to reconnect to the wireless network if you have customized the SSID (wireless name) and password during the configuration.

### 2.2.3. Range Extender Mode

This mode boosts your home wireless coverage.

1. **Configure:** Using RE Button is an easy way to extend your host network. We recommend you to use this way if your host router has the WPS button. The button might look like these: 

- **Option One: Using RE Button**


- 1) Press the WPS button on the host router.
- 2) Press and hold the **RE button** on the top panel of router for about 3 seconds within 1 minute. The router will start to reboot.
- 3) After rebooted, the **RE LED** should change from blinking to a solid state, indicating a successful connection.

**Note:** If not, please refer to the Option Two.

- **Option Two: Using Web Browser**

- 1) Connect a computer to the router via an Ethernet cable or wirelessly by using the SSID (wireless name) and password printed on the bottom label of the router.
- 2) Enter <http://tplinkwifi.net> in the address bar of a web browser. Use **admin** for both username and password, and then click **Login**.




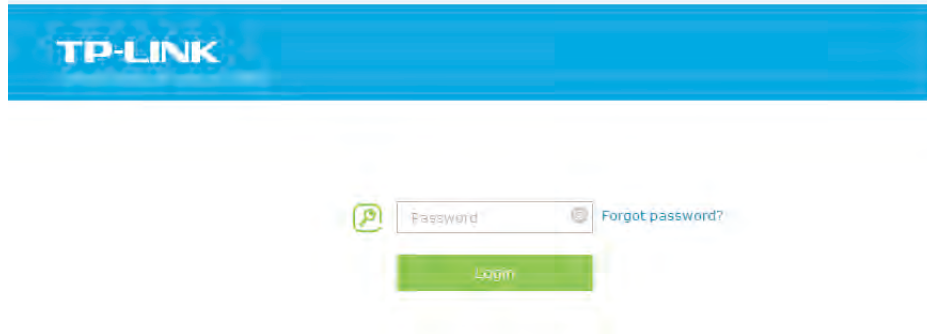

- 3) After successfully login, select **Range Extender** mode and follow **Quick Setup** to complete the configuration.

🔗 Tips: Click **Survey** to choose your host network and fill in its wireless password.


2. **Relocate**: Place the router between your host router and the Wi-Fi dead zone. The location you choose must be within the range of your existing host network.

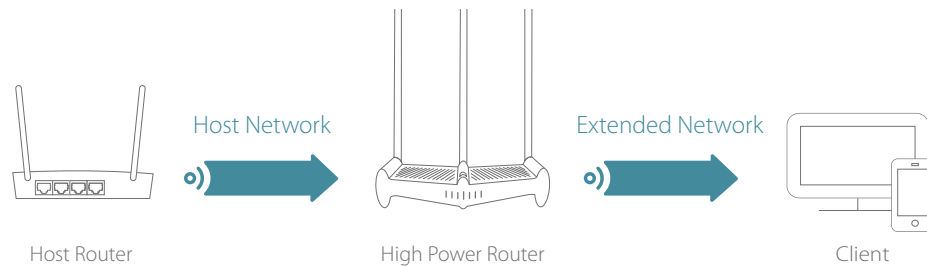

3. **Enjoy!** The extended network shares the same SSID (wireless name) and password as your host network.


#### 2. 2. 4. Access Point Mode

This mode transforms your existing wired network to a wireless network.

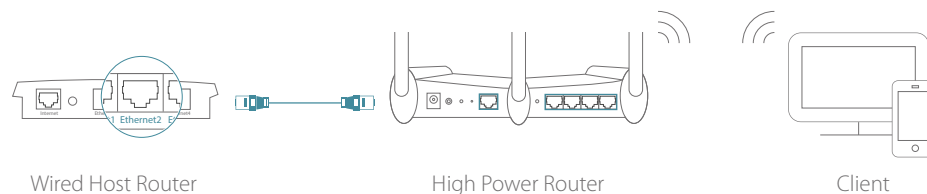

1. Turn on the router.
2. Connect the router to your wired host router's Ethernet port via an Ethernet cable as shown above.
3. Connect a computer to the router via an Ethernet cable or wirelessly by using the SSID (network name) and password printed on the bottom label of the router.

4. Enter <http://tplinkwifi.net> in the address bar of a web browser. Use [admin](#) for password, and then click [Login](#).

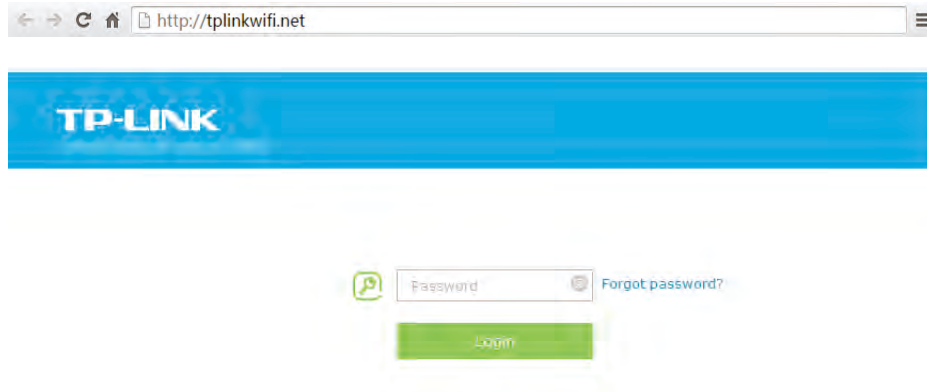

**Note:**

If the above screen does not pop-up, it means that your IE Web-browser has been set to a proxy. Go to [Tools menu > Internet Options > Connections > LAN Settings](#), in the screen that appears, cancel the Using Proxy checkbox, and click OK to finish it.

5. After successfully login, Click [Mode button](#) in the top-right corner of the web management page and choose [Access Point](#) and then click [Save](#). The router will reboot automatically.

**Note:**

If you want to change the default SSID (network name) and the password, please follow Quick Setup to complete the configuration.

6. [Enjoy!](#) Connect to the wireless network by using the SSID (wireless name) and password of the router.



## Chapter 3

---

# Log in


---

This chapter shows how to log in to the web management page of router.

With the web-based utility, it is easy to configure and manage the router. The web-based utility can be used on any Windows, Macintosh or UNIX OS with a Web browser, such as Microsoft the Internet Explorer, Mozilla Firefox or Apple Safari.

Follow the steps below to log in to your router.

1. Set up the TCP/IP Protocol in [Obtain an IP address automatically](#) mode on your computer.
2. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router. The default one is [admin](#) (all lowercase) for both username and password.

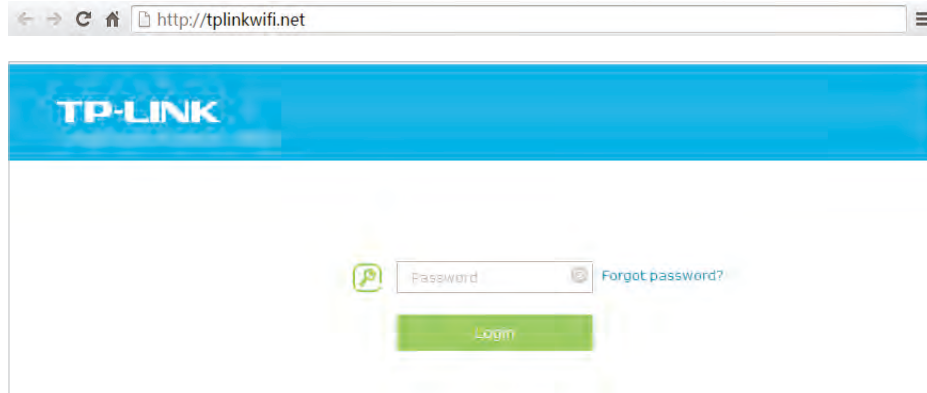

**Note:**

If the login window does not appear, please refer to the ["FAQ"](#) section.

## Chapter 4

---

# Configure the router in Router Mode

---

This chapter presents how to configure the various features of the router working as a standard wireless router.

It contains the following sections:


- ["Guest Network"](#)
- ["Parental controls"](#)
- ["QoS"](#)
- ["Network Security"](#)
- ["NAT Forwarding"](#)
- ["VPN Server"](#)
- ["Customize Your Network Settings"](#)
- ["Manage the Router"](#)

## 4. 1. Guest Network

This function allows you to provide Wi-Fi access for guests without disclosing your main network. When you have guests in your house, apartment, or workplace, you can create a guest network for them. In addition, you can customize guest network options to ensure network security and privacy.

### 4. 1. 1. Create a Network for Guests

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Guest Network](#). Locate the [Wireless](#) section.
3. Create a guest network as needed.
  - 1) Enable [Guest network](#).
  - 2) Customize the SSID. Do not select [Hide SSID](#) unless you want your guests to manually input the SSID for guest network access.
  - 3) Select the [Security](#) type.
    - If [No security](#) is selected, no password is needed to access your guest network.
    - If [WAP/WPA2-Personal](#) is selected, keep the default [Version](#) and [Encryption](#) values, and customize your own password.

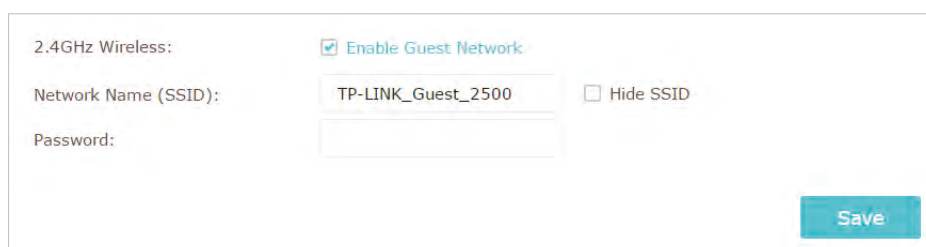

2.4GHz Wireless:  Enable Guest Network

Network Name (SSID):   Hide SSID

Password:

[Save](#)

4. Click [Save](#). Now your guests can access your guest network using the SSID and password you set!

#### Tips:

To view guest network information, go to [Advanced](#) > [Status](#) and locate the [Guest Network](#) section.

### 4. 1. 2. Customize Guest Network Options

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Guest Network](#). Locate the [Settings](#) section.
3. Customize guest network options according to your needs.



- [Allow guests to see each other](#)

Check this box if you want to allow the wireless clients on your guest network to communicate with each other via methods such as network neighbors and Ping.

- [Allow guests to access my local network](#)

Check this box if you want to allow the wireless clients on your guest network to communicate with the devices connected to your router's LAN ports or main network via methods such as network neighbors and Ping.

4. Click [Save](#). Now you can ensure network security and privacy!

 **Tips:**

To view guest network information, go to [Advanced](#) > [Status](#) and locate the [Guest Network](#) section.

## 4.2. Parental controls

This function allows you to block inappropriate, explicit and malicious websites, and control access to specified websites at specified time.

### I want to:

Control the times of day my children or other home network users are allowed to access the Internet and even types of websites they can visit.

*For example,* I want to allow my children's devices (e.g. a computer or a tablet) to access only [www.tp-link.com](http://www.tp-link.com) and [Wikipedia.org](http://Wikipedia.org) from 18:00 (6PM) to 22:00 (10PM) at the weekend and not other times.

### How can I do that?

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Parental Controls](#) and enable [Parental Controls](#).



- Click **Add**. And then Click **View Existing Devices**, and select the access device. Or, input the **Device Name** and **MAC Address** manually.

Devices Under Parental Controls

+ Add - Delete

<input type="checkbox"/>	ID	Device Name	MAC Address	Internet Access Time	Description	Status	Modify
<input type="checkbox"/>	1	PC1	C0-4A-00-1A-C3-46				

Device Name:  **View Existing Devices**

MAC Address:

Internet Access Time:

Description:  (Optional)

**Enable This Entry**

**Cancel** **OK**

- Click the icon to set the Internet Access Time. Drag the cursor over the appropriate cell(s) and click **OK**.

System Time: Sat 25th Jun 2016 02:31:34 undefined

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
00:00							
01:00							
02:00							
03:00							
04:00							
05:00							
06:00							
07:00							
08:00							
09:00							
10:00							
11:00							
12:00							
13:00							
14:00							
15:00							
16:00							
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
24:00							

Time

**Cancel** **Reset** **Save**

- Enter a **Description** for the entry, check the box for **Enable This Entry**, and then click **OK**.
- Select **Whitelist** as the restriction policy.

**Tips:**

- With **Blacklist** selected, the controlled devices cannot access any websites containing the specified keywords during the Internet Access Time period.
- With **Whitelist** selected, the controlled devices can only access websites containing the specified keywords during the Internet Access Time period.

7. Click **+ Add a New Domain Name** . Enter a website and click **Save**.

You can add up to 32 keywords for either Blacklist or Whitelist. Below are some sample entries to allow access.

- **For Whitelist:** Enter a web address (e.g. wikipedia.org) to allow access only to its related websites. If you wish to block all Internet browsing access, do not add any keyword to the **Whitelist**.
- **For Blacklist:** Specify a web address (e.g. wikipedia.org), a web address keyword (e.g. wikipedia) or a domain suffix (eg. .edu or .org) to block access only to the websites containing that keyword or suffix.

**Done!**

Now you can control your children's Internet access as needed.

## 4.3. QoS

QoS (Quality of Service) is designed to ensure the efficient operation of the network when come across network overload or congestion.

**I want to:**

Specify priority levels for some devices or applications.

**For example,** I have several devices that are connected to my wireless network. I would like to set an intermediate speed on the Internet for my phone.

**How can I do that?**

1. Enable QoS and set bandwidth allocation.
  - 1) Visit <http://tplinkwifi.net>, and log in with password you set for the router.
  - 2) Go to **Advanced > QoS**.

- 3) Select [Enable QoS](#).
- 4) Input the maximum upload and download bandwidth provided by your Internet service provider. 1Mbps equal s to 1000Kbps.
- 5) Click [Advanced](#) and drag the scroll bar to set the bandwidth priority percentage.
- 6) Click [Save](#).

QoS

QoS:  [Enable QoS](#)

Upload Bandwidth: 1000 Mbps

Download Bandwidth: 1000 Mbps

[Advanced](#)

High Priority: 60%

Middle Priority: 30%

Low Priority: 10%

[Save](#)

2. Add a middle priority QoS rule for the phone.

- 1) Click [Add](#) in Qos Rule List section.

QoS Rule List

High Priority:60%	Middle Priority:30%	Low Priority:10%
<a href="#">Add</a>	<a href="#">Add</a>	<a href="#">Add</a>

- 2) Click [View Existing Devices](#).

QoS Rule

Type:  [By Device](#)


Device Name:  [View Existing Devices](#)

MAC Address:

[Cancel](#) [OK](#)



3) Choose the respective device from the list.

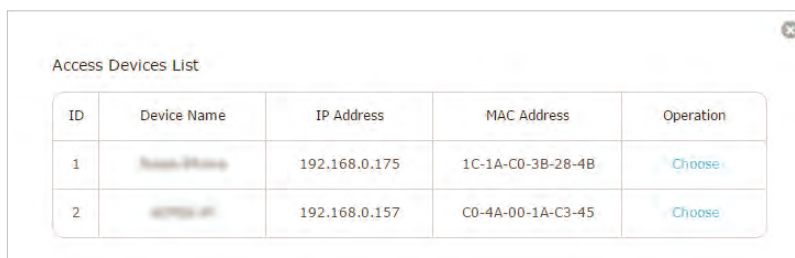

ID	Device Name	IP Address	MAC Address	Operation
1	192.168.0.175	192.168.0.175	1C-1A-C0-3B-28-4B	Choose
2	192.168.0.157	192.168.0.157	C0-4A-00-1A-C3-45	Choose

4) Click **OK**.



QoS Rule

Type:  By Device

Device Name: 192.168.0.175 View Existing Devices

MAC Address: 74-D4-35-98-42-A8

Cancel OK

3. Refer to the steps above to apply other QoS rules if any.

Note:

If you want to delete a QoS rule, click  to remove the responding rule from the list.

**Done!**

Now QoS is implemented to prioritize Internet traffic.

## 4. 4. Network Security

This chapter guides you on how to protect your home network from cyber attacks and unauthorized users by implementing these three network security functions. You can protect your home network against DoS (Denial of Service) attacks from flooding your network with server requests using DoS Protection, block or allow specific client devices to access your network using Access Control, or you can prevent ARP spoofing and ARP attacks using IP & MAC Binding.

### 4. 4. 1. Protect the Network from Cyber Attacks

The SPI (Stateful Packet Inspection) Firewall and DoS (Denial of Service) Protection protect the router from cyber attacks.

The SPI Firewall can prevent cyber attacks and validate the traffic that is passing through the router based on the protocol. This function is enabled by default, and it's recommended to keep the default settings.

DoS Protection can protect your home network against DoS attacks from flooding your network with server requests. Follow the steps below to configure DoS Protection.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Security](#) > [Settings](#).

3. Enable [DoS Protection](#).
4. Set the level ([Off](#), [Low](#), [Middle](#) or [High](#)) of protection for [ICMP-FLOOD Attack Filtering](#), [UDP-FLOOD Attack Filtering](#) and [TCP-SYN-FLOOD Attack Filtering](#).
  - [ICMP-FLOOD Attack Filtering](#) - Enable to prevent the ICMP (Internet Control Message Protocol) flood attack.
  - [UDP-FLOOD Attack Filtering](#) - Enable to prevent the UDP (User Datagram Protocol) flood attack.
  - [TCP-SYN-FLOOD Attack Filtering](#) - Enable to prevent the TCP-SYN (Transmission Control Protocol-Synchronize) flood attack.

**Tips:**

The level of protection is based on the number of traffic packets. The protection will be triggered immediately when the number of packets exceeds the preset threshold value (the value can be set on [Advanced](#) > [System Tools](#) > [System Parameters](#) > [DoS Protection Level Settings](#)), and the vicious host will be displayed in the [Blocked DoS Host List](#).

<input type="checkbox"/>	ID	IP Address	MAC Address
--	--	--	--

5. If you want to ignore the ping packets from the WAN port, select [Ignore Ping Packet From WAN Port](#); if you want to ignore the ping packets from the LAN port, select [Ignore Ping Packet From LAN Port](#).
6. Click [Save](#).

## 4.4.2. Access Control

Access Control is used to block or allow specific client devices to access your network (via wired or wireless) based on a list of blocked devices (Blacklist) or a list of allowed devices (Whitelist).

**I want to:** Block or allow specific client devices to access my network (via wired or wireless).

**How can I do that?**

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Advanced-Settings](#) > [Access Control](#).
3. Enable [Access Control](#).




Access Control

Access Control:

4. Select the access mode to either block (recommended) or allow the device(s) in the list.

**To block specific device(s)**

- 5) Select [Blacklist](#) and click [Save](#).

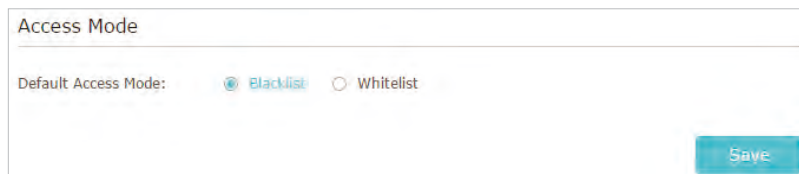


Access Mode

Default Access Mode:  [Blacklist](#)  [Whitelist](#)

[Save](#)

- 6) Select the device(s) to be blocked in the [Online Devices](#) table by ticking the box.
- 7) Click [Block](#) above the [Online Devices](#) table. The selected devices will be added to [Devices in Blacklist](#) automatically.

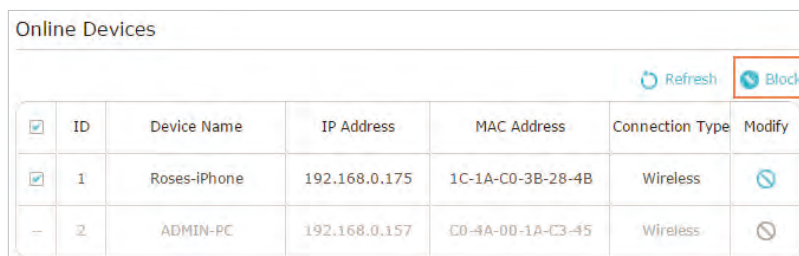

Online Devices

[Refresh](#) [Block](#)

<input checked="" type="checkbox"/>	ID	Device Name	IP Address	MAC Address	Connection Type	Modify
<input checked="" type="checkbox"/>	1	Roses-iPhone	192.168.0.175	1C-1A-C0-3B-28-4B	Wireless	<a href="#">Block</a>
<input type="checkbox"/>	2	ADMIN-PC	192.168.0.157	C0-4A-00-1A-C3-45	Wireless	<a href="#">Block</a>

**To allow specific device(s)**

- 1) Select [Whitelist](#) and click [Save](#).

- 2) Click **Add** in the **Devices in Whitelist** section. Enter the **Device Name** and **MAC Address** (You can copy and paste the information from the **Online Devices** list if the device is connected to your network).

ID	Device Name	MAC Address	Modify
—	—	—	—

- 3) Click **OK**.

**Done!**

Now you can block or allow specific client devices to access your network (via wired or wireless) using the **Blacklist** or **Whitelist**.

### 4. 4. 3. IP & MAC Binding

IP & MAC Binding, namely, ARP (Address Resolution Protocol) Binding, is used to bind network device's IP address to its MAC address. This will prevent ARP Spoofing and other ARP attacks by denying network access to an device with matching IP address in the Binding list, but unrecognized MAC address.

**I want to:**


Prevent ARP spoofing and ARP attacks.

**How can I do that?**

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > Security > IP & MAC Binding**.
3. Enable **ARP Binding**.


4. Bind your device(s) according to your need.

**To bind the connected device(s):**

Click  to add the corresponding device to the **Binding List**.

**To bind the unconnected device**

1) Click **Add** in the **Binding List** section.

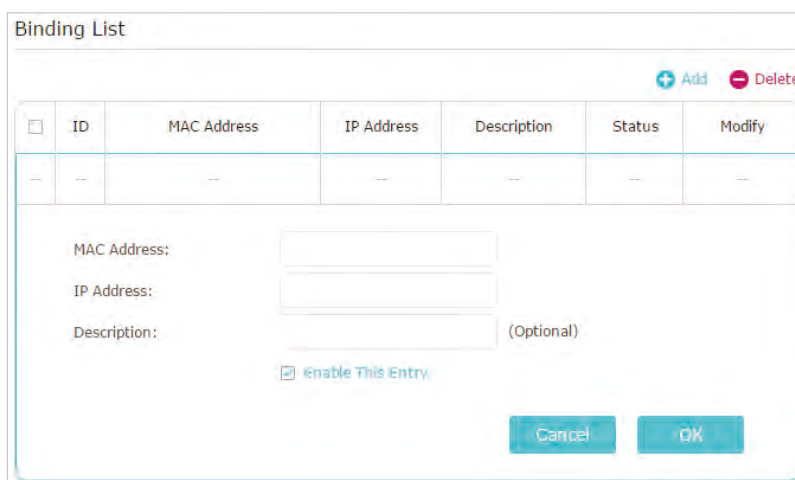

The screenshot shows a 'Binding List' window. At the top right, there are '+ Add' and '- Delete' buttons. Below is a table with the following columns: ID, MAC Address, IP Address, Description, Status, and Modify. The table currently contains one row with dashes in each cell. Below the table, there are three input fields: 'MAC Address:', 'IP Address:', and 'Description: (Optional)'. There is a checkbox labeled 'Enable This Entry' and two buttons at the bottom: 'Cancel' and 'OK'.

2) Enter the **MAC address** and **IP address** that you want to bind. Enter a **Description** for this binding entry.

3) Check the box for **Enable This Entry** and click **OK**.

**Done!**

Now you don't need to worry about ARP spoofing and ARP attacks!

## 4.5. NAT Forwarding

The router's NAT (Network Address Translation) feature makes devices on the LAN use the same public IP address to communicate with devices on the Internet, which protects the local network by hiding IP addresses of the devices. However, it also brings about the problem that an external host cannot initiatively communicate with a specified device on the local network.

With the forwarding feature the router can penetrate the isolation of NAT and allows devices on the Internet to initiatively communicate with devices on the local network, thus realizing some special functions.

The TP-LINK router supports four forwarding rules. If two or more rules are set, the priority of implementation from high to low is Virtual Servers, Port Triggering, UPNP and DMZ.

### 4.5.1. Share Local Resources on the Internet by Virtual Servers

When you build up a server on the local network and want to share it on the Internet, Virtual Servers can realize the service and provide it to Internet users. At the same time


Virtual Servers can keep the local network safe as other services are still invisible from the Internet.

Virtual Servers can be used for setting up public services on your local network, such as HTTP, FTP, DNS, POP3/SMTP and Telnet. Different services use different service ports. Port 80 is used in HTTP service, port 21 in FTP service, port 25 in SMTP service and port 110 in POP3 service. Please verify the service port number before the configuration.

### I want to:

Share my personal website I've built in local network with my friends through the Internet.

For example, the personal website has been built on my home PC (192.168.0.100). I hope that my friends on the Internet can visit my website in some way. The PC is connected to the router with the WAN IP address 218.18.232.154.

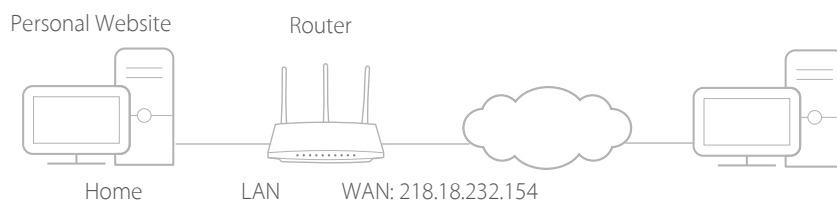

### How can I do that?

1. Assign a static IP address to your PC, for example 192.168.0.100.
2. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
3. Go to **Advanced > NAT Forwarding > Virtual Servers**.
4. Click **Add**. Click **View Existing Services** and select **HTTP**. The **External Port**, **Internal Port** and **Protocol** will be automatically filled in. Enter the PC's IP address 192.168.0.100 in the **Internal IP** field.
5. Click **OK**.

**Tips:**

- It is recommended to keep the default settings of **Internal Port** and **Protocol** if you are not clear about which port and protocol to use.
- If the service you want to use is not in the **Service Type**, you can enter the corresponding parameters manually. You should verify the port number that the service needs.
- You can add multiple virtual server rules if you want to provide several services in a router. Please note that the **External Port** should not be overlapped.

## Done!

Users on the Internet can enter [http:// WAN IP](http://WAN IP) (in this example: [http:// 218.18.232.154](http://218.18.232.154)) to visit your personal website.

**Tips:**

- The WAN IP should be a public IP address. For the WAN IP is assigned dynamically by the ISP, it is recommended to apply and register a domain name for the WAN referring to [Set Up a Dynamic DNS Service Account](#). Then users on the Internet can use [http:// domain name](http://domain name) to visit the website.
- If you have changed the default **External Port**, you should use [http:// WAN IP: External Port](http://WAN IP: External Port) or [http:// domain name: External Port](http://domain name: External Port) to visit the website.

### 4. 5. 2. Open Ports Dynamically by Port Triggering

Port Triggering can specify a triggering port and its corresponding external ports. When a host on the local network initiates a connection to the triggering port, all the external ports will be opened for subsequent connections. The router can record the IP address of the host. When the data from the Internet return to the external ports, the router can forward them to the corresponding host. Port Triggering is mainly applied to online games, VoIPs, video players and common applications including MSN Gaming Zone, Dialpad and Quick Time 4 players and more.

Follow the steps below to configure the Port Triggering rules:

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [NAT Forwarding](#) > [Port Triggering](#) and click [Add](#).
3. Click [View Existing Applications](#), and select the desired application. The [External Port](#), [Internal Port](#) and [Protocol](#) will be automatically filled in. The following picture takes application [MSN Gaming Zone](#) as an example.
4. Click [OK](#).

Port Triggering

+ Add - Delete

<input type="checkbox"/>	ID	Application	Triggering Port	Triggering Protocol	External Port	External Protocol	Status	Modify
<input type="checkbox"/>	--	--	--	--	--	--	--	--

Application: MSN Gaming Zone [View Existing Applications](#)

Triggering Port: 47624 (XX,1-65535)

Triggering Protocol: ALL

External Port: 2300-2400,28800-29000 (XX or XX-XX,1-65535,at most 5 pairs)

External Protocol: ALL

Enable This Entry

Cancel OK

Tips:

- You can add multiple port triggering rules according to your network need.
- The triggering ports can not be overlapped.
- If the application you need is not listed in the Existing Applications list, please enter the parameters manually. You should verify the external ports the application uses first and enter them into [External Port](#) field according to the format the page displays.

### 4. 5. 3. Make Applications Free from Port Restriction by DMZ

When a PC is set to be a DMZ (Demilitarized Zone) host on the local network, it is totally exposed to the Internet, which can realize the unlimited bidirectional communication between internal hosts and external hosts. The DMZ host becomes a virtual server with all ports opened. When you are not clear about which ports to open in some special applications, such as IP camera and database software, you can set the PC to be a DMZ host.



**Note:**

When DMZ is enabled, the DMZ host is totally exposed to the Internet, which may bring some potential safety hazards. If DMZ is not in use, please disable it in time.

**I want to:** Make the home PC join the Internet online game without port restriction.

For example, due to some port restriction, when playing the online games, you can login normally but cannot join a team with other players. To solve this problem, set your PC as a DMZ host with all ports open.

**How can I do that?**

1. Assign a static IP address to your PC, for example 192.168.0.100.
2. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
3. Go to [Advanced](#) > [NAT Forwarding](#) > [DMZ](#) and select [Enable DMZ](#).
4. Enter the IP address 192.168.0.100 in the [DMZ Host IP Address](#) filed.



DMZ

DMZ:  Enable DMZ

DMZ Host IP Address:

Save

5. Click [Save](#).

**Done!** The configuration is completed. You've set your PC to a DMZ host and now you can make a team to game with other players.


#### 4.5.4. Make Xbox Online Games Run Smoothly by UPnP

The UPnP (Universal Plug and Play) protocol allows applications or host devices to automatically find the front-end NAT device and send request to it to open the corresponding ports. With UPnP enabled, the applications or host devices on the local network and the Internet can freely communicate with each other thus realizing the seamless connection of the network. You may need to enable the UPnP if you want to use applications for multiplayer gaming, peer-to-peer connections, real-time communication (such as VoIP or telephone conference) or remote assistance, etc.

☛ **Tips:**

- UPnP is enabled by default in this router.
- Only the application supporting UPnP protocol can use this feature.
- UPnP feature needs the support of operating system (e.g. Windows Vista/ Windows 7/ Windows 8, etc. Some of operating system need to install the UPnP components).

For example, when you connect your Xbox to the router which has connected to the Internet to play online games, UPnP will send request to the router to open the corresponding ports allowing the following data penetrating the NAT to transmit. Therefore, you can play Xbox online games without a hitch.

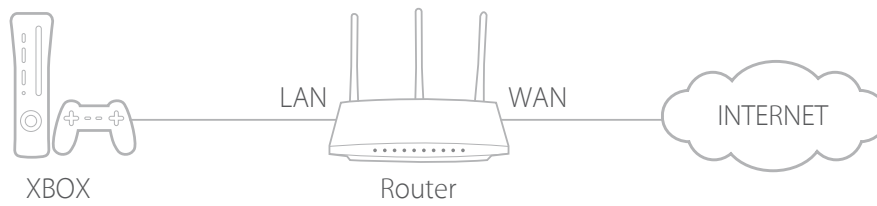

If necessary, you can follow the steps to change the status of UPnP.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > NAT Forwarding > UPnP** and toggle on or off according to your needs.

**UPnP**

---

UPnP:

UPnP Service List

Total Clients: 0 [Refresh](#)

ID	Service Description	External Port	Protocol	Internal IP Address	Internal Port
--	--	--	--	--	--

## 4.6. VPN Server


The VPN (Virtual Private Networking) Server allows you to access your home network in a secured way through Internet when you are out of home. The router offers two ways to setup VPN connection: OpenVPN and PPTP (Point to Point Tunneling Protocol) VPN.

OpenVPN is somewhat complex but with greater security and more stable. It is suitable for restricted environment, such as campus network and company intranet.

PPTP VPN is more easily used and its speed is faster, it's compatible with most operating systems and also supports mobile devices. Its security is poor and your packets may be cracked easily, and PPTP VPN connection may be prevented by some ISP.

### 4.6.1. Use OpenVPN to Access Your Home Network

In the OpenVPN connection, the home network can act as a server, and the remote device can access the server through the router which acts as an OpenVPN Server gateway. To use the VPN feature, you should enable OpenVPN Server on your router, and install and run VPN client software on the remote device. Please follow the steps below to set up an OpenVPN connection.

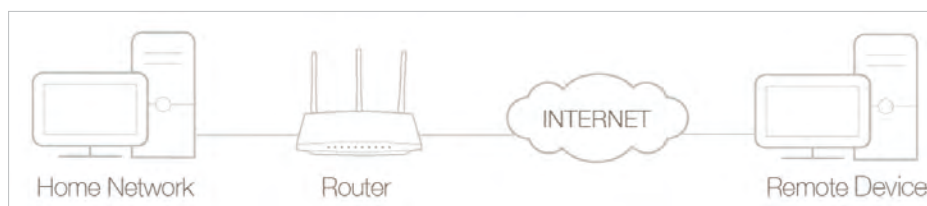

#### Step1. Set up OpenVPN Server on Your Router

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > VPN Server > OpenVPN**, and select **Enable VPN Server**.

**OpenVPN**

Note: No certificate currently, please **Generate** one before enabling VPN Server.

**Enable VPN Server**

Service Type:  **UDP**  TCP

Service Port:

VPN Subnet/Netmask:

Client Access:  **Home Network Only**  Internet and Home Network

**Save**

**Note:**

- Before you enable VPN Server, we recommend you configure Dynamic DNS Service (recommended) or assign a static IP address for router's WAN port and synchronize your System Time with Internet.
- The first time you configure the OpenVPN Server, you may need to **Generate** a certificate before you enable the VPN Server.

3. Select the **Service Type** (communication protocol) for OpenVPN Server: UDP, TCP.
4. Enter a VPN **Service Port** to which a VPN device connects, and the port number should be between 1024 and 65535.
5. In the **VPN Subnet/Netmask** fields, enter the range of IP addresses that can be leased to the device by the OpenVPN server.
6. Select your **Client Access** type. Select **Home Network Only** if you only want the remote device to access your home network; select **Internet and Home Network** if you also want the remote device to access Internet through the VPN Server.
7. Click **Save**.

8. Click [Generate](#) to get a new certificate.



**Note:**

If you have already generated one, please skip this step, or click [Generate](#) to update the certificate.

9. Click [Export](#) to save the OpenVPN configuration file which will be used by the remote device to access your router.



## Step 2. Configure OpenVPN Connection on Your Remote Device

1. Visit <http://openvpn.net/index.php/download/community-downloads.html> to download the OpenVPN software, and install it on your device where you want to run the OpenVPN client utility.

**Note:**

You need to install the [OpenVPN](#) client utility on each device that you plan to apply the VPN function to access your router. Mobile devices should download a third-party app from Google Play or Apple App Store.

2. After the installation, copy the file exported from your router to the OpenVPN client utility's "config" folder (for example, `C:\Program Files\OpenVPN\config` on Windows). The path depends on where the OpenVPN client utility is installed.
3. Run the OpenVPN client utility and connect it to OpenVPN Server.

### 4. 6. 2. Use PPTP VPN to Access Your Home Network

PPTP VPN Server is used to create a VPN connection for remote device. To use the VPN feature, you should enable PPTP VPN Server on your router, and configure the PPTP connection on the remote device. Please follow the steps below to set up a PPTP VPN connection.

#### Step 1. Set up PPTP VPN Server on Your Router

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [VPN Server](#) > [PPTP VPN](#), and select [Enable VPN Server](#).

**Note:**

Before you enable [VPN Server](#), we recommend you configure [Dynamic DNS Service](#) (recommended) or assign a static IP address for router's WAN port and synchronize your [System Time](#) with Internet.

3. In the [Client IP Address](#) field, enter the range of IP addresses (up to 10) that can be leased to the devices by the PPTP VPN server.
4. Click [Advanced](#) to set the PPTP connection permission according to your needs.
  - Select [Allow Samba \(Network Place\) access](#) to allow your VPN device to access your local Samba server.
  - Select [Allow NetBIOS passthrough](#) to allow your VPN device to access your Samba server using NetBIOS name.
  - Select [Allow Unencrypted connections](#) to allow unencrypted connections to your VPN server.
5. Click [Save](#).
6. Configure the PPTP VPN connection account for the remote device, you can create up to 16 accounts.

<input type="checkbox"/>	ID	Username	Password	Modify
--	--	--	--	--

Username:

Password:


Cancel OK

- 1) Click [Add](#).
- 2) Enter the [Username](#) and [Password](#) to authenticate devices to the PPTP VPN Server.
- 3) Click [OK](#).


## Step 2. Configure PPTP VPN Connection on Your Remote Device

The remote device can use the Windows built-in PPTP software or a third-party PPTP software to connect to PPTP Server. Here we use the [Windows built-in PPTP software](#) as an example.


1. Go to [Start > Control Panel > Network and Internet > Network and Sharing Center](#).
2. Select [Set up a new connection or network](#).

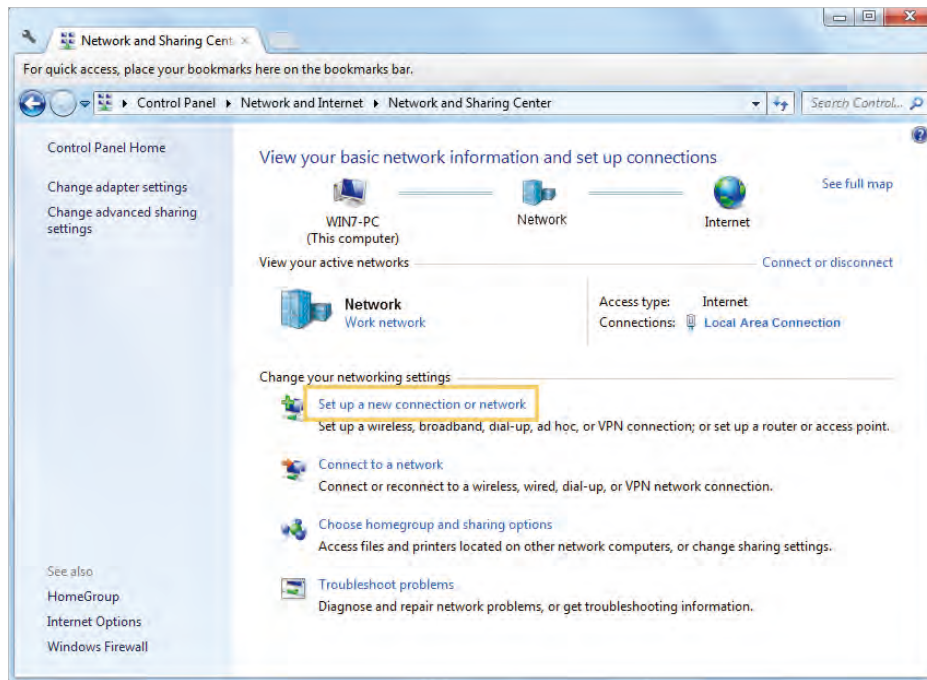


3. Select [Connect to a workplace](#) and click [Next](#).

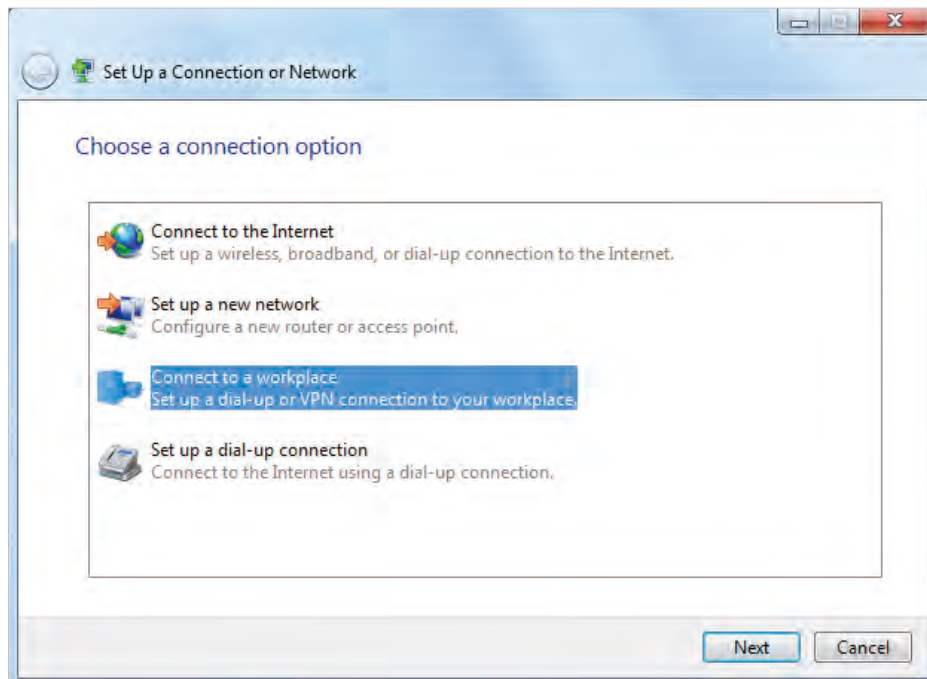


4. Select **Use my Internet connection (VPN)**.

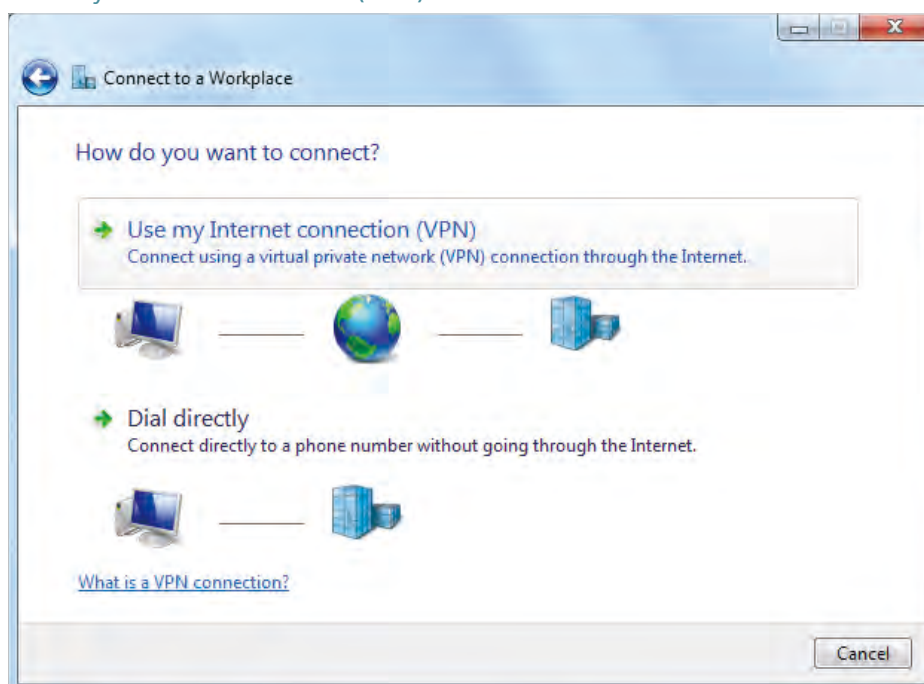


5. Enter the Internet IP address of the router (for example: 218.18.1.73) in the **Internet address** field. Click **Next**.

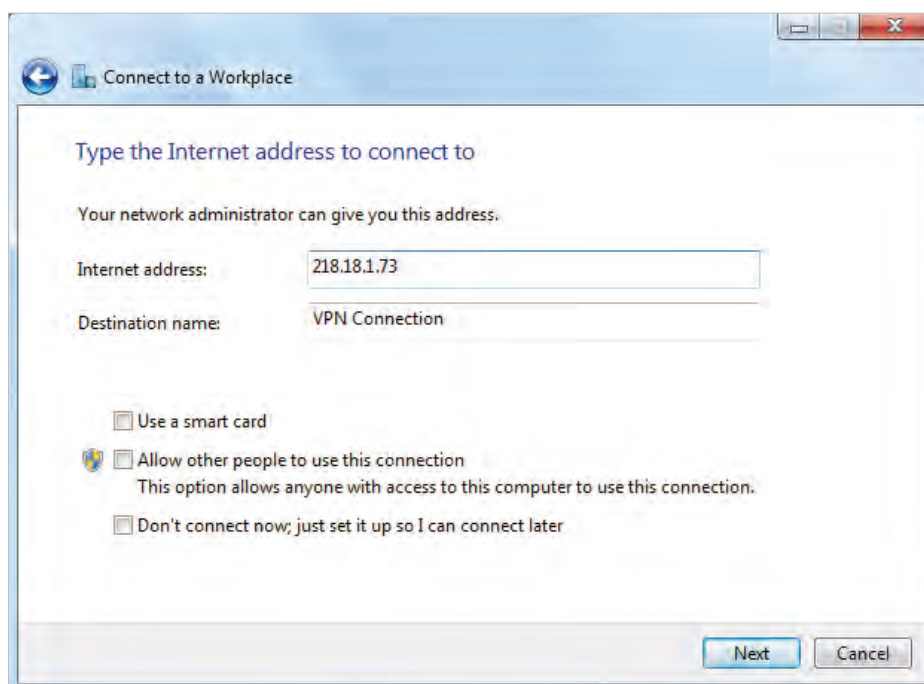

6. Enter the **User name** and **Password** you have set for the PPTP VPN server on your router, and click **Connect**.

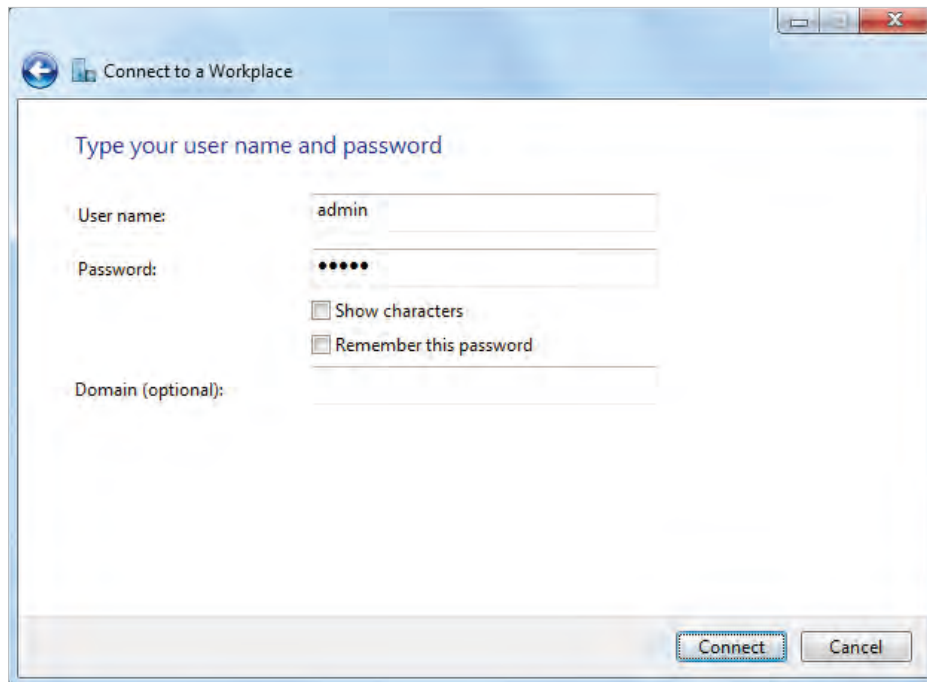

7. The PPTP VPN connection is created and ready to use.

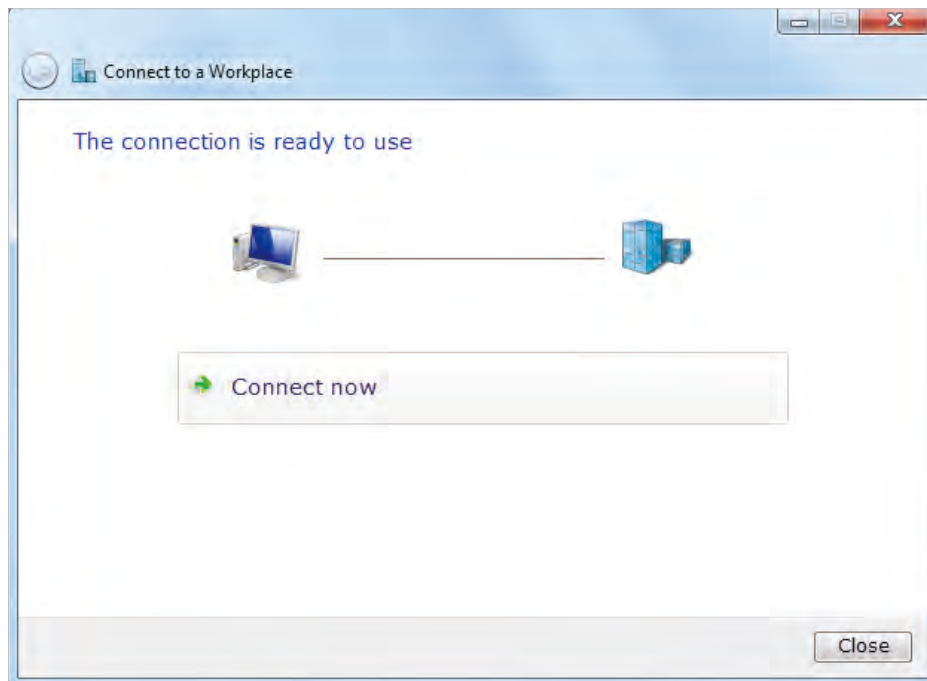




## 4.7. Customize Your Network Settings

### 4.7.1. Change the LAN Settings

The router is preset with a default LAN IP 192.168.0.1, which you can use to log in to its web management page. The LAN IP address together with the Subnet Mask also defines the subnet that the connected devices are on. If the IP address conflicts with another device on your local network or your network requires a specific IP subnet, you can change it.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Network](#) > [LAN](#).
3. Type in a new IP Address appropriate to your needs. And leave the [Subnet Mask](#) as the default settings.

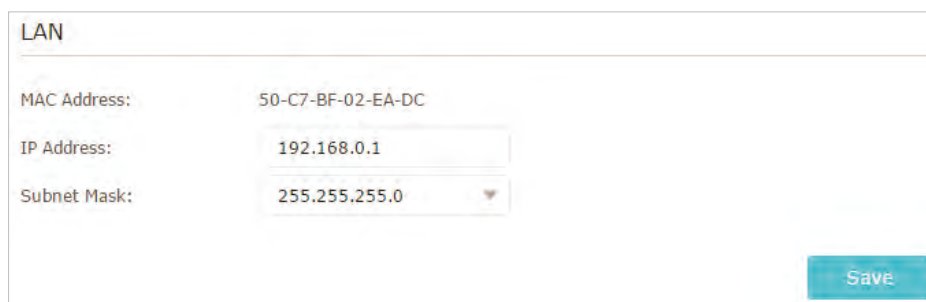

LAN

MAC Address: 50-C7-BF-02-EA-DC

IP Address: 192.168.0.1

Subnet Mask: 255.255.255.0

Save

4. Click [Save](#).

**Note:**

If you have set the Virtual Server, DMZ or DHCP address reservation, and the new LAN IP address is not in the same subnet with the old one, then you should reconfigure these features.

### 4.7.2. Set Up Link Aggregation

The Link Aggregation feature combines two ports together to make a single high-bandwidth data path, thus sustaining a higher-speed and more stable wired network.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Network](#) > [LAN](#).
3. Enable [Link Aggregation](#).



Link Aggregation

Link Aggregation:

4. Select [LACP active](#) or [LACP passive](#) for [Mode](#).
  - [LACP active](#): enables LACP (Link Aggregation Control Protocol) unconditionally.

- LACP passive: enables LACP only when an LACP device is detected.

Mode: LACP active

Link Aggregation Ports: LAN3  LAN4

5. Specify two ports for link aggregation.

Link Aggregation Ports:  LAN1  LAN2  LAN3  LAN4

6. Click [Save](#).

### 4.7.3. Configure to Support IPTV Service

**I want to:** Configure IPTV setup to enable Internet/IPTV/Phone service provided by my Internet Service Provider (ISP).

**How can I do that?**

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Network](#) > [IPTV](#).
3. **If your ISP provides the networking service based on IGMP technology**, e.g., British Telecom(BT) and Talk Talk in UK:
  - 1) Check the box for [IGMP Proxy](#) and select the [IGMP Version](#), either V2 or V3, as required by your ISP.

Settings

IGMP Proxy:  Enable

IGMP Version: V2

- 2) Click [Save](#).
- 3) After configuring IGMP proxy, IPTV can work behind your router now. You can connect your set-top box to any of the router's Ethernet port.

**If IGMP is not the technology your ISP applies to provide IPTV service:**

- 1) Tick [Enable IPTV](#).
- 2) Select the appropriate [Mode](#) according to your ISP.

- Select **Bridge** if your ISP is not listed and no other parameters are required.
- Select **Custom** if your ISP is not listed but provides necessary parameters.

The screenshot shows a configuration panel for IPTV. At the top, there is a checkbox labeled 'Enable IPTV' which is checked. Below it is a dropdown menu for 'Mode' currently set to 'Bridge'. The dropdown menu is open, displaying a list of options: 'Bridge', 'Russia', 'Singapore-ExStream', 'Malaysia-Unifi', 'Malaysia-Maxis', and 'Custom'. To the left of the dropdown are labels for 'LAN1:', 'LAN2:', 'LAN3:', and 'LAN4:', all of which are currently empty. At the bottom right of the panel is a blue 'Save' button.

- 3) After you have selected a mode, the necessary parameters, including the LAN port for IPTV connection, are predetermined. If not, select the LAN type to determine which port is used to support IPTV service.
- 4) Click **Save**.
- 5) Connect the set-top box to the corresponding LAN port which is predetermined or you have specified in Step 3.

## Done!

Your IPTV setup is done now! You may need to configure your set-top box before enjoying your TV.

### Tips:

Qos and IPTV cannot be enabled at the same time.

## 4.7.4. Specify DHCP Server Settings

By default, the DHCP (Dynamic Host Configuration Protocol) Server is enabled and the router acts as a DHCP server; it dynamically assigns TCP/IP parameters to client devices from the IP Address Pool. You can change the settings of the DHCP Server if necessary, and you can reserve LAN IP addresses for specified client devices.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > Network > DHCP Server**.

- To specify the IP address that the router assigns:

Settings

DHCP Server:  [Enable DHCP Server](#)

IP Address Pool:  -

Address Lease Time:  minutes. (1-2880. The default value is 120.)

Default Gateway:  (Optional)

Primary DNS:  (Optional)

Secondary DNS:  (Optional)

[Save](#)

1. Check the box for [Enable DHCP Server](#).
2. Enter the starting and ending IP addresses in the [IP Address Pool](#).
3. Enter other parameters if the ISP offers. The [Default Gateway](#) is automatically filled in and is the same as the LAN IP address of the router.
4. Click [Save](#).

- To reserve an IP address for a specified client device:

1. Click [Add](#) in the [Address Reservation](#) section.

Address Reservation

[+ Add](#) [- Delete](#)

<input type="checkbox"/>	ID	MAC Address	Reserved IP Address	Description	Status	Modify
<input type="checkbox"/>	-	-	-	-	-	-

MAC Address:

IP Address:

Description:

[Enable This Entry](#)

[Cancel](#) [OK](#)

2. Click [View Existing Devices](#) or enter the [MAC address](#) of the client device.
3. Enter the [IP address](#) to reserve for the client device.
4. Enter the [Description](#) for this entry.
5. Check the box for [Enable This Entry](#) and click [OK](#).

### 4.7.5. Set Up a Dynamic DNS Service Account

Most ISPs assign a dynamic IP address to the router and you can use this IP address to access your router remotely. However, the IP address can change any time and you don't know when it changes. In this case, you might apply the DDNS (Dynamic Domain Name Server) feature on the router to allow you and your friends to access your router and local servers (FTP, HTTP, etc.) using domain name without checking and remembering the IP address.

**Note:**

DDNS does not work if the ISP assigns a private WAN IP address (such as 192.168.1.x) to the router.

To set up DDNS, please follow the instructions below:

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Network](#) > [Dynamic DNS](#).
3. Select the DDNS [Service Provider](#) (NO-IP or DynDNS). If you don't have a DDNS account, select a service provider and click [Go to register](#).

4. Enter the username, password and domain name of the account.
5. Click [Login and Save](#).

**Tips:**

If you want to use a new DDNS account, please [logout](#) first, and then login with the new account.

### 4.7.6. Create Static Routes


Static routing is a form of routing that is configured manually by a network administrator or a user by adding entries into a routing table. The manually-configured routing information guides the router in forwarding data packets to the specific destination.

**I want to:**

Visit multiple networks and servers at the same time.

*For example*, in a small office, my PC can surf the Internet through Router A, but I also want to visit my company's network. Now I have a switch and Router B. I connect the devices as shown in

the following figure so that the physical connection between my PC and my company's server is established. To surf the Internet and visit my company's network at the same time, I need to configure the static routing.

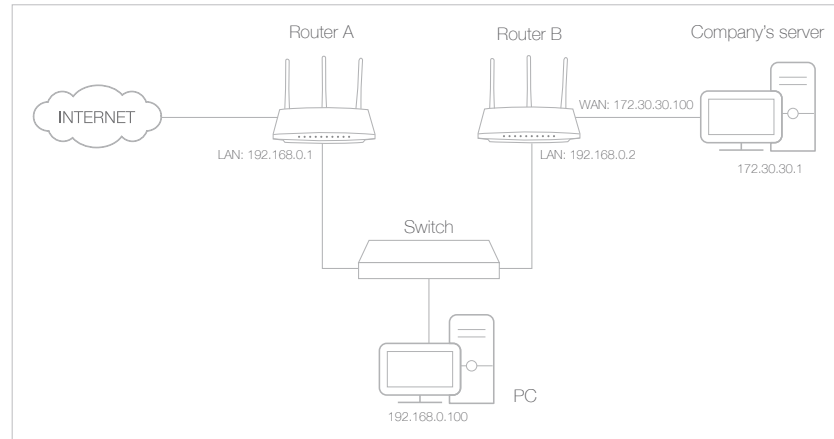

## How can I do that?

1. Change the routers' LAN IP addresses to two different IP addresses on the same subnet. Disable Router B's DHCP function.
2. Visit <http://tplinkwifi.net>, and log in with password you set for Router A.
3. Go to **Network > Advanced Routing**.
4. Click **Add** and finish the settings according to the following explanations:

**Static Routing**

+ Add - Delete

<input type="checkbox"/>	ID	Network Destination	Subnet Mask	Default Gateway	Interface	Description	Status	Modify
<input type="checkbox"/>	--	--	--	--	--	--	--	--

Network Destination:

Subnet Mask:

Default Gateway:

Interface:

Description:

Enable This Entry

**Network Destination:** The destination IP address that you want to assign to a static route. This IP address cannot be on the same

subnet with the WAN IP or LAN IP of Router A. In the example, the IP address of the company network is the destination IP address, so here enter 172.30.30.1.


**Subnet Mask:** Determines the destination network with the destination IP address. If the destination is a single IP address, enter 255.255.255.255; otherwise, enter the subnet mask of the corresponding network IP. In the example, the destination network is a single IP, so here enter 255.255.255.255.

**Default Gateway:** The IP address of the gateway device to which the data packets will be sent. This IP address must be on the same subnet with the router's IP which sends out data. In the example, the data packets will be sent to the LAN port of Router B and then to the Server, so the default gateway should be 192.168.0.2.

**Interface:** Determined by the port (WAN/LAN) that sends out data packets. In the example, the data are sent to the gateway through the LAN port of Router A, so LAN should be selected.

**Description:** Enter a description for this static routing entry.

5. Click **OK**.
6. Check the **System Routing Table** below. If you can find the entry you've set, the static routing is set successfully.

System Routing Table				
Active Routes Number: 1				 Refresh
ID	Network Destination	Subnet Mask	Gateway	Interface
1	192.168.0.0	255.255.255.0	0.0.0.0	lan

## Done!

Open a web browser on your PC. Enter the company server's IP address to visit the company network.

### 4.7.7. Specify Wireless Settings

The router's wireless network name (SSID) and password, and security option are preset in the factory. The preset SSID and password can be found on the label of the router. You can customize the wireless settings according to your needs.

Visit <http://tplinkwifi.net>, and log in with password you set for the router.

- To enable or disable the wireless function:

1. Go to **Basic > Wireless**.

2. The wireless radio is enabled by default. If you want to disable the wireless function of the router, just uncheck the box for [Enable Wireless Radio](#). In this case, all the wireless settings will be invalid.

- To change the wireless network name (SSID) and wireless password:

1. Go to [Basic](#) > [Wireless](#).

2. Create a new SSID in [Network Name \(SSID\)](#) and customize the password for the network in [Password](#). The value is case-sensitive.

**Note:**

If you change the wireless settings with a wireless device, you will be disconnected when the settings are effective. Please write down the new SSID and password for future use.

- To hide SSID:

1. Go to [Basic](#) > [Wireless](#).

2. Select [Hide SSID](#), and your SSID won't display when you scan for local wireless networks on your wireless device and you need to manually join the network.

- To change the security option:

1. Go to [Advanced](#) > [Wireless](#) > [Wireless Settings](#).

Wireless Settings 2.4GHz | 5GHz-1 | 5GHz-2

Enable Wireless Radio

Network Name (SSID):   Hide SSID

Security:

Version:  Auto  WPA-PSK  WPA2-PSK

Encryption:  Auto  TKIP  AES

Password:

Mode:

Channel Width:

Channel:

Transmit Power:  Low  Middle  High

2. Select the wireless network [2.4GHz](#), or [5GHz](#).

3. Select an option from the [Security](#) drop-down list. We recommend you don't change the default settings unless necessary. If you select other options, configure the related parameters according to the help page.

**In addition**

- [Mode](#) - Select a transmission mode according to your wireless client devices. It is recommended to just leave it as default.



- **Channel Width** - Select a channel width (bandwidth) for the wireless network.
- **Channel** - Select an operating channel for the wireless network. It is recommended to leave the channel to **Auto**, if you are not experiencing the intermittent wireless connection issue.
- **Transmit Power** - Select either **High**, **Middle** or **Low** to specify the data transmit power. The default and recommended setting is **High**.


#### 4.7.8. Use WPS for Wireless Connection

Wi-Fi Protected Setup (WPS) provides an easier approach to set up a security-protected Wi-Fi connection.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > Wireless > WPS**.

#### Set the Router's PIN

Router's PIN is enabled by default to allow wireless devices to connect to the router using the PIN. You can use the default one or generate a new one.

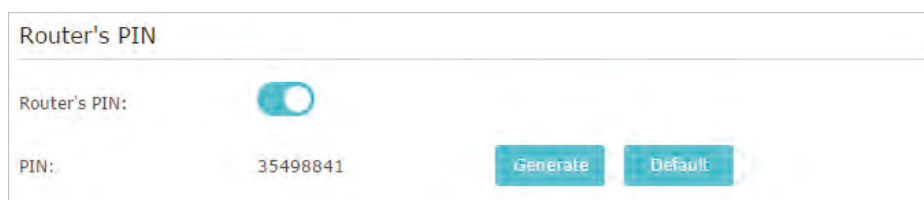


#### Note:

- If you want to enable/disable the WPS feature, go to **System Tools > System Parameters > WPS**, check or uncheck the box for **Enable WPS**.
- PIN (Personal Identification Number) is an eight-character identification number preset to each router. WPS supported devices can connect to your router with the PIN. The default PIN is printed on the label of the router.

#### Use the WPS Wizard for Wi-Fi Connections

1. Select a setup method:
  - **Push Button(Recommended):** Click **Connect** on the screen. Within two minutes, press the WPS button on the client device.
  - **PIN:** Enter the client's PIN, and click **Connect**.

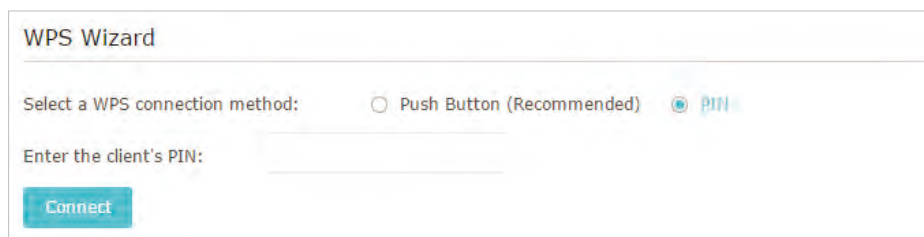



2. **Success** will appear on the above screen and the WPS LED on the router will keep on for five minutes if the client has been successfully added to the network.


### 4.7.9. Schedule Your Wireless Function

The wireless network can be automatically off at a specific time when you do not need the wireless connection.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [Wireless](#) > [Wireless Schedule](#).
3. Select [2.4GHz](#), [5GHz-1](#) or [5GHz-2](#) to change the corresponding settings.
4. Enable the [Wireless Schedule](#) feature.

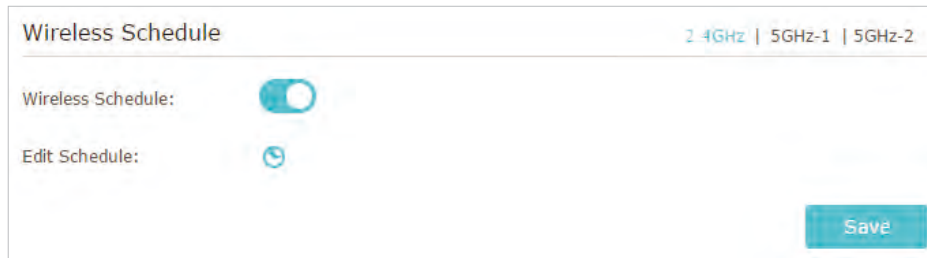

5. Click the icon  to set the Effective Time. Drag the cursor over the cells to choose the period during which you need the wireless off automatically, and click [OK](#).

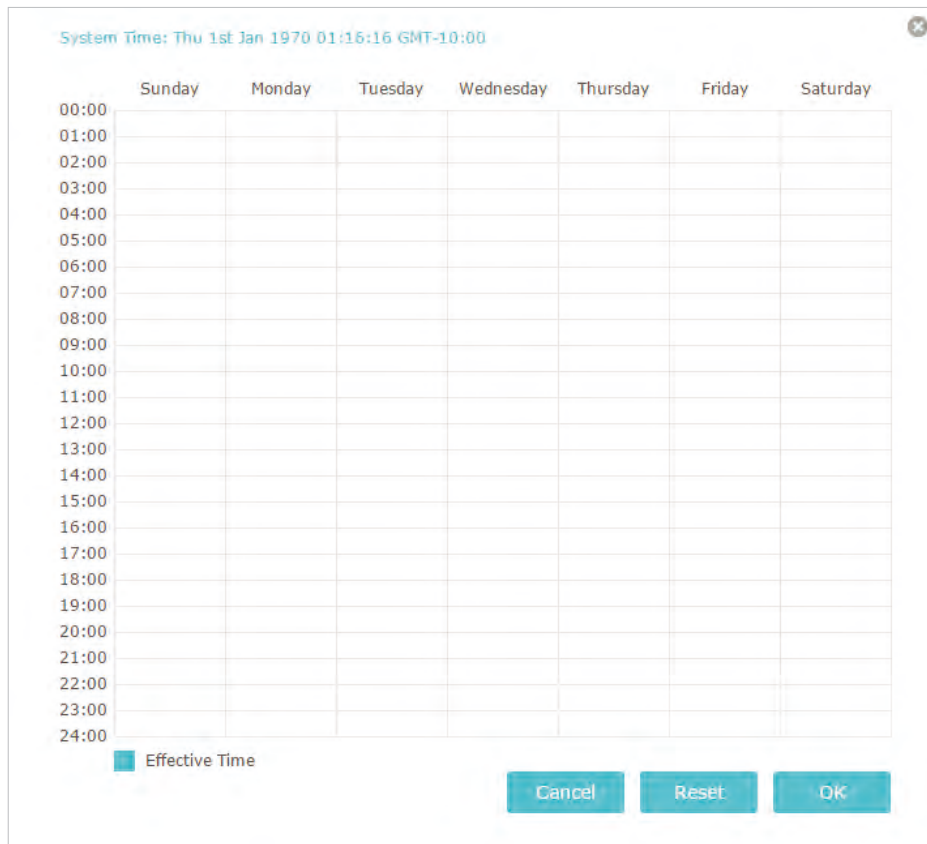

6. Click [Save](#).
7. If you also want to set wireless off time for other band(s), please repeat the steps above.

**Note:**


- The Effective Time Schedule is based on the time of the router. You can go to [Advanced > System Tools > Time Settings](#) to modify the time.
- The wireless LED will be off if the corresponding wireless network is disabled.
- The wireless network will be automatically turned on after the time period you set.

## 4.8. Manage the Router

### 4.8.1. Adjust Wi-Fi Coverage

You can set the extender's Wi-Fi coverage depending on how large you want your Wi-Fi area to be.

1. Visit <http://tplinkwifi.net> and log in with the password you set for the extender.
2. Go to [Advanced > Advanced-Settings > Wi-Fi Coverage](#).
3. Select [Min](#), [Mid](#) or [Max](#) to adjust your Wi-Fi coverage of the extender.

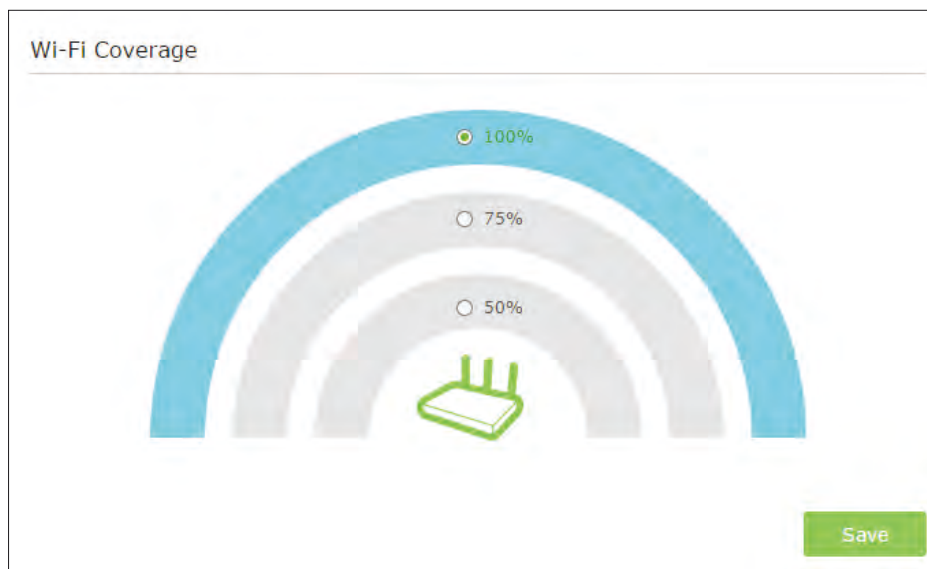


4. Click [Save](#).

### 4.8.2. Set Up System Time


System time is the time displayed while the router is running. The system time you configure here will be used for other time-based functions like Parental Controls. You can choose the way to obtain the system time as needed.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced > System Tools > Time Settings](#).
  - To get time from the Internet:
    1. In the [Set Time](#) field, select [Get automatically from the Internet](#).

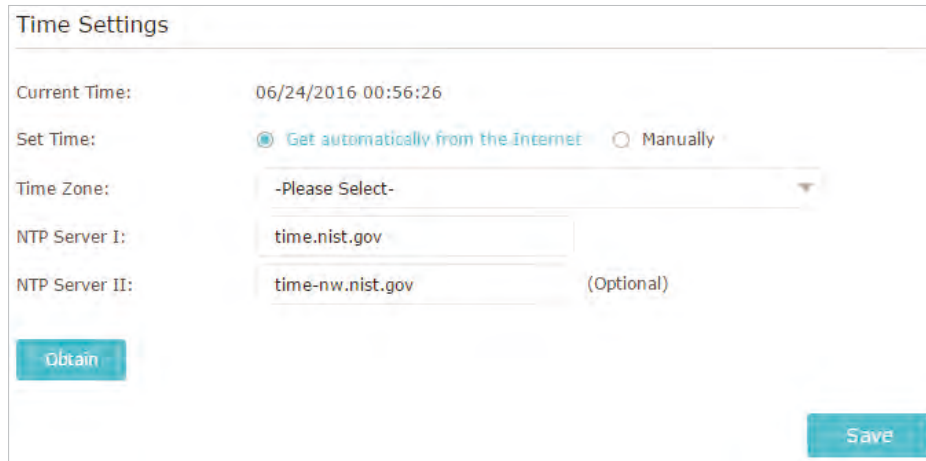

The screenshot shows a 'Time Settings' form. The 'Current Time' is 06/24/2016 00:56:26. The 'Set Time' section has two radio buttons: 'Get automatically from the Internet' (selected) and 'Manually'. The 'Time Zone' is a dropdown menu showing '-Please Select-'. The 'NTP Server I' field contains 'time.nist.gov'. The 'NTP Server II' field contains 'time-nw.nist.gov' with '(Optional)' to its right. There are 'Obtain' and 'Save' buttons at the bottom.

2. Select your local **Time Zone** from the drop-down list.
  3. In the **NTP Server I** field, enter the IP address or domain name of your desired NTP Server.
  4. (Optional) In the **NTP Server II** field, enter the IP address or domain name of the second NTP Server.
  5. Click **Obtain** to get the current Internet time and click **Save**.
- To manually set the date and time:
    1. In the **Set Time** field, select **Manually**.

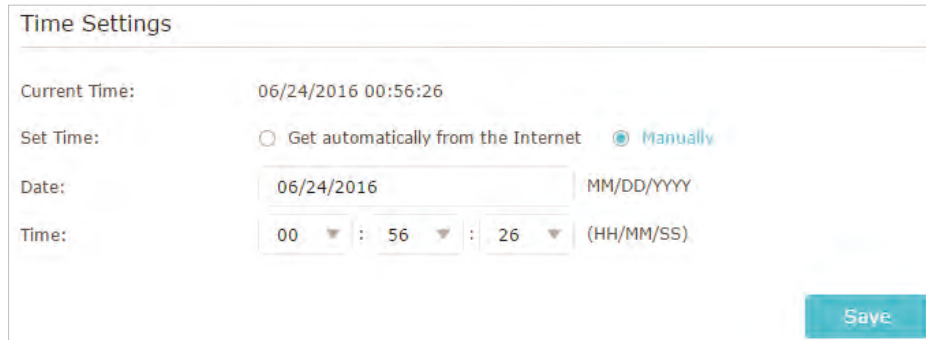

The screenshot shows the 'Time Settings' form with 'Manually' selected. The 'Date' field contains '06/24/2016' with 'MM/DD/YYYY' to its right. The 'Time' field contains '00 : 56 : 26' with '(HH/MM/SS)' to its right. There is a 'Save' button at the bottom right.

2. Set the current **Date** (In **MM/DD/YYYY** format).
  3. Set the current **Time** (In **HH/MM/SS** format).
  4. Click **Save**.
- To set up Daylight Saving Time:
    1. Select **Enable Daylight Saving Time**.

2. Select the correct **Start** date and time when daylight saving time starts at your local time zone.
3. Select the correct **End** date and time when daylight saving time ends at your local time zone.
4. Click **Save**.

### 4. 8. 3. Test the Network Connectivity

Diagnostics is used to test the connectivity between the router and the host or other network devices.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > System Tools > Diagnostics**.

3. Enter the information with the help of page tips:
  - 1) Choose **Ping** or **Traceroute** as the diagnostic tool to test the connectivity;
    - **Ping** is used to test the connectivity between the router and the tested host, and measure the round-trip time.
    - **Traceroute** is used to display the route (path) your router has passed to reach the tested host, and measure transit delays of packets across an Internet Protocol network.
  - 2) Enter the **IP Address** or **Domain Name** of the tested host.
4. Click **Start** to begin the diagnostics.

**Tips:**

Click **Advanced**, you can modify the ping count, ping packet size or the Traceroute Max TTL. It's recommended to keep the default value.

The figure below indicates the proper connection between the router and the Yahoo server (www.Yahoo.com) tested through **Ping**.

```

PING www.Yahoo.com (116.214.12.74): 64 data bytes
Reply from 116.214.12.74: bytes=64 ttl=50 seq=1 time=51.640 ms
Reply from 116.214.12.74: bytes=64 ttl=50 seq=2 time=53.671 ms
Reply from 116.214.12.74: bytes=64 ttl=50 seq=3 time=56.045 ms
Reply from 116.214.12.74: bytes=64 ttl=50 seq=4 time=57.857 ms

--- Ping Statistic "www.Yahoo.com" ---
Packets: Sent=4, Received=4, Lost=0 (0.00% loss)
Round-trip min/avg/max = 51.640/54.803/57.857 ms

```

The figure below indicates the proper connection between the router and the Yahoo server (www.Yahoo.com) tested through [Traceroute](#).

```

traceroute to www.Yahoo.com (116.214.12.74), 20 hops max, 38 byte packets
 1 219.133.12.1 (219.133.12.1) 19.556 ms 22.274 ms 22.024 ms
 2 113.106.38.77 (113.106.38.77) 30.115 ms 22.649 ms 20.931 ms
 3 * * *
 4 183.56.65.14 (183.56.65.14) 26.210 ms 29.428 ms 28.272 ms
 5 * 202.97.60.25 (202.97.60.25) 29.272 ms 25.461 ms
 6 202.97.60.46 (202.97.60.46) 27.335 ms 27.616 ms 28.272 ms
 7 202.97.60.149 (202.97.60.149) 22.805 ms 24.024 ms 24.711 ms
 8 202.97.6.30 (202.97.6.30) 47.610 ms 54.452 ms 61.137 ms
 9 r4105-s2.tp.hinet.net (220.128.6.110) 51.171 ms 50.515 ms 56.107 ms
10 220.128.11.190 (220.128.11.190) 60.950 ms 60.200 ms 60.419 ms

```

#### 4.8.4. Upgrade the Firmware


TP-LINK aims at providing better network experience for users.

We will inform you through the web management page if there's any update firmware available for your router. Also, the latest firmware will be released at the TP-LINK official website [www.tp-link.com](http://www.tp-link.com), and you can download it from the [Support](#) page for free.

##### Note:

- Make sure you remove all attached USB devices from the router before the firmware upgrade to prevent data loss.
- Backup your router configuration before firmware upgrade.
- Do NOT turn off the router during the firmware upgrade.

#### Online Upgrade

1. Visit <http://tplinkwifi.net>, and log in with password you've set for the router.
2. When the latest firmware is available for your router, the update icon  will display in the top-right corner of the page. Click the icon to go to the [Firmware Upgrade](#) page.

Alternatively, you can go to [Advanced](#) > [System Tools](#) > [Firmware Upgrade](#), and click [Check for upgrade](#) to see whether the latest firmware is released.




3. Focus on the **Online Upgrade** section, and click **Upgrade**.



4. Wait a few minutes for the upgrade and reboot to complete.


**Tips:**

If there's a new and important firmware update for your router, you will see the notification (similar as shown below) on your computer as long as a web browser is opened. Click **Upgrade now**, and log into the web management page with the username and password you set for the router. You will see the **Firmware Upgrade** page.

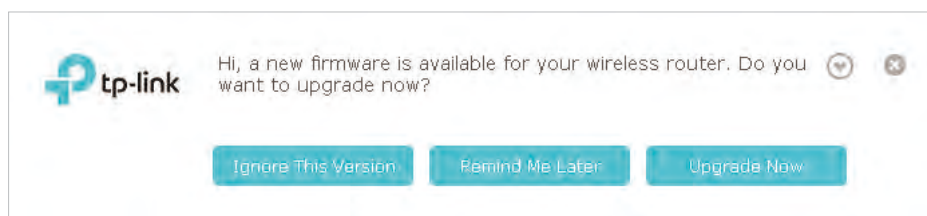

## Manual Upgrade

1. Download the latest firmware file for the router from [www.tp-link.com](http://www.tp-link.com).
2. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
3. Go to **Advanced > System Tools > Firmware Upgrade**.
4. Focus on the Device Information section. Make sure the downloaded firmware file is matched with the **Hardware Version**.
5. Focus on the **Manual Upgrade** section. Click **Browse** to locate the downloaded new firmware file, and click **Upgrade**.

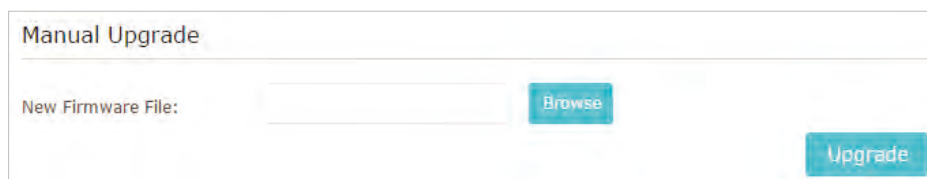

6. Wait a few minutes for the upgrade and reboot to complete.

## Restore Interrupted Upgrade after Power Failure

If your router cannot start up after an upgrade interruption due to power failure, follow the steps below to restore the interrupted upgrade. Otherwise, your router cannot work again.

1. Make sure you have the latest firmware file in your computer. If not, try another way to connect your computer to the Internet and download the latest firmware file from [www.tp-link.com](http://www.tp-link.com).

2. Connect your computer to the router with an Ethernet cable.
3. Visit [192.168.0.1](http://192.168.0.1) and you will see the following upgrade page.

System error. The router cannot start up normally.  
Please upgrade your router. You can download the firmware file from [www.tp-link.com](http://www.tp-link.com).

New Firmware File:  [Browse](#) [Upgrade](#)

4. Click [Browse](#) and select the downloaded firmware file.
5. Click [Upgrade](#) and wait for a few minutes until the router completes the upgrading and restarts.

#### 4. 8. 5. Backup and Restore Configuration Settings

The configuration settings are stored as a configuration file in the router. You can backup the configuration file to your computer for future use and restore the router to a previous settings from the backup file when needed. Moreover, if necessary you can erase the current settings and reset the router to the default factory settings.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Backup & Restore](#).

- To backup configuration settings:

Click [Backup](#) to save a copy of the current settings to your local computer. A '.bin' file of the current settings will be stored to your computer.

Backup

---

Save a copy of your current settings.

[Backup](#)

- To restore configuration settings:

1. Click [Browse](#) to locate the backup configuration file stored on your computer, and click [Restore](#).

Restore

---

Restore saved settings from a file.

File:  [Browse](#)

[Restore](#)


2. Wait a few minutes for the restoring and rebooting.

**Note:** During the restoring process, do not turn off or reset the router.

- To reset the router to factory default settings:



1. Click [Factory Restore](#) to reset the router.

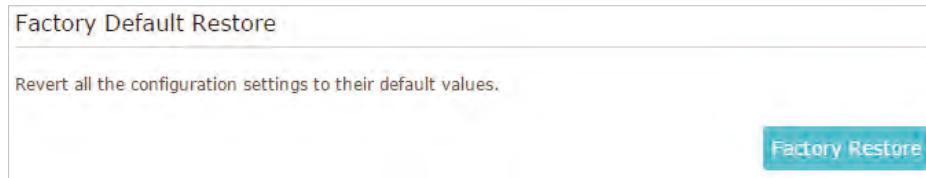

Factory Default Restore

---

Revert all the configuration settings to their default values.

[Factory Restore](#)

2. Wait a few minutes for the resetting and rebooting.

**Note:**

- During the resetting process, do not turn off or reset the router.
- We strongly recommend you backup the current configuration settings before resetting the router.

#### 4.8.6. Change the Administrator Account

The account management feature allows you to change your login username and password of the web management page.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Administration](#) and focus on the [Account Management](#) section.



Account Management

---

Old Username:

Old Password:

New Username:

New Password:

Low Middle High

Confirm New Password:

[Save](#)

3. Enter the old username and old password, then a new username and a new password twice (both case-sensitive). Click [Save](#).
4. Use the new username and password for the following logins.


### 4.8.7. Password Recovery

This feature allows you to recover your default login username and password in case you forget them.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Administration](#) and focus on the [Password Recovery](#) section.
3. Check the box for [Enable Password Recovery](#).
4. Specify a [mailbox \(From\)](#) for sending the recovery letter and enter its [SMTP Server](#) address. Specify a [mailbox \(To\)](#) for receiving the recovery letter. If the mailbox (From) to send the recovery letter requires encryption, select [Enable Authentication](#) and enter its username and password.

🔔 **Tips:**

- SMTP server is available for users in most webmail systems. For example, the SMTP server address of Gmail is smtp.gmail.com. You can refer to their Help page to learn the SMTP server address.
- Generally, Enable Authentication should be selected if the login of the mailbox requires username and password.

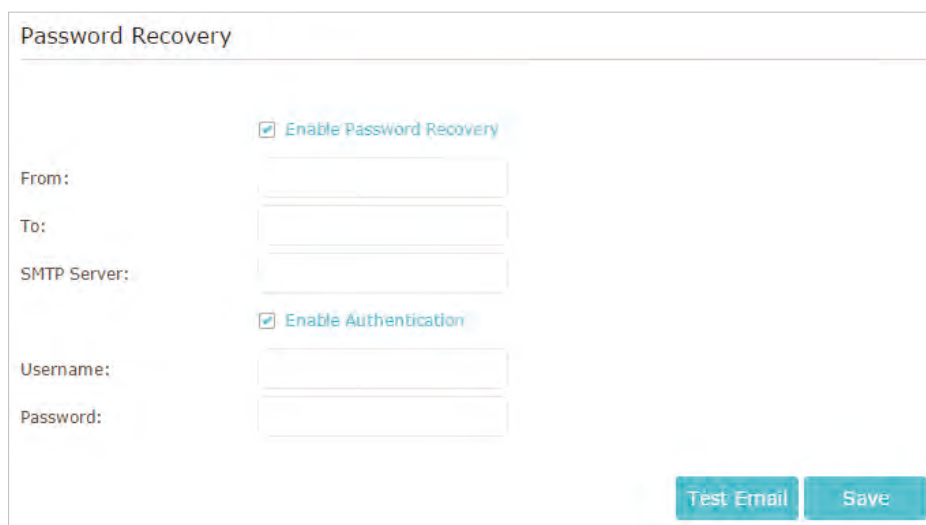

The screenshot shows the 'Password Recovery' configuration page. It features a title bar at the top. Below the title, there are two checked checkboxes: 'Enable Password Recovery' and 'Enable Authentication'. The form includes several input fields: 'From:', 'To:', 'SMTP Server:', 'Username:', and 'Password:'. At the bottom right of the form, there are two buttons: 'Test Email' and 'Save'.

5. Click [Save](#).

You can click [Test Email](#) to test whether the configuration is successful. To recover the default login username and password, please refer to [FAQ](#).

### 4.8.8. Local Management

This feature allows you to limit the number of client devices on your LAN from accessing the router by using the MAC address-based authentication.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [Administration](#) and complete the settings In [Local Management](#) section according to your needs.

- **Allow all LAN connected devices to manage the router:**

Toggle on [Access for All LAN Connected Devices](#).

**Local Management**

---

Access for All LAN Connected Devices:  Toggle On to enable the management for all devices on LAN or keep it Off to enable the management for a specific device.

- **Allow specific devices to manage the router:**

- 1) Toggle off [Access for All LAN Connected Devices](#).
- 2) Click [Add](#).

**Local Management**

---

Access for All LAN Connected Devices:  Toggle On to enable the management for all devices on LAN or keep it Off to enable the management for a specific device.

+ Add - Delete

<input type="checkbox"/>	ID	MAC Address	Description	Status	Modify
-	-	-	-	-	-

MAC Address:  View Existing Devices

Description:

Enable This Entry

Cancel
OK

-	1	C0-4A-00-1A-C3-45	Your PC!	💡	📄 🗑️
---	---	-------------------	----------	---	------

- 3) Click [View Existing Devices](#) and select the device to manage the router from the Existing Devices list, or enter the MAC address of the device manually.
- 4) Specify a [Description](#) for this entry.
- 5) Check the box for [Enable This Entry](#).
- 6) Click [OK](#).

### 4.8.9. Remote Management

This feature allows you to control remote devices' authority to manage the router.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > System Tools > Administration** and complete the settings in **Remote Management** section according to your needs.

- **Forbid all devices to manage the router remotely:** Select **Disable Remote Management** and click **Save**.
- **Allow all devices to manage the router remotely:**
  - 1) Select **Enable Remote Management for All Devices**.
  - 2) Enter **Web Management Port** (1024-65535 or 80).
  - 3) Click **Save**.

Devices on the Internet can log in to <http://Router's WAN IP address:port number> (such as <http://113.116.60.229:1024>) to manage the router.

📌 **Tips:**

- You can find the WAN IP address of the router on **Basic > Network Maps > Internet**.
- The router's WAN IP is usually a dynamic IP. Please refer to [Set Up a Dynamic DNS Service Account](#) if you want to log in to the router through a domain name.

- **Allow specific devices to manage the router remotely:**
  - 1) Select **Enable Remote Management for Specified Devices**.
  - 2) Enter **Web Management Port** (1024-65535 or 80).
  - 3) In **Remote Management IP address**, enter the IP address of the remote device to manage the router.
  - 4) Click **Save**.

Devices using this WAN IP can manage the router by logging in to <http://Router's WAN IP:port number> (such as <http://113.116.60.229:1024>).

📌 **Tips:**

The router's WAN IP is usually a dynamic IP. Please refer to [Set Up a Dynamic DNS Service Account](#) if you want to log in to the router through a domain name.

## 4.8.10. System Log

When the router does not work properly, you can save the system log and send it to the technical support for troubleshooting.

- **To Save the System Log in Local:**

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [System Log](#).
3. Choose the type and level of the system logs according to your need.
4. Click [Save Log](#) to save the system logs to local.

The screenshot shows the 'System Log' page. At the top, there are filters: 'Log Filter: Type= ALL' and 'and Level= ALL'. Below the filters are 'Refresh' and 'Delete All' buttons. The main part of the page is a table with the following data:

ID	Time	Type	Level	Log Content
1	2016-06-24 04:28:31	Local Management	NOTICE	[19000] Accessable mode change: Devices in the list.
2	2016-06-24 04:25:12	Locale	INFO	[16605] Language is changed to 'en_US'
3	2016-06-24 04:25:12	Locale	DEBUG	[16605] Explorer language is 'zh_CN'
4	2016-06-24 04:25:02	Locale	INFO	[16435] Language is changed to 'en_US'
5	2016-06-24 04:25:02	Locale	DEBUG	[16435] Explorer language is 'zh_CN'
6	2016-06-24 04:24:58	Locale	INFO	[16283] Language is changed to 'en_US'
7	2016-06-24 04:24:58	Locale	DEBUG	[16283] Explorer language is 'zh_CN'

Below the table, there is a 'Mail Settings' section with a dropdown arrow. At the bottom, there are two buttons: 'Mail Log' and 'Save Log'.

- **To Send the System Log to a Mailbox at a Fixed Time:**

For example, I want to check my router's working status at a fixed time every day, however, it's too troublesome to log in to the web interface every time I want to go checking. It would be great if the system logs could be sent to my mailbox at 8 a.m. every day.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Advanced](#) > [System Tools](#) > [System Log](#).
3. Click [Mail Settings](#).
4. Enter the information with the help of page tips:

Mail Settings

From:

To:

SMTP Server:

Enable Authentication

Username:

Password:

Enable Auto Mail

Log at  :  (HH:MM) everyday

Log every  hours

Save

- 1) **From:** Enter the email address used for sending the system log.
- 2) **To:** Enter the recipient's email address, which can be the same as or different from the sender's email address.
- 3) **SMTP Server:** Enter the SMTP server address.

☞ **Tips:** SMTP server is available for users in most webmail systems. For example, the SMTP server address of Hotmail is smtp-mail.outlook.com. You can refer to their Help page to learn the SMTP server address.

- 4) Select **Enable Authentication**.

☞ **Tips:** Generally, Enable Authentication should be selected if the login of the mailbox requires username and password.

- 5) **Username:** Enter the email address used for sending the system log.
- 6) **Password:** Enter the password to login the sender's email address.
- 7) Select **Enable Auto Mail**.

☞ **Tips:** The router will send the system log to the designated email address if this option is enabled.

- 8) Set a fixed time. The recipient will receive the system log sent at this time every day.

5. Click **Save**.

#### 4.8.11. Monitor the Internet Traffic Statistics

The Traffic Statistics page displays the network traffic of the LAN, WAN and WLAN sent and received packets, allowing you to monitor the volume of Internet traffic statistics.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Advanced > System Tools > Traffic Statistics**.
3. Toggle on **Traffic Statistics**, and then you can monitor the traffic statistics in **Traffic Statistics List** section.

Click [Refresh](#) to update the statistic information on the page.

Click [Reset All](#) to reset all statistic values in the list to zero.

Click [Delete All](#) to delete all statistic information in the list.

Click  to reset the statistic information of the specific device.

Click  to delete the specific device item in the list.

#### 4.8.12. Control LEDs

The router's LEDs indicate router's activities and status. You can turn on or turn off the LEDs either from the web management page or by pressing the LED button.

##### To turn on or off the LEDs:

- Press the LED button on the router (if available) about 2 seconds to turn on or off the LEDs.
- Visit <http://tplinkwifi.net>, and log in with password you set for the router. Click the [LED](#) icon in the top right corner of the page.

##### To turn off LEDs during Night Mode Period:

- 1) Visit <http://tplinkwifi.net>, and log in with password you set for the router.
- 2) Go to [Advanced](#) > [System Tools](#) > [System Parameters](#).
- 3) In the [LED Control](#) section, check the box for [Enable Night Mode](#).
- 4) Specify a time period in the [Night Mode Period](#) as needed, and the LEDs will be off during this period.
- 5) Click [Save](#).

## Chapter 5

---

# Configure the Router in Access Point Mode

---

This chapter presents how to configure the various features of the router working as an Access Point.

This chapter contains the following sections:

- ["Change the working mode"](#)
- ["Guest Network"](#)
- ["Parental controls"](#)
- ["Customize your wireless setting"](#)
- ["Customize Your Network"](#)
- ["Manage the Router"](#)



## 5. 1. Change the working mode

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the router.
2. Click **Mode** button in the top-right corner of the page, select **Access Point** and click **Save**.

### Mode Selection

**Access Point**

Transforms your existing wired network to a wireless network.

**Router**

Provides Internet access for multiple wired and wireless devices simultaneously.

**Range Extender**

Extends your existing wireless coverage by repeating the wireless signal.

Cancel

Save

## 5. 2. Guest Network

This function allows you to provide Wi-Fi access for guests without disclosing your main network. When you have guests in your house, apartment, or workplace, you can create a guest network for them. In addition, you can customize guest network options to ensure network security and privacy.

### 5. 2. 1. Create a Network for Guests

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Settings > Guest Network**. Locate the **Wireless** section.
3. Create a guest network as needed.
  - 1) Enable **Guest network**.
  - 2) Customize the SSID. Do not select **Hide SSID** unless you want your guests to manually input the SSID for guest network access.
  - 3) Select the **Security** type.

- If **No security** is selected, no password is needed to access your guest network.
- If **WAP/WPA2-Personal** is selected, keep the default **Version** and **Encryption** values, and customize your own password.

4. Click **Save**. Now your guests can access your guest network using the SSID and password you set!

 **Tips:**

To view guest network information, go to **Settings > Status** and locate the **Guest Network** section.

## 5.2.2. Customize Guest Network Options

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Settings > Guest Network**. Locate the **Settings** section.
3. Customize guest network options according to your needs.

- **Allow guests to see each other**

Check this box if you want to allow the wireless clients on your guest network to communicate with each other via methods such as network neighbors and Ping.

- **Allow guests to access my local network**

Check this box if you want to allow the wireless clients on your guest network to communicate with the devices connected to your router's LAN ports or main network via methods such as network neighbors and Ping.

4. Click **Save**. Now you can ensure network security and privacy!

 **Tips:**

To view guest network information, go to **Settings > Status** and locate the **Guest Network** section.

## 5.3. Parental controls


This function allows you to block inappropriate, explicit and malicious websites, and control access to specified websites at specified time.

**I want to:** Control the times of day my children or other home network users are allowed to access the Internet and even types of websites they can visit.


For example, I want to allow my children's devices (e.g. a computer or a tablet) to access only [www.tp-link.com](http://www.tp-link.com) and [Wikipedia.org](http://Wikipedia.org) from 18:00 (6PM) to 22:00 (10PM) at the weekend and not other times.


**How can I do that?**

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Settings > Parental Controls](#) and enable [Parental Controls](#).



3. Click [Add](#). And then Click [View Existing Devices](#), and select the access device. Or, input the [Device Name](#) and [MAC Address](#) manually.

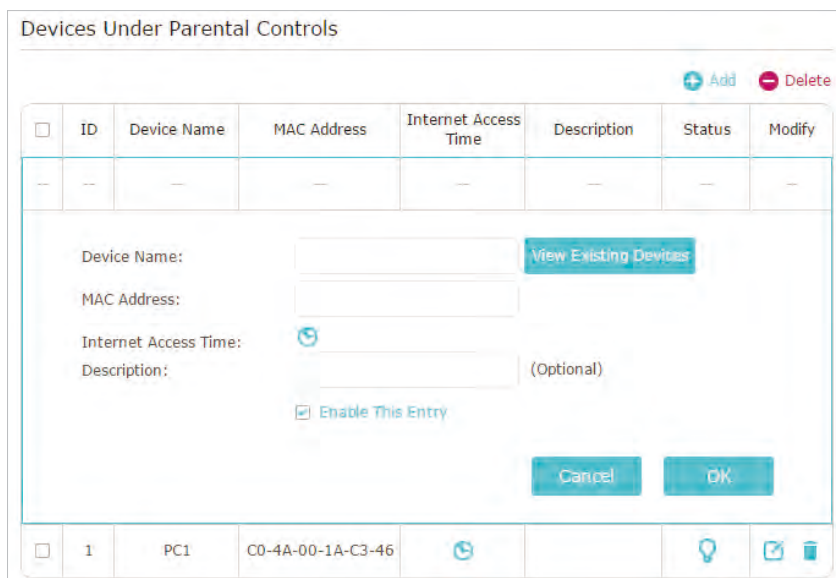

4. Click the  icon to set the Internet Access Time. Drag the cursor over the appropriate cell(s) and click [OK](#).

5. Enter a **Description** for the entry, check the box for **Enable This Entry**, and then click **OK**.
6. Select **Whitelist** as the restriction policy.


**Tips:**

- With **Blacklist** selected, the controlled devices cannot access any websites containing the specified keywords during the Internet Access Time period.
- With **Whitelist** selected, the controlled devices can only access websites containing the specified keywords during the Internet Access Time period.

7. Click **+ Add a New Domain Name**. Enter a website and click **Save**.

You can add up to 32 keywords for either Blacklist or Whitelist. Below are some sample entries to allow access.

- **For Whitelist:** Enter a web address (e.g. wikipedia.org) to allow access only to its related websites. If you wish to block all Internet browsing access, do not add any keyword to the **Whitelist**.
- **For Blacklist:** Specify a web address (e.g. wikipedia.org), a web address keyword (e.g. wikipedia) or a domain suffix (eg. .edu or .org) to block access only to the websites containing that keyword or suffix.

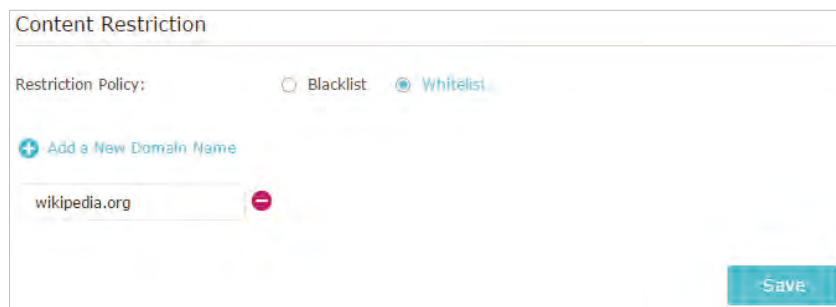

**Done!**

Now you can control your children's Internet access as needed.

## 5.4. Customize your wireless setting

### 5.4.1. Specify Wireless Settings

The router's wireless network name (SSID) and password, and security option are preset in the factory. The preset SSID and password can be found on the label of the router. You can customize the wireless settings according to your needs.

Visit <http://tplinkwifi.net>, and log in with password you set for the router.

- To enable or disable the wireless function:

1. Go to [Settings](#) > [Wireless](#) > [Wireless Settings](#).
2. The wireless radio is enabled by default. If you want to disable the wireless function of the router, just uncheck the box for [Enable Wireless Radio](#). In this case, all the wireless settings will be invalid.

- To change the wireless network name (SSID) and wireless password:

1. Go to [Settings](#) > [Wireless](#) > [Wireless Settings](#).
2. Create a new SSID in [Network Name \(SSID\)](#) and customize the password for the network in [Password](#). The value is case-sensitive.

**Note:**

If you change the wireless settings with a wireless device, you will be disconnected when the settings are effective. Please write down the new SSID and password for future use.

- To hide SSID:

1. Go to [Settings](#) > [Wireless](#) > [Wireless Settings](#).
2. Select [Hide SSID](#), and your SSID won't display when you scan for local wireless networks on your wireless device and you need to manually join the network.

## 5.4.2. Use WPS for Wireless Connection

Wi-Fi Protected Setup (WPS) provides an easier approach to set up a security-protected Wi-Fi connection.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Settings > Wireless > WPS](#).

### Use the WPS button

Click [WPS start](#) button on the page, and immediately tap the [WPS](#) button on your WPS-supported devices such as Android phones, tablets or most network cards within two minutes.

#### WPS Method

Method One--Push Button(recommended)  
Connect to this router via WPS button.



### Set the Router's PIN

Router's PIN is enabled by default to allow wireless devices to connect to the router using the PIN. You can use the default one or generate a new one.

Router's PIN	
Router's PIN:	<input checked="" type="checkbox"/>
PIN:	35498841
	<a href="#">Generate</a> <a href="#">Default</a>


**Note:**

- If you want to enable/disable the WPS feature, go to [System Tools > System Parameters > WPS](#), check or uncheck the box for [Enable WPS](#).

- PIN (Personal Identification Number) is an eight-character identification number preset to each router. WPS supported devices can connect to your router with the PIN. The default PIN is printed on the label of the router.

## Use the Client's PIN

Enter the client's PIN in the field, and click [Connect](#).

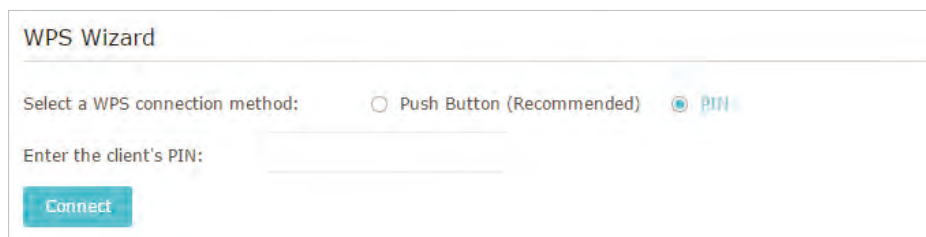

3. [Success](#) will appear on the above screen and the WPS LED on the router will keep on for five minutes if the client has been successfully added to the network.

## 5. 5. Customize Your Network

### 5. 5. 1. Change LAN Settings

The extender is preset with a default LAN IP 192.168.0.254, with which you can log in to the web management page. The LAN IP address, together with the Subnet Mask, also defines the subnet that the connected devices are on. If the IP address conflicts with another device on your local network or your network requires a specific IP subnet, you can change it.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [Network](#).
3. Select [Use the following IP address](#).
4. Enter a new IP address as needed and leave the [Subnet Mask](#) as the default settings and enter the gateway that is in the same subnet as the IP address. The gateway is usually the LAN IP address of your extender.




5. Click [Save](#).

### 5.5.2. Adjust Wi-Fi Coverage

You can set the extender's Wi-Fi coverage depending on how large you want your Wi-Fi area to be.

1. Visit <http://tplinkwifi.net> and log in with the password you set for the extender.
2. Go to [Settings](#) > [Advanced Settings](#) > [Wi-Fi Coverage](#).
3. Select [Min](#), [Mid](#) or [Max](#) to adjust your Wi-Fi coverage of the extender.

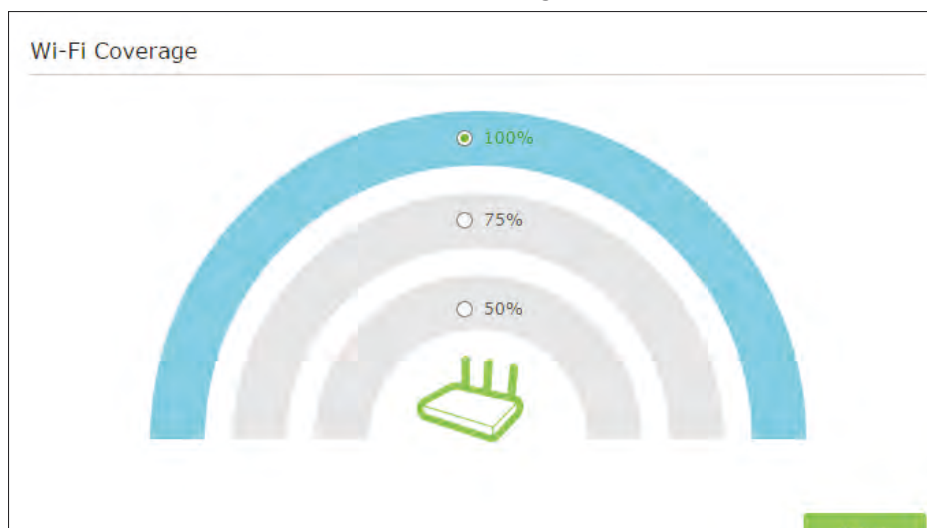

4. Click [Save](#).

### 5.5.3. Set Access Control

Access Control allows you to permit or block specific devices from accessing the Internet for a specific period.

1. Visit <http://tplinkwifi.net> and log in with the password you set for the extender.
2. Go to [Settings](#) > [Advanced Settings](#) > [Access Control](#).
3. Enable [Access Control](#).



#### ➤ To block specific device(s):

##### ■ Note:

Devices connected to the extender via an Ethernet cable cannot be blocked.

1. Select [Blacklist](#) and click [Save](#).



Access Mode

Default Access Mode:  Blacklist  Whitelist

SAVE

2. Select the device to be blocked in the [Online Devices](#) table by ticking the corresponding checkbox.
3. Click [Block](#) and the selected device(s) will be added to the [Devices in Blacklist](#) table.

Online Devices

Refresh Block

<input type="checkbox"/>	ID	Device Name	IP Address	MAC Address	Connection Type	Modify
<input type="checkbox"/>	1		192.168.0.102		Wireless	

4. Click in the [Devices in Blacklist](#) table to set the [Effective Time](#) for a certain entry as needed.

Device Name:

MAC Address:

Effective Time:  Cannot access at any time  
 Cannot access based on the time schedule

Time:  :  -  :

Day(s):   Monday  Tuesday  
 Wednesday  Thursday  
 Friday  Saturday  
 Sunday

Cancel OK

5. Click [OK](#).

➤ **To permit specific device(s):**

1. Select [Whitelist](#) and click [Save](#).

Access Mode

Default Access Mode:  Blacklist  Whitelist

SAVE

2. Click [Add](#) in the [Devices in Whitelist](#) table. Enter the [Device Name](#) and [MAC Address](#). And you can set the [Effective Time](#) for a certain entry as needed.

Device Name:

MAC Address:

Effective Time:  Access at any time  
 Access based on the time schedule

Time:  :  -  :

Day(s):   Monday  Tuesday  
 Wednesday  Thursday  
 Friday  Saturday  
 Sunday

3. Click **OK**.

## 5. 6. Manage the Router

### 5. 6. 1. Set Up System Time

The System Time of the extender will be used for time-based functions such as the Power Schedule function. If you have enabled the Daylight Saving Time feature, the system time will be synchronized with the daylight saving time you configure.

4. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.

5. Go to **Settings > System Tools > Time Settings**.

#### ➤ To get system time:

1. Select your local **Time Zone** from the drop-down list.

Time Settings

Current Time: 01/01/2016 00:05:29

Time Zone: (GMT+01:00) Berlin, Stockholm, Rome, Bern, Brussels

2. Click **Save**.

#### ➤ To set up Daylight Saving Time:

1. Select [Enable Daylight Saving Time](#).

Daylight Saving Time

Enable Daylight Saving Time

Start: 2016 Mar Last Sun 1 AM

End: 2016 Oct Last Sun 1 AM

Current Status: Daylight Saving Time is not active.

Save

2. Select the [Start](#) and [End](#) date and time of the daylight saving time at your local time zone.
3. Click [Save](#).

### 5.6.2. Control LEDs

The LEDs of the extender indicate its activities and status. You can enable the Night Mode feature to specify a time period during which the LEDs are off.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
  2. Go to [Settings](#) > [System Tools](#) > [LED Control](#).
- **To specify a time period when LEDs are off:**
1. Select [Night Mode](#).
  2. Specify a time period in the [LED Off Time](#) field, and the LEDs will be off during this period.
  3. Click [Save](#).

LED Control

Night Mode

LED Off Time: 21 : 00 - 09 : 00

Note: Before enabling the LED Control, make sure [Time Settings](#) is correct.

Save

### 5.6.3. Power Schedule

The Power Schedule feature allows you to specify a time period during which the extender is off.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [Advanced Settings](#) > [Power Schedule](#).

➤ **To specify a time period when the extender is off:**

1. Select [Enable Power Schedule](#).
2. Specify a time period in the [Power-Off Time](#) field and days in the [Day\(s\)](#) field, and the extender will be off during this period.

**Power Schedule**

[Enable Power Schedule](#)

Power-Off Time: 21 : 00 - 09 : 00

Day(s): [Every Day](#)  [Monday](#)  [Tuesday](#)  [Wednesday](#)  
 [Thursday](#)  [Friday](#)  [Saturday](#)  
 [Sunday](#)

**Note:** The extender will automatically turn off according to the time schedule. Please make sure the system [Time Settings](#) are correct.

[Save](#)

3. Click [Save](#).

#### 5.6.4. Upgrade the Firmware

TP-LINK is committed to improving product features, giving you a better network experience. You can download the latest firmware file from the [Support](#) page at our website [www.tp-link.com](http://www.tp-link.com) and upgrade the firmware to the latest version.

■ **Note:**

1. Make sure the latest firmware file is matched with the hardware version (as shown in the download section of the [Support](#) page).
2. Make sure that you have a stable connection between the extender and your computer. It is NOT recommended to upgrade the firmware wirelessly.
3. Backup your extender configuration.
4. Do NOT power off the extender during the firmware upgrade.

➤ **To upgrade the firmware online:**

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [System Tools](#) > [Firmware Upgrade](#), and click [Check for upgrade](#) to see whether a new firmware is released.

**Online Upgrade**

Latest Version:

[Check for upgrade](#)


- Focus on the **Online Upgrade** section, and click **Upgrade**.



- Wait a few minutes for the firmware upgrade to complete and the router to reboot.

➤ **To upgrade the firmware locally:**

- Download the latest firmware file for the extender from our website [www.tp-link.com](http://www.tp-link.com).
- Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
- Go to **Settings > System Tools > Firmware Upgrade**.
- Click **Browse** to locate the downloaded new firmware file, and then click **Upgrade**.

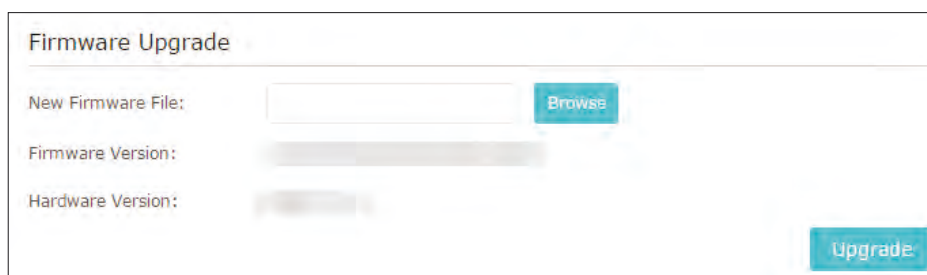

- Wait a few minutes for the firmware upgrade to complete and the router to reboot.


### 5.6.5. Backup and Restore Configuration Settings

The configuration settings are stored as a configuration file in the extender. You can backup the configuration file and restore the extender to the previous settings from the backup file when needed. Moreover, if necessary, you can erase the current settings and reset the extender to the default factory settings.

- Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
- Go to **Settings > System Tools > Backup & Restore**.


➤ **To backup configuration settings:**

Click **Backup** to save a copy of the current settings to your local computer. A '.bin' file of the current settings will be stored on your computer.

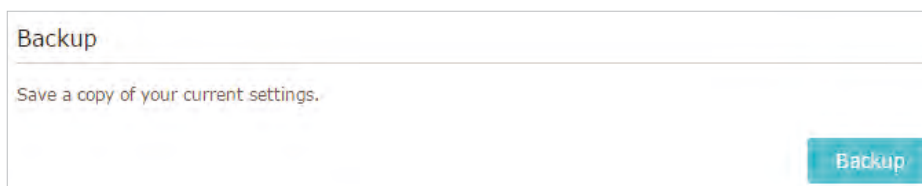

➤ **To restore configuration settings:**

1. Click [Browse](#) to locate the backup configuration file stored on your computer, and click [Restore](#).

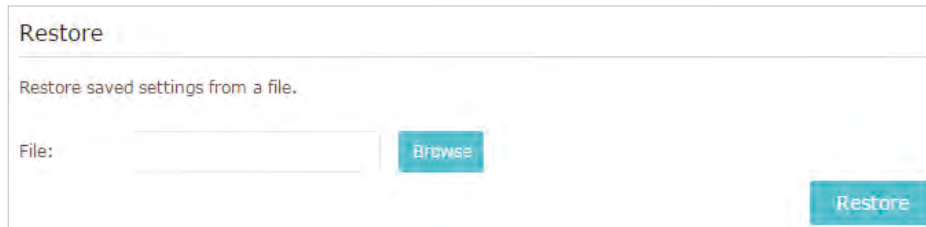

2. Wait a few minutes for the restore and reboot.

■ **Note:** During the restore process, do not power off or reset the extender.

➤ **To reset the extender to factory default settings:**

1. Click [Factory Restore](#) to reset the extender.



2. Wait a few minutes for the reset and reboot.

■ **Note:**

1. During the reset process, do not power off or reset the router.
2. We strongly recommend you backup the current configuration settings before resetting the extender.

### 5. 6. 6. Change Login Password

The account management feature allows you to change your login password of the management webpage.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [System Tools](#) > [Admin Account](#).
3. Enter the old password, then the new password twice (both case-sensitive) and click [Save](#).



4. Use the new password for future logins.


### 5.6.7. System Log

If the extender is not working normally, you can save the system log and send it to our technical support team.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [System Tools](#) > [System Log](#).

➤ **To Save the system log locally:**

1. Choose the type and level of the system log as needed.
2. Click [Save Log](#) to save the system logs to a local disk.

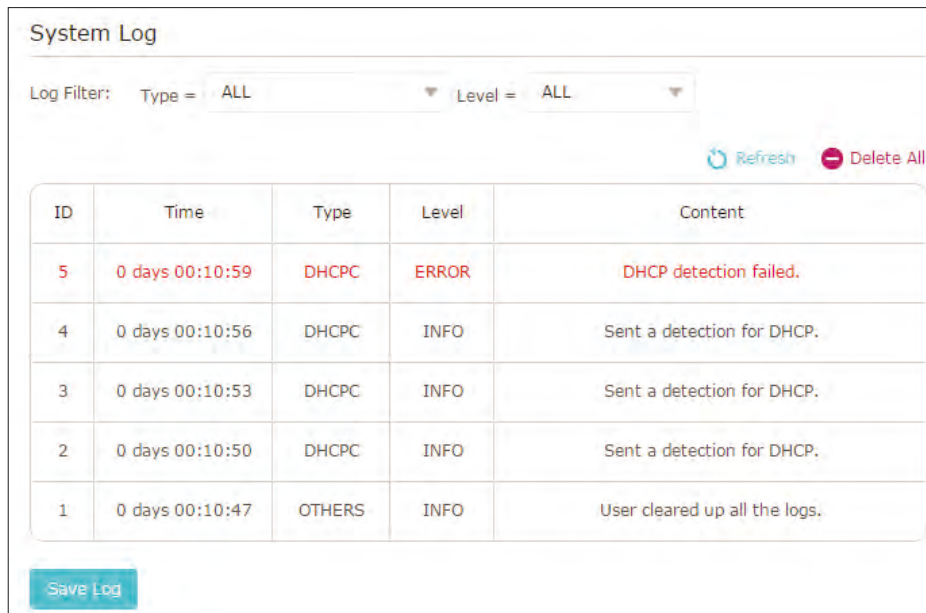

The screenshot shows the 'System Log' interface. At the top, there are filters for 'Log Filter: Type = ALL' and 'Level = ALL'. Below the filters are two buttons: 'Refresh' (with a circular arrow icon) and 'Delete All' (with a red minus icon). The main part of the interface is a table with the following data:

ID	Time	Type	Level	Content
5	0 days 00:10:59	DHCPC	ERROR	DHCP detection failed.
4	0 days 00:10:56	DHCPC	INFO	Sent a detection for DHCP.
3	0 days 00:10:53	DHCPC	INFO	Sent a detection for DHCP.
2	0 days 00:10:50	DHCPC	INFO	Sent a detection for DHCP.
1	0 days 00:10:47	OTHERS	INFO	User cleared up all the logs.

At the bottom left of the interface, there is a blue button labeled 'Save Log'.

## Chapter 6

---

# Configure the Router in Range Extender Mode

---

This chapter presents how to configure the various features of the router working as a Range Extender.

This chapter contains the following sections:

- ["Change the working mode"](#)
- ["Guest Network"](#)
- ["Parental controls"](#)
- ["Customize your wireless setting"](#)
- ["Customize Your Network"](#)
- ["Manage the Router"](#)



## 6.1. Change the working mode

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the router.
2. Click **Mode** button in the top-right corner of the page, select **Range Extender** and click **Save**.

### Mode Selection

Access Point

Transforms your existing wired network to a wireless network.

Router

Provides Internet access for multiple wired and wireless devices simultaneously.

Range Extender

Extends your existing wireless coverage by repeating the wireless signal.

Cancel

Save

## 6.2. Guest Network

This function allows you to provide Wi-Fi access for guests without disclosing your main network. When you have guests in your house, apartment, or workplace, you can create a guest network for them. In addition, you can customize guest network options to ensure network security and privacy.

### 6.2.1. Create a Network for Guests

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Settings** > **Guest Network**. Locate the **Wireless** section.
3. Create a guest network as needed.
  - 1) Enable **Guest network**.
  - 2) Customize the SSID. Do not select **Hide SSID** unless you want your guests to manually input the SSID for guest network access.
  - 3) Select the **Security** type.
    - If **No security** is selected, no password is needed to access your guest network.

- If **WAP/WPA2-Personal** is selected, keep the default **Version** and **Encryption** values, and customize your own password.

4. Click **Save**. Now your guests can access your guest network using the SSID and password you set!

### 6. 2. 2. Customize Guest Network Options

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to **Settings > Guest Network**. Locate the **Settings** section.
3. Customize guest network options according to your needs.

- **Allow guests to see each other**

Check this box if you want to allow the wireless clients on your guest network to communicate with each other via methods such as network neighbors and Ping.

- **Allow guests to access my local network**

Check this box if you want to allow the wireless clients on your guest network to communicate with the devices connected to your router's LAN ports or main network via methods such as network neighbors and Ping.

4. Click **Save**. Now you can ensure network security and privacy!

## 6. 3. Parental controls


This function allows you to block inappropriate, explicit and malicious websites, and control access to specified websites at specified time.

**I want to:** Control the times of day my children or other home network users are allowed to access the Internet and even types of websites they can visit.


For example, I want to allow my children's devices (e.g. a computer or a tablet) to access only [www.tp-link.com](http://www.tp-link.com) and [Wikipedia.org](http://Wikipedia.org) from 18:00 (6PM) to 22:00 (10PM) at the weekend and not other times.

## How can I do that?

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Settings > Parental Controls](#) and enable [Parental Controls](#).



3. Click [Add](#). And then Click [View Existing Devices](#), and select the access device. Or, input the [Device Name](#) and [MAC Address](#) manually.

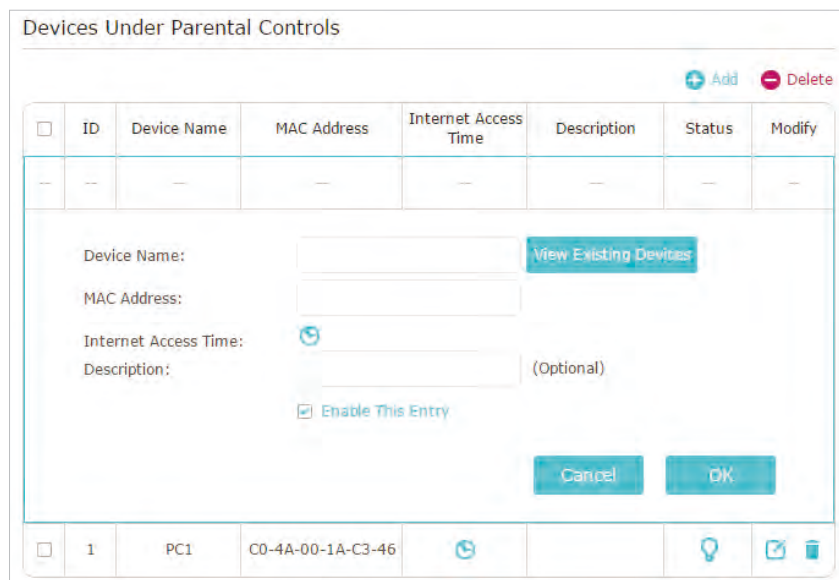

4. Click the icon to set the Internet Access Time. Drag the cursor over the appropriate cell(s) and click [OK](#).

System Time: Sat 25th Jun 2016 02:31:34 undefined

	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
00:00							
01:00							
02:00							
03:00							
04:00							
05:00							
06:00							
07:00							
08:00							
09:00							
10:00							
11:00							
12:00							
13:00							
14:00							
15:00							
16:00							
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
24:00							

Time

Cancel Reset Save

5. Enter a **Description** for the entry, check the box for **Enable This Entry**, and then click **OK**.

6. Select **Whitelist** as the restriction policy.

Content Restriction

Restriction Policy:  Blacklist  **Whitelist**


**Tips:**

- With **Blacklist** selected, the controlled devices cannot access any websites containing the specified keywords during the Internet Access Time period.
- With **Whitelist** selected, the controlled devices can only access websites containing the specified keywords during the Internet Access Time period.

7. Click **+ Add a New Domain Name**. Enter a website and click **Save**.

You can add up to 32 keywords for either Blacklist or Whitelist. Below are some sample entries to allow access.

- **For Whitelist:** Enter a web address (e.g. wikipedia.org) to allow access only to its related websites. If you wish to block all Internet browsing access, do not add any keyword to the **Whitelist**.
- **For Blacklist:** Specify a web address (e.g. wikipedia.org), a web address keyword (e.g. wikipedia) or a domain suffix (eg. .edu or .org) to block access only to the websites containing that keyword or suffix.

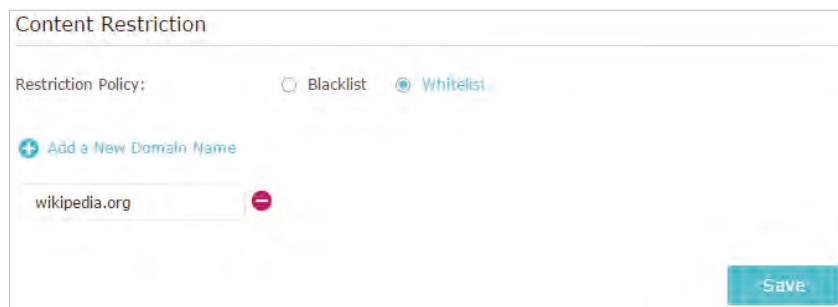

**Done!**

Now you can control your children's Internet access as needed.

## 6.4. Customize your wireless setting

### 6.4.1. Specify Wireless Settings

The router's wireless network name (SSID) and password, and security option are preset in the factory. The preset SSID and password can be found on the label of the router. You can customize the wireless settings according to your needs.

Visit <http://tplinkwifi.net>, and log in with password you set for the router.

- To enable or disable the wireless function:

1. Go to [Settings](#) > [Wireless](#) > [Wireless Settings](#).
2. The wireless radio is enabled by default. If you want to disable the wireless function of the router, just uncheck the box for [Enable Wireless Radio](#). In this case, all the wireless settings will be invalid.

- To change the wireless network name (SSID) and wireless password:

1. Go to [Settings](#) > [Wireless](#) > [Wireless Settings](#).
2. Create a new SSID in [Network Name \(SSID\)](#) and customize the password for the network in [Password](#). The value is case-sensitive.

**Note:**

If you change the wireless settings with a wireless device, you will be disconnected when the settings are effective. Please write down the new SSID and password for future use.

- To hide SSID:

1. Go to [Settings](#) > [Wireless](#) > [Wireless Settings](#).
2. Select [Hide SSID](#), and your SSID won't display when you scan for local wireless networks on your wireless device and you need to manually join the network.

## 6.4.2. Use WPS for Wireless Connection

Wi-Fi Protected Setup (WPS) provides an easier approach to set up a security-protected Wi-Fi connection.

1. Visit <http://tplinkwifi.net>, and log in with password you set for the router.
2. Go to [Settings](#) > [Wireless](#) > [WPS](#).

### Use the WPS button

Click [WPS start](#) button on the page, and immediately tap the [WPS](#) button on your WPS-supported devices such as Android phones, tablets or most network cards within two minutes.

#### WPS Method

Method One--Push Button(recommended)  
Connect to this router via WPS button.



### Set the Router's PIN

Router's PIN is enabled by default to allow wireless devices to connect to the router using the PIN. You can use the default one or generate a new one.

Router's PIN

---

Router's PIN:


PIN: 35498841 [Generate](#) [Default](#)

#### Note:

- If you want to enable/disable the WPS feature, go to [System Tools](#) > [System Parameters](#) > [WPS](#), check or uncheck the box for [Enable WPS](#).
- PIN (Personal Identification Number) is an eight-character identification number preset to each router. WPS supported devices can connect to your router with the PIN. The default PIN is printed on the label of the router.

## Use the Client's PIN

Enter the client's PIN in the field, and click **Connect**.

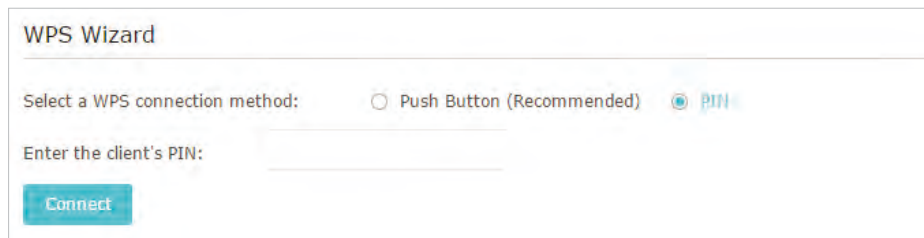

3. **Success** will appear on the above screen and the WPS LED on the router will keep on for five minutes if the client has been successfully added to the network.

## 6. 5. Customize Your Network

### 6. 5. 1. Change LAN Settings

The extender is preset with a default LAN IP 192.168.0.254, with which you can log in to the web management page. The LAN IP address, together with the Subnet Mask, also defines the subnet that the connected devices are on. If the IP address conflicts with another device on your local network or your network requires a specific IP subnet, you can change it.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to **Settings > Network > LAN**.
3. Select **Use the following IP address**.
4. Enter a new IP address as needed and leave the **Subnet Mask** as the default settings and enter the gateway that is in the same subnet as the IP address. The gateway is usually the LAN IP address of your extender.



5. Click **Save**.

## 6.5.2. Specify DHCP Server Settings

By default, the DHCP (Dynamic Host Configuration Protocol) Server is enabled and the extender acts as a DHCP server; it dynamically assigns TCP/IP parameters to client devices from the IP Address Pool. You can change the settings of the DHCP Server if necessary.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [Network](#) > [DHCP Server](#).

➤ **To specify the IP address that the extender assigns:**

**DHCP Server Settings**

DHCP Server:  Auto  On  Off

IP Address Pool:  -

Address Lease Time:  minutes (1 default, 2880 maximum)

Default Gateway:  (Optional)

Primary DNS:  (Optional)

Secondary DNS:  (Optional)

[Save](#)

1. Select [Auto](#) (recommended) or [On](#) to enable the DHCP Server.
2. Enter the starting and ending IP addresses in the [IP Address Pool](#).
3. Enter other parameters if the ISP requires them. The [Default Gateway](#) is automatically filled in and is the same as the LAN IP address of the extender.
4. Click [Save](#).

➤ **To view the DHCP Client List:**

You can view the information of the DHCP clients connected to the extender in the DHCP Client List.

**DHCP Client List**

Client Number: 1 [Refresh](#)


ID	Client Name	MAC Address	Assigned IP Address	Lease Time
1		FC-AA-14-C4-3D-0C	192.168.0.100	00:00:43



### 6.5.3. Adjust Wi-Fi Coverage

You can set the extender's Wi-Fi coverage depending on how large you want your Wi-Fi area to be.

1. Visit <http://tplinkwifi.net> and log in with the password you set for the extender.
2. Go to [Settings > Advanced Settings > Wi-Fi Coverage](#).
3. Select [Min](#), [Mid](#) or [Max](#) to adjust your Wi-Fi coverage of the extender.

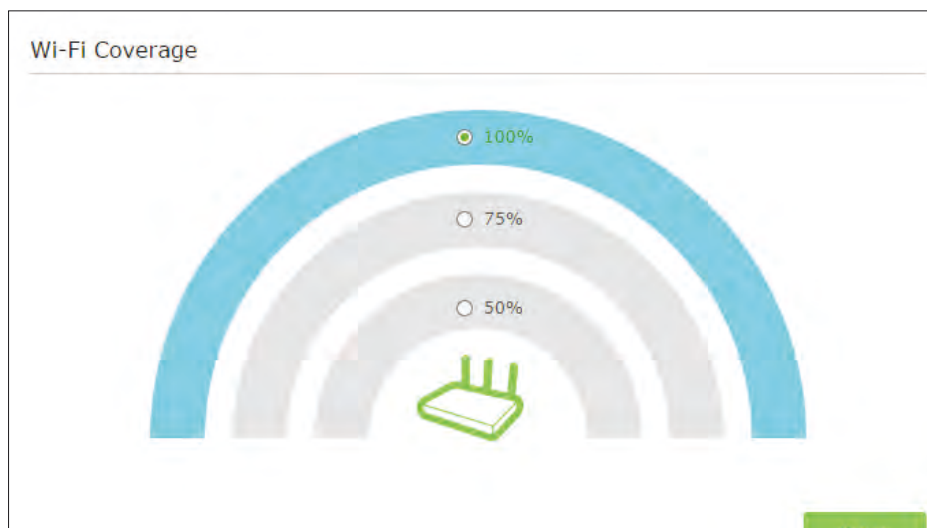

4. Click [Save](#).

### 6.5.4. Set Access Control

Access Control allows you to permit or block specific devices from accessing the Internet for a specific period.

1. Visit <http://tplinkwifi.net> and log in with the password you set for the extender.
2. Go to [Settings > Advanced Settings > Access Control](#).
3. Enable [Access Control](#).



#### ➤ To block specific device(s):

##### ■ Note:

Devices connected to the extender via an Ethernet cable cannot be blocked.

1. Select [Blacklist](#) and click [Save](#).

Access Mode

Default Access Mode:  Blacklist  Whitelist

SAVE

2. Select the device to be blocked in the [Online Devices](#) table by ticking the corresponding checkbox.
3. Click [Block](#) and the selected device(s) will be added to the [Devices in Blacklist](#) table.

Online Devices

Refresh Block

<input type="checkbox"/>	ID	Device Name	IP Address	MAC Address	Connection Type	Modify
<input type="checkbox"/>	1		192.168.0.102		Wireless	

4. Click in the [Devices in Blacklist](#) table to set the [Effective Time](#) for a certain entry as needed.

Device Name:

MAC Address:

Effective Time:  Cannot access at any time  
 Cannot access based on the time schedule

Time:  :  :  :

Day(s):   Monday  Tuesday  
 Wednesday  Thursday  
 Friday  Saturday  
 Sunday

Cancel OK

5. Click [OK](#).

➤ **To permit specific device(s):**

1. Select [Whitelist](#) and click [Save](#).

Access Mode

Default Access Mode:  Blacklist  Whitelist

SAVE

2. Click [Add](#) in the [Devices in Whitelist](#) table. Enter the [Device Name](#) and [MAC Address](#). And you can set the [Effective Time](#) for a certain entry as needed.

3. Click **OK**.

## 6. 6. Manage the Router

### 6. 6. 1. Set Up System Time

The System Time of the extender will be used for time-based functions such as the Power Schedule function. If you have enabled the Daylight Saving Time feature, the system time will be synchronized with the daylight saving time you configure.

4. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.

5. Go to **Settings > System Tools > Time Settings**.

#### ➤ To get system time:

1. Select your local **Time Zone** from the drop-down list.

2. Click **Save**.

#### ➤ To set up Daylight Saving Time:

1. Select **Enable Daylight Saving Time**.

**Daylight Saving Time**

Enable Daylight Saving Time

Start: 2016 Mar Last Sun 1 AM

End: 2016 Oct Last Sun 1 AM

Current Status: Daylight Saving Time is not active.

Save

2. Select the **Start** and **End** date and time of the daylight saving time at your local time zone.
3. Click **Save**.

### 6.6.2. Control LEDs

The LEDs of the extender indicate its activities and status. You can enable the Night Mode feature to specify a time period during which the LEDs are off.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
  2. Go to **Settings > System Tools > LED Control**.
- **To specify a time period when LEDs are off:**
1. Select **Night Mode**.
  2. Specify a time period in the **LED Off Time** field, and the LEDs will be off during this period.
  3. Click **Save**.

**LED Control**

Night Mode

LED Off Time: 21 : 00 - 09 : 00

Note: Before enabling the LED Control, make sure [Time Settings](#) is correct.

Save

### 6.6.3. Upgrade the Firmware

TP-LINK is committed to improving product features, giving you a better network experience. You can download the latest firmware file from the [Support](#) page at our website [www.tp-link.com](http://www.tp-link.com) and upgrade the firmware to the latest version.

■ **Note:**

1. Make sure the latest firmware file is matched with the hardware version (as shown in the download section of the Support page).
2. Make sure that you have a stable connection between the extender and your computer. It is NOT recommended to upgrade the firmware wirelessly.
3. Backup your extender configuration.
4. Do NOT power off the extender during the firmware upgrade.

➤ **To upgrade the firmware online:**

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [System Tools](#) > [Firmware Upgrade](#), and click [Check for upgrade](#) to see whether a new firmware is released.



3. Focus on the [Online Upgrade](#) section, and click [Upgrade](#).



4. Wait a few minutes for the firmware upgrade to complete and the router to reboot.

➤ **To upgrade the firmware locally:**

1. Download the latest firmware file for the extender from our website [www.tp-link.com](http://www.tp-link.com).
2. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
3. Go to [Settings](#) > [System Tools](#) > [Firmware Upgrade](#).
4. Click [Browse](#) to locate the downloaded new firmware file, and then click [Upgrade](#).

5. Wait a few minutes for the firmware upgrade to complete and the router to reboot.

#### 6.6.4. Backup and Restore Configuration Settings

The configuration settings are stored as a configuration file in the extender. You can backup the configuration file and restore the extender to the previous settings from the backup file when needed. Moreover, if necessary, you can erase the current settings and reset the extender to the default factory settings.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings](#) > [System Tools](#) > [Backup & Restore](#).

##### ➤ To backup configuration settings:

Click [Backup](#) to save a copy of the current settings to your local computer. A '.bin' file of the current settings will be stored on your computer.

##### ➤ To restore configuration settings:

1. Click [Browse](#) to locate the backup configuration file stored on your computer, and click [Restore](#).

2. Wait a few minutes for the restore and reboot.

▀ **Note:** During the restore process, do not power off or reset the extender.

##### ➤ To reset the extender to factory default settings:

1. Click [Factory Restore](#) to reset the extender.



2. Wait a few minutes for the reset and reboot.

■ **Note:**

1. During the reset process, do not power off or reset the router.
2. We strongly recommend you backup the current configuration settings before resetting the extender.

### 6.6.5. Change Login Password

The account management feature allows you to change your login password of the management web page.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings > System Tools > Administration](#).
3. Enter the old password, then the new password twice (both case-sensitive) and click [Save](#).



4. Use the new password for future logins.

### 6.6.6. System Log

If the extender is not working normally, you can save the system log and send it to our technical support team.

1. Visit <http://tplinkwifi.net>, and log in with the password you set for the extender.
2. Go to [Settings > System Tools > System Log](#).

➤ **To Save the system log locally:**

1. Choose the type and level of the system log as needed.
2. Click [Save Log](#) to save the system logs to a local disk.

### System Log

Log Filter: Type = ALL Level = ALL

[Refresh](#) [Delete All](#)

ID	Time	Type	Level	Content
5	0 days 00:10:59	DHCPC	ERROR	DHCP detection failed.
4	0 days 00:10:56	DHCPC	INFO	Sent a detection for DHCP.
3	0 days 00:10:53	DHCPC	INFO	Sent a detection for DHCP.
2	0 days 00:10:50	DHCPC	INFO	Sent a detection for DHCP.
1	0 days 00:10:47	OTHERS	INFO	User cleared up all the logs.

[Save Log](#)



# FAQ

## Q1. What can I do if I forgot my wireless password?

The default wireless password is printed on the label of the router. If the password has been altered, please connect your computer to the router using an Ethernet cable and follow the steps below:

1. Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
2. Go to [Wireless\\_> Wireless Security](#) to retrieve or reset your wireless password.

## Q2. What can I do if I forgot my login password of the web management page?

The default username and password of the web management page are [admin](#) (in lowercase).


**If you have altered the username and password but Password Recovery is disabled:**

1. Reset the router to factory default settings: press and hold the Reset button for about 7 seconds and then release;
2. Visit <http://tplinkwifi.net>, and enter [admin](#) (in lowercase) as both username and password to log in.

**Note:** You'll need to reconfigure the router to surf the Internet once the router is reset, and please mark down your new password for future use.

## Q3. What can I do if I cannot log in to the router's web management page?


1. This can happen for a variety of reasons. Please try the methods below to log in again.
  - Make sure your computer has connected to the router correctly and the corresponding LED light up.
  - Make sure the IP address of your computer is configured as [Obtain an IP address automatically](#) and [Obtain DNS server address automatically](#).
2. Make sure you enter the correct IP address to log in: <http://tplinkwifi.net>.
  - Check your computer's settings:
3. Go to [Start > Control Panel > Network and Internet](#), and click [View network status and tasks](#).
  - 1) Click [Internet Options](#) on the bottom left.
  - 2) Click [Connections](#) and select [Never dial a connection](#).

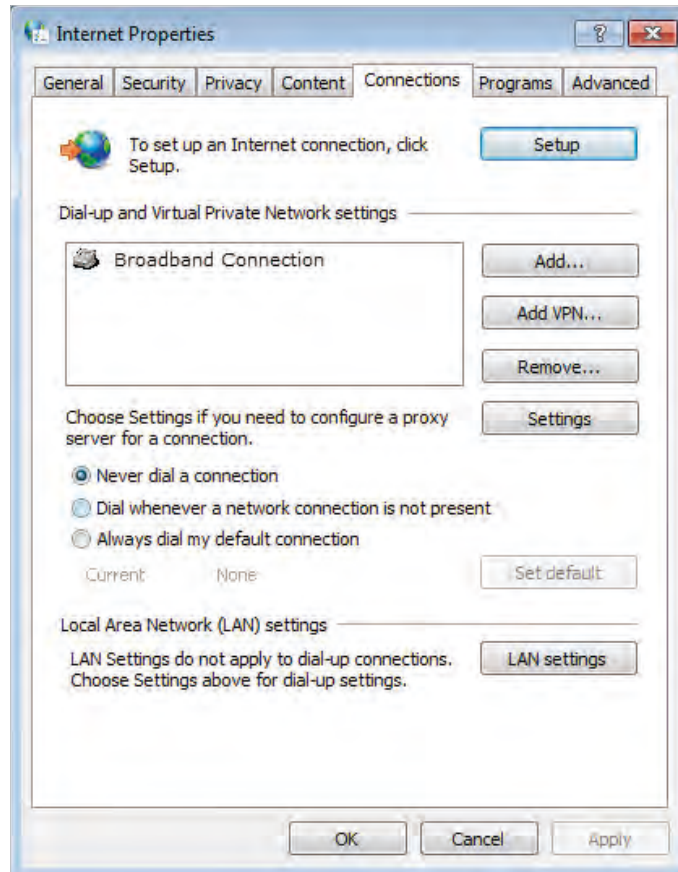

3) Click [LAN settings](#) and deselect the following three options, and click [OK](#).



- 4) Go to **Advanced** > **Restore advanced settings**, and click **OK** to save the settings.

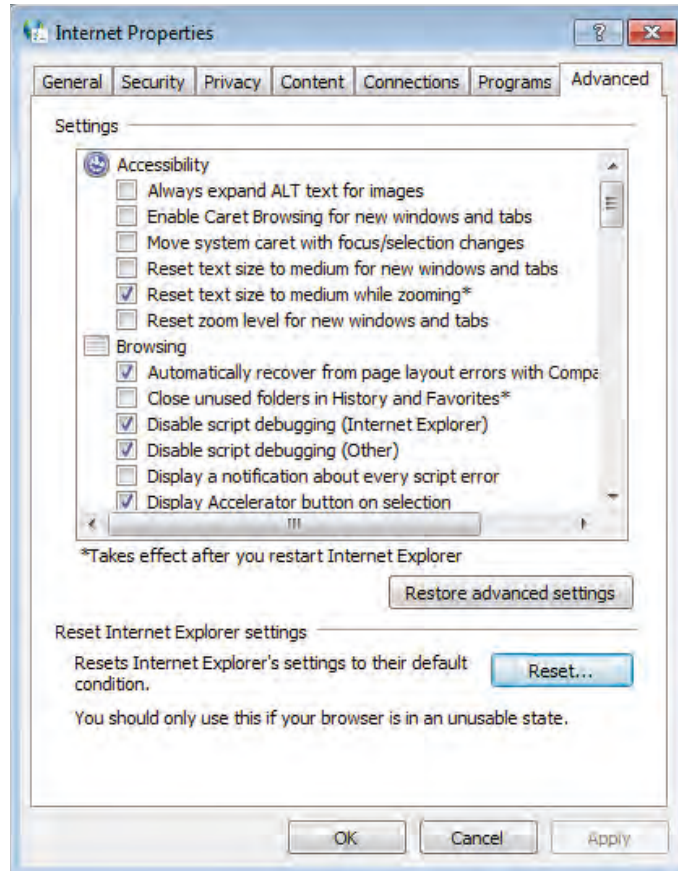

- Use another web browser or computer to log in again.
- Reset the router to factory default settings and try again. If the login still fails, please contact the technical support.
  - **Note:** You'll need to reconfigure the router to surf the Internet once the router is reset.

#### Q4. How to use the WDS Bridging function to extend my wireless network?

For example, my house covers a large area. The wireless coverage of the router I'm using (the root router) is limited. I want to use an extended router to extend the wireless network of the root router.

■ **Note:**

- WDS bridging only requires configuration on the extended router.
1. Visit <http://tplinkwifi.net>, and log in to with the username and password you set for the router.
  2. Configure the IP address of the router:
    - 1) Go to **Network** > **\_LAN**, configure the IP address of the extended router to be in the same subnet with the root router; (For example, the IP address of the root router is 192.168.0.1, the IP address of the extended router can be 192.168.0.2~192.168.0.254. We take 192.168.0.2 as example.)

2) Click [Save](#).

**Note:** Log in to the web management page again if the IP address of the router is altered.

The screenshot shows the LAN configuration page. It includes the following fields and values:

- MAC Address: 0C-4A-08-45-F3-60
- IP Address: 192.168.0.1
- Subnet Mask: 255.255.255.0
- IGMP Proxy: Enable

A red note below the IGMP Proxy field states: "Note:IGMP(Internet Group Management Protocol) works for IPTV multicast stream.The device supports both IGMP proxy with enabled/disabled option and IGMP-snooping."

A "Save" button is located at the bottom of the form.

3. Survey the SSID to be bridged:

- 1) Go to [Wireless > Wireless Settings](#) and click [Enable WDS Bridging](#).
- 2) Click [Survey](#), locate the root router's SSID and click [Choose](#) (Here we take TP-LINK\_2512 as example).
- 3) If the root router is set with a wireless password, you should enter the wireless password of the root router.
- 4) Click [Save](#).

The screenshot shows the Wireless Settings page. The "Enable WDS Bridging" checkbox is checked. Below this, there are fields for "SSID (to be bridged)" and "BSSID (to be bridged)". A "Survey" button is located below the BSSID field. Other settings include:

- Wireless Network Name: (empty)
- Mode: 11bgn mixed
- Channel Width: Auto
- Channel: Auto
- Enable Wireless Router Radio: checked
- Enable SSID Broadcast: checked
- WDS Mode: Auto
- Key type: None
- WEP Index: 1
- Auth type: open
- Password: (empty)

A "Save" button is located at the bottom of the form.

4. Disable DHCP:

- 1) Go to [DHCP](#), select [Disable](#), and click [Save](#).

Now you can go to [Status](#) to check the WDS status. When the [WDS status](#) is [Run](#), it means WDS bridging is successfully built.


## Q5. What can I do if I cannot access the Internet even though the configuration is finished?

1. Visit <http://tplinkwifi.net>, and log in to with the username and password you set for the router.
2. Go to [Status](#) to check WAN status:

If IP Address is a valid one, please try the methods below and try again:

- Your computer might not recognize any DNS server addresses, please manually configure DNS server.
  - 1) Go to [DHCP](#).
  - 2) Enter 8.8.8.8 as Primary DNS, and click [Save](#).

 **Tips:** 8.8.8.8 is a safe and public DNS server operated by Google.

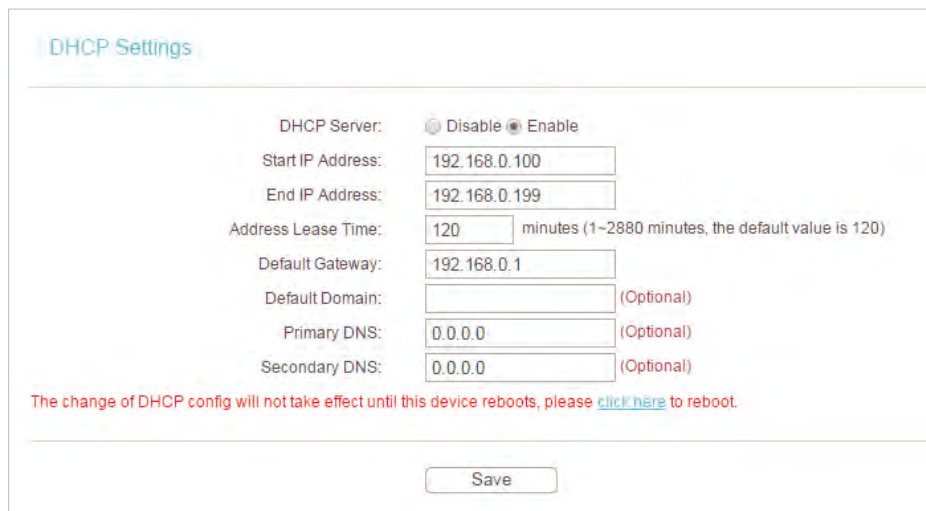

DHCP Settings

DHCP Server:  Disable  Enable

Start IP Address:

End IP Address:

Address Lease Time:  minutes (1~2880 minutes, the default value is 120)

Default Gateway:

Default Domain:  (Optional)

Primary DNS:  (Optional)

Secondary DNS:  (Optional)

The change of DHCP config will not take effect until this device reboots, please [click here](#) to reboot.

- Restart the modem and the router.
  - 1) Power off your modem and the router, and leave them off for 1 minute.
  - 2) Power on your modem first, and wait about 2 minutes.
  - 3) Power on the router, and wait another 1 or 2 minutes and check the Internet access.
- Reset the router to factory default settings and reconfigure the router.
- Upgrade the firmware of the router.
- Check the TCP/IP settings on the particular device if all other devices can get Internet from the router.

If the IP Address is 0.0.0.0, please try the methods below and try again:

- Make sure the physical connection between the router and the modem is proper.
- Clone the MAC address of your computer.

- 1) Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
- 2) Go to **Network > MAC Clone**, select **Clone MAC Address** and click **Save**.



**Tips:**


- Some ISP will register the MAC address of your computer when you access the Internet for the first time through their Cable modem, if you add a router into your network to share your Internet connection, the ISP will not accept it as the MAC address is changed, so we need to clone your computer's MAC address to the router.
- The MAC addresses of a computer in wired connection and wireless connection are different.

- **Modify the LAN IP address of the router.**

**Note:**

Most TP-LINK routers use 192.168.0.1/192.168.1.1 as their default LAN IP address, it may conflict with the IP range of your existent ADSL modem/router. If so, the router is not able to communicate with your modem and cause you can't access the Internet. To resolve this problem, we need to change the LAN IP address of the router to avoid such conflict, for example, 192.168.2.1.

- 1) Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
- 2) Go to **Network > LAN**.
- 3) Modify the LAN IP address as the follow picture shows. Here we take 192.168.2.1 as an example.
- 4) Click **Save**.

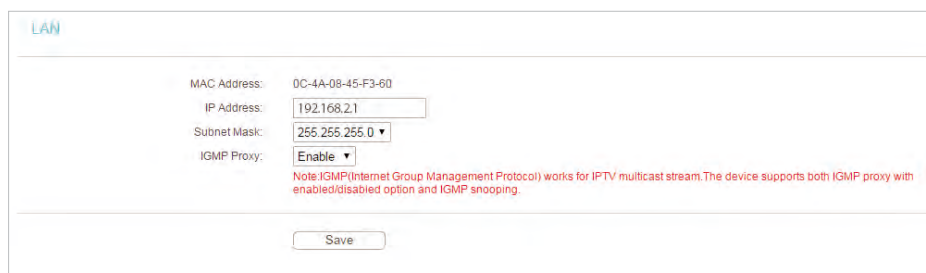

- **Restart the modem and the router.**

- 1) Power off your modem and the router, and leave them off for 1 minute.
- 2) Power on your modem first, and wait about 2 minutes.
- 3) Power on the router, and wait another 1 or 2 minutes and check the Internet access.

- Double check the Internet Connection Type.
  - 1) Confirm your Internet Connection Type, which can be learned from the ISP.
  - 2) Visit <http://tplinkwifi.net>, and log in with the username and password you set for the router.
  - 3) Go to [Network > WAN](#).
  - 4) Select your [WAN Connection Type](#) and fill in other parameters.
  - 5) Click [Save](#).

6) Restart the modem and the router.

- Please upgrade the firmware of the router.

If you've tried every method above but cannot access the Internet, please contact the technical support.

## Q6. What can I do if I cannot find my wireless network or I cannot connect the wireless network?

If you fail to find any wireless network, please follow the steps below:

- Make sure the wireless function of your device is enabled if you're using a laptop with a built-in wireless adapter. You can refer to the relevant document or contact the laptop manufacturer.
- Make sure the wireless adapter driver is installed successfully and the wireless adapter is enabled.

- **On Windows 7**

- 1) If you see the message **No connections are available**, it is usually because the wireless function is disabled or blocked somehow.

- 2) Clicking **Troubleshoot** and windows might be able to fix the problem by itself.

- **On Windows XP**

- 1) If you see the message **Windows cannot configure this wireless connection**, this is usually because windows configuration utility is disabled or you are running another wireless configuration tool to connect the wireless.

- 2) Exit the wireless configuration tool (the TP-LINK Utility, for example).

- 3) Select and right click **My Computer** on Desktop, and select **Manage** to open Computer Management window.

- 4) Expand **Services and Applications > Services**, and find and locate **Wireless Zero Configuration** in the Services list on the right side.

- 5) Right click **Wireless Zero Configuration**, and then select **Properties**.

- 6) Change **Startup type** to **Automatic**, click **Start** and make sure the Service status is **Started**. And then click **OK**.

**If you can find other wireless network except your own, please follow the steps below:**

- Check the WLAN LED indicator on your wireless router/modem.
- Make sure your computer/device is still in the range of your router/modem. Move closer if it is currently too far away.

**If you can find your wireless network but fail to connect, please follow the steps below:**

- **Authenticating problem/password mismatch:**

- 1) Sometimes you will be asked to type in a PIN number when you connect to the wireless network for the first time. This PIN number is different from the Wireless Password/Network Security Key. Usually you can only find it on the label of your router.






- 2) If you cannot find the PIN or PIN failed, you may choose [Connecting using a security key instead](#), and then type in the [Wireless Password/Network Security Key](#).
- 3) If it continues to show note of [Network Security Key Mismatch](#), it is suggested to confirm the wireless password of your wireless router.

 **Note:** Wireless Password/Network Security Key is case sensitive.

- **Windows unable to connect to XXXX / Can not join this network / Taking longer than usual to connect to this network:**
  - Check the wireless signal strength of your network, if it is weak (1~3 bars), please move the router closer and try again.
  - Change the wireless Channel of the router to 1,6,or 11 to reduce interference from other networks.
  - Re-install or update the driver for your wireless adapter of the computer.

## **COPYRIGHT & TRADEMARKS**

Specifications are subject to change without notice.  is a registered trademark of TP-LINK TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders.

No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK TECHNOLOGIES CO., LTD. Copyright © 2016 TP-LINK TECHNOLOGIES CO., LTD. All rights reserved.

## FCC STATEMENT



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

### **FCC RF Radiation Exposure Statement**

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

This device is restricted to indoor use only.

## CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

## RF Exposure Information

This device meets the EU requirements (1999/5/EC Article 3.1a) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

## National restrictions

Restricted to indoor use.

## Canadian Compliance Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. l'appareil ne doit pas produire de brouillage;
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This radio transmitter (IC: 8853A-Archer C28HP/ Model: Archer C28HP) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list below, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio (IC: 8853A-Archer C28HP/ Model: Archer C28HP) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste ci-dessous et dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Antenna	One 5GHz 3.34dBi detachable antenna (RP-SMA) Two 2.4GHz 6.45dBi internal antennas
---------	--

**Caution:**

1. The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
2. For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
3. For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and

The high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

DFS (Dynamic Frequency Selection) products that operate in the bands 5250- 5350 MHz, 5470-5600MHz, and 5650-5725MHz.

**Avertissement:**

1. Le dispositif fonctionnant dans la bande 5150-5250 MHz est réservé uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
2. Le gain maximal d'antenne permis pour les dispositifs avec antenne(s) amovible(s) utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limitation P.I.R.E.;
3. Le gain maximal d'antenne permis pour les dispositifs avec antenne(s) amovible(s) utilisant la bande 5725-5850 MHz doit se conformer à la limitation P.I.R.E spécifiée pour l'exploitation point à point et non point à point, selon le cas.

En outre, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Les produits utilisant la technique d'atténuation DFS (sélection dynamique des fréquences) sur les bandes 5250- 5350 MHz, 5470-5600MHz et 5650-5725MHz.

**Radiation Exposure Statement:**

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

## Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)

## Korea Warning Statements:

당해 무선설비는 운용중 전파혼신 가능성이 있음.

## NCC Notice & BSMI Notice:

注意！

依據 低功率電波輻射性電機管理辦法

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性或功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通行；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信規定作業之無線電信。低功率射頻電機需忍受合法通信或工業、科學以及醫療用電波輻射性電機設備之干擾。

工作在5.25GHz~5.35GHz頻段的无线产品，还需添加如下NCC警语：

於5.25GHz至5.35GHz區域內操作之無線設備的警告聲明  
工作頻率5.250~5.350GHz該頻段限於室內使用。

## 安全諮詢及注意事項


- 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。
- 清潔本產品之前請先拔掉電源線。請勿使用液體、噴霧清潔劑或濕布進行清潔。
- 注意防潮，請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用，以確保本產品的操作可靠並防止過熱，請勿堵塞或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風，否則不可放在密閉位置中。
- 請不要私自打開機殼，不要嘗試自行維修本產品，請由授權的專業人士進行此項工作。



Продукт сертифіковано згідно с правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.





## Safety Information

- When product has power button, the power button is one of the way to shut off the product; when there is no power button, the only way to completely shut off power is to disconnect the product or the power adapter from the power source.
- Don't disassemble the product, or make repairs yourself. You run the risk of electric shock and voiding the limited warranty. If you need service, please contact us.
- Avoid water and wet locations.
- Adapter shall be installed near the equipment and shall be easily accessible.
- The plug considered as disconnect device of adapter.
-  Use only power supplies which are provided by manufacturer and in the original packing of this product. If you have any questions, please don't hesitate to contact us.

For EU/EFTA, this product can be used in the following countries:

AT	BE	BG	CH	CY	CZ	DE	DK
EE	ES	FI	FR	GB	GR	HR	HU
IE	IS	IT	LI	LT	LU	LV	MT
NL	NO	PL	PT	RO	SE	SI	SK

## Explanations of the symbols on the product label

Symbol	Explanation
	DC voltage
	<p>RECYCLING</p> <p>This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/ EU in order to be recycled or dismantled to minimize its impact on the environment.</p> <p>User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.</p>