

Connect

I. Select a location for your Philips ADSL Wireless Base Station

Install the ADSL Wireless Base Station near your PC or another location where you have easy access. Keep ethernet cables away from power cords and other sources of electrical interference. Place the ADSL Wireless Base Station, with the antenna in upright position, in a location where air can circulate freely around it.

2. Plug the Power Supply into an appropriate electrical outlet

Connect the other end to the Power Input on the back side of the ADSL Wireless Base Station. The LED light (PWR) should come on solid green.

3. Connect the ADSL Wireless Base Station to your ADSL RJI I wall jack


Plug one end of the black RI-11 Telephone Cable into the port labeled "ADSL" on the ADSL Wireless Base Station back panel until you feel it click. Insert the other end of the telephone cable into the telephone jack (or filter/splitter) connected to your ADSL service. The ADSL light should blink for up to two minutes and then come on solid green.

4. Connect the Wireless Basestation + ADSL Modem to your computer

Connect one end of the RI-45 Ethernet Cable to your PC's Ethernet port and the other end to one of the LAN ports of the ADSL Wireless Base Station. The LAN indicator light should come on solid green for the port where you connected your Ethernet cable.

Note: Users with an existing Wi-Fi network should preform the inital installation process using the provided ethernet cable.

SNA6500 Rear View

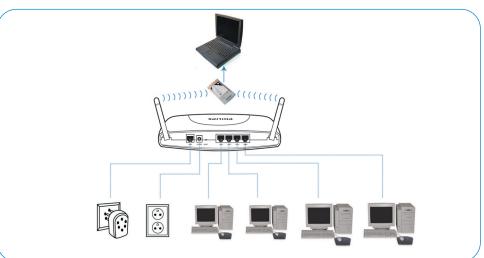

Connect each computer or other device in your network to the ADSL Wireless Base Station with an Ethernet cable or wirelessly.

Install

Insert Installation CD

Place the installation CD in the CD-Drive





Agree License Agreement Click **Agree**

If this screen does not appear, start the CD manually

- Open My Computer
- Open CD-Drive
- Open Setup.exe



Select Wireless Base Station Click on the SNA6500 image



Back • 🔘 · 📓 📓 🐔 Address 🗿 http://192.160.2.1/setupw.str PHILIPS 1. Getting started Make sure the ADSL telepone cable is connected correctly to the SNA6500

Wireless Mode Mixed (11b+11g)

3 Back * 🔘 - 🗷 🖒 🔥 Address 🗿 http://192.168.2.1/setupw.stm

2. Wireless settings

PHILIPS

3. "Wireless settings"

2. "Getting Started"

click the **NEXT** button.

Follow the instructions on the screen and


For easy installation keep the default wireless settings. If you later would like to change any of the wireless settings you can do so via the menu in the ADSL Wireless Base Station.



4. "ADSL settings"

BACK NEXT

In step 3 you have to enter the settings supplied to you by your ADSL Internet Service Provider (ISP). For easy installation you can select your ISP from a list of predefined ADSL ISP's per country.



BACK SAVE SETTINGS

🕝 Back * 🔘 - 🗷 🙎 🐔 Address 📵 http://192.168.2.1/setupw.stm

ting started 4. Confirm

G Back ▼ 🕞 😨 🛣 🚳 Address 📵 http://192.168.2.1

Please click the "OK" to enter the main menu

PHILIPS

PHILIPS

If you cannot find your ISP in the list you can enter the settings manually. To do so select as 'Country' 'others' and select from the 'Internet Service Provider' list the ADSL protocol your ISP is using (this should be mentioned in the documentation you received from your

5. "Confirm"

Make sure the information you entered is correct. If you want to make changes, click the 'Back' button to go back to Step 3.


After you've clicked "SAVE SETTINGS" a message will appear "Your data is being saved".

6. "Connection Status"

Step 5 shows if you have a working Internet connection or not. If you have connection you will see the following message

Share broadband Internet throughout the home

Follow these simple steps to connect to the Internet.





Wireless freedom

Enjoy the freedom of wireless networking. Your computer is now ready for use in multiple rooms of your home

For additional help read the manual on the CDROM.



Need Help?

User manual

See the user manual that came with your Wireless Base Station Hulp on line: www.philips.com/support

On-line Help

UK (United Kingdom)

België/Belgique/Belgien 070 253 010 (€ 0.17) 800 92256 Danmark 3525 8761 Deutschland 0180 5 007 532 (€ 0.12) España 902 888 785 (€ 0.15) France 08 9165 0006 (€ 0.23) Έλληνας 0 0800 3122 1223 Ireland 01 601 1161 199 404 042 (€ 0.25) Luxemburg/Luxembourg 26 84 30 00 0900 0400 063 (€ 0.20) Norge 2270 8250 Österreich 01 546 575 603 (low rate) 2 1359 1440 Schweiz/Suisse/Svizzera 02 2310 2116 Suomi 09 2290 1908

08 632 0016

0906 1010 017 (£ 0.15)

QSG-SNA6500-ENG-V1.0

ADSL Wireless Base Station

SNA6500


Welcome

Quick Start Guide



What's in the box

You should have all of these:



ADSL Wireless Base Station

Manual on CD





Power Supply



Telephone Cable



Quick Start Guide

Grey RJ-45 Ethernet Cable

If you don't have everything, contact your supplier immediately.