

# Wireless 2.4GHz | Wireless N | 300Mbps WAP-5883 Wireless Range Extender



The Comtrend WAP-5883 Wireless Range Extender is a three-in-one device to support the wireless needs of both home and office environments. Using the 802.11b/g/n wireless standard, the WAP-5883 has a data transfer rate of up to 300Mbps. Its modes are instantly accessible by a three-position switch on its exterior. When set to Repeater mode, the WAP-5883 extends wireless coverage of your existing Access Point to typically hard-to-reach areas. When connected to a network using an Ethernet cable, AP mode turns the WAP-5883 into an Access Point. And Client mode allows compatible Ethernet devices, like game consoles and Blu-ray devices to connect to a wireless network.

Small in size, the WAP-5883 is easy to install. By plugging directly into the wall, there is no long cord or external power supply. No guess work is needed for placement, as the LED signal indicator shows the wireless performance at its location. For set-up and security, the WAP-5883 includes a WPS button, allowing instant security when paired with another device. Configuration is quickly accomplished through a simple web-based user interface.

# **WAP-5883** 2.4GHz | Wireless N | 300Mbps



## **Specifications**

## Ethernet

RJ-45 X 1 for Ethernet connection 10/100 Auto MDI/MDI-X

#### Frequency Band

· 2.4000~2.4835GHz

## Data Rate

- · 11b: 1/2/5.5/11Mbps, 11g: 6/9/12/24/36/48/54Mbps
- · 11n (20MHz): MCS0-15, up to 144Mbps
- · 11n (40MHz): MCS0-15, up to 300Mbps

## **Output Power**

· 11b: 17±1.5dBm , 11g: 14±1.5dBm, 11n: 13±1.5dBm

#### Receive Sensitivity

- · 11b@11Mbps: -85±2dBm, 11g@54Mbps: -71±2dBm
- · 11n(20MHz)@MCS15: -67±2dBm
- 11n(40MHz)@MCS15: -63±2dBm

### Security

- · WEP 64/128, WPA, WPA2, IEEE 802.1x Antenna
- Internal Antenna x 2 (2T2R)

#### Dimensions


- · 46.5 (H) x 73(W) x 41(D) mm (power plug is excluded) Temperature
- · Operating: 32~104°F, Storage: -4~140°F

#### Humidity

- Operating: 10~90% (Non Condensing)
  Storage: Max. 95% (Non Condensing)

#### Certification

 $\cdot CE$ Product specifications may change without notice

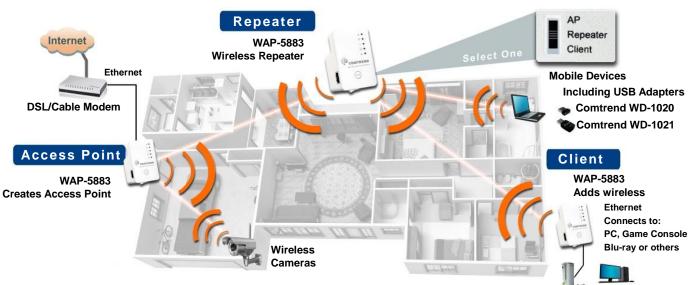

Repeater mode extends the wireless network for 802.11 (b/g/n) devices.

#### Taiwan:

3F-1,No.10, Lane 609, Chung Hsin Road Section 5, San Chung Dist., New Taipei City, Taiwan 24159 Tel: 886-2-2999-8261 Fax: 886-2-2999-8497

#### China:

NO.88 East QianJin Road, Kunshan City, JiangSu, China Tel: 86-512-57383156, 86-512-57383157, 86-512-57384515 Fax: 86-512-57383155

#### Spain:

Edif. América II C/Prócion,7 portal 3 bajo H 28023 Madrid, Spain

Tel: 34-917990403 Fax: 34-913510999

## France:

87, Rue du Gouverneur Général Félix Eboué 92130 Issy-les-Moulineaux, France Tel: 33-1-70715700 Fax: 33-1-70715701

#### USA & Canada:

16 Goodyear, Suite 120, Irvine, CA 92618, USA Tel: 1-949-753-9640 Fax: 1-949-753-9020

Brazil: AlCampinas 977-7°. Foor-Room 71/72- Jardins Zip Code: 01404-001 - São Paulo - SP - Brazil . Tel: 00 55 11 3052-2295 Fax: 00 55 11 3052-2295

#### Czech Republic:

TOKOVO Jankovcova 1518/2, 170 00, Prague 7, Czech Republic Tel: 420-266-782040 Fax: 420-266-782990

## All-in-One: Wireless Repeater, Access Point, or Client